

ARCUS SPEC 3D MEDIUM

Indoor · Dual Bending · Static White

Features

- 3D bending design, 1-Step MacAdam, CRI>95, excellent TM-30, with light output up to 242 lm/ft.
- IP54 rated, ideal for indoor uses
- 5 years warranty

Applications

Living rooms, TV walls, feature walls, under-cabinet areas, staircases, ceiling coves, hallways, etc.

Date

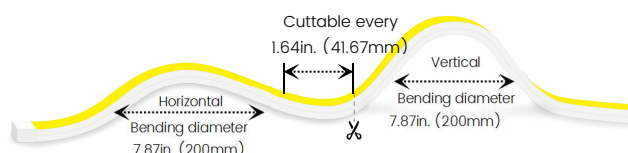

Fixture type

Project name

Project phase



Dimensions



Order Code

Model	Environment	Voltage	CCT	Power	End Cap	Left Feed Entry
AS3DM	D4-Dry (IP54)	24-DC24V	27-2700K 30-3000K 35-3500K 40-4000K	305-3.05W/ft	IJ Injected (IP54) IJC Clear injected (IP54) SEC Silicone (IP54)	F Front OW Open wire 3.28ft (1m) B Bottom MC Male connector with 0.98ft (30cm) cable S Side FC Female connector with 0.98ft (30cm) cable C Closed NA Only for Closed Feed Entry

*Injected and clear injected end cap are factory-made only.

Assembly Builder

Assembly Builder

Right Feed Entry				Length	
F Front	OW	Open wire 3.28ft (1m)		Max. nominal	16.4ft (5m)
B Bottom	MC	Male connector with 0.98ft (30cm) cable		Increment	1.64in. (41.67mm)
S Side	FC	Female connector with 0.98ft (30cm) cable			
C Closed	NA	Only for Closed Feed Entry			

*We will manufacture to the requested length considering the increment length.

Mounting Order Code

Product Code

Please select on the Mounting Options page.

Lumen Output (lm/ft)

Temp./Color	3.05W/ft
2700K	219
3000K	231
3500K	240
4000K	242
Max. Run for Class 2*	16.4ft (5m)


Technical Details

Efficacy	79.3lm/W @4000K 3.05W
CRI	Ra ≥ 90
Beam Angle	120°
LED MacAdam	1 steps
Average Life (L70)	> 44,000 hours
Storage Temperature	-40-140°F (-40°C- 60°C)
Operating Temperature	-40-113°F (-40°C- 45°C)

ARCUS SPEC 3D MEDIUM

Indoor · Dual Bending · Static White

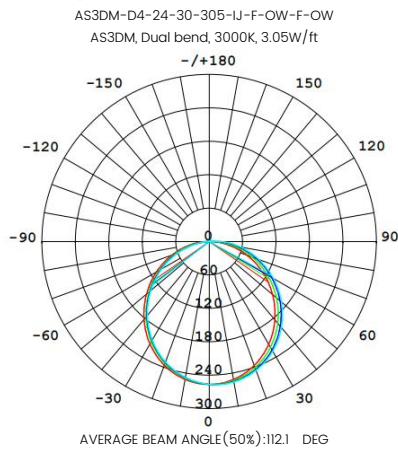Photometry



Zonal Lumen Summary 3000K


Zone	Lumen	% Fixture
0-30	198.0	26%
0-40	323.4	42.5%
0-60	571.5	75%
0-90	747.1	98.1%
0-180	761.8	100%

UNIT: CD


- C0/180, 110.6
- C30/210, 111.5
- C60/240, 112.9
- C90/270, 113.5

Feed Entry / End Cap Options

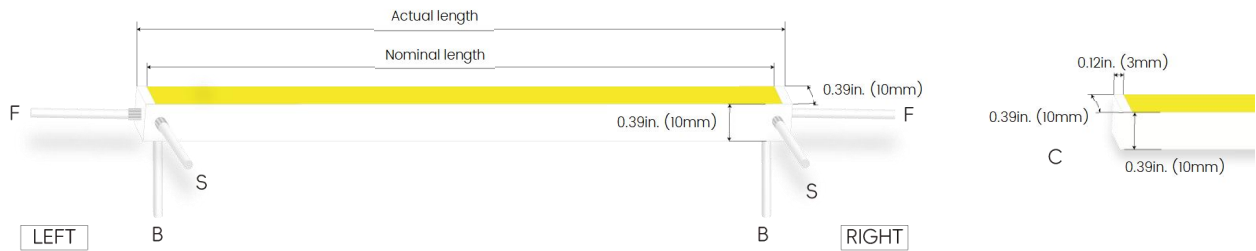
IJ: Injected end cap – IP54, factory-made only



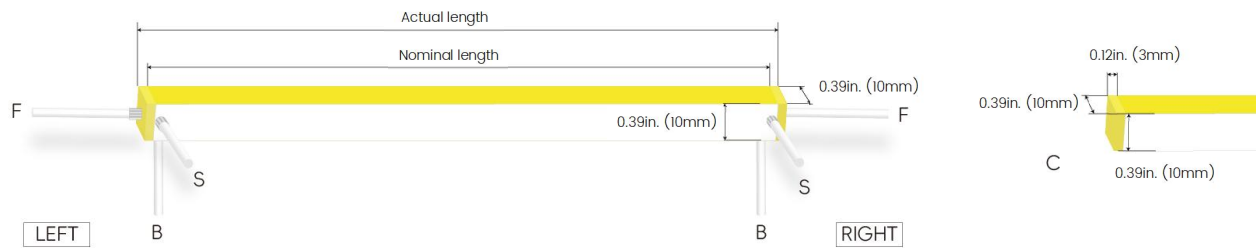IJC: Clear injected end cap – IP54, factory-made only



SEC: Silicone end cap – IP54

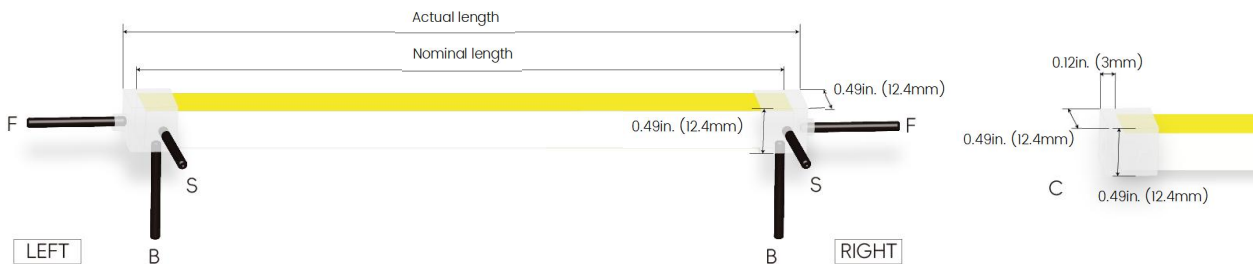

Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG (wire length customizable)



MC: Male connector, **Wet**
Standard 0.98ft (30cm), 20 AWG


















FC: Female connector, **Wet**
Standard 0.98ft (30cm), 20 AWG

ARCUS SPEC 3D MEDIUM

Indoor · Dual Bending · Static White

Mounting Options

	 0.41" (10.4mm) 0.51" (12.9mm) 0.49" (12.4mm)		ARCUS-M-SC <table><tr><td>Name</td><td>Straight surface channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1M)</td></tr></table>	Name	Straight surface channel	Material	Aluminum	Standard Length	3.28ft (1M)
Name	Straight surface channel								
Material	Aluminum								
Standard Length	3.28ft (1M)								
	 0.4" (10.1mm) 0.43" (10.9mm)		ARCUS-M-BC <table><tr><td>Name</td><td>Bendable surface channel</td></tr><tr><td>Material</td><td>Stainless Steel</td></tr><tr><td>Standard Length</td><td>3.28ft (1M)</td></tr></table>	Name	Bendable surface channel	Material	Stainless Steel	Standard Length	3.28ft (1M)
Name	Bendable surface channel								
Material	Stainless Steel								
Standard Length	3.28ft (1M)								
	 0.5" (12.8mm) 0.51" (12.9mm)		ARCUS-M-PC <table><tr><td>Name</td><td>PC channel</td></tr><tr><td>Material</td><td>PC</td></tr><tr><td>Standard Length</td><td>3.28ft (1M)</td></tr></table>	Name	PC channel	Material	PC	Standard Length	3.28ft (1M)
Name	PC channel								
Material	PC								
Standard Length	3.28ft (1M)								
	 2.09" (53mm) 0.44" (11.3mm) 0.53" (13.4mm)		ARCUS-M-MC <table><tr><td>Name</td><td>Mud-in channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1M)</td></tr></table>	Name	Mud-in channel	Material	Aluminum	Standard Length	3.28ft (1M)
Name	Mud-in channel								
Material	Aluminum								
Standard Length	3.28ft (1M)								
	 1.81" (46mm) 0.53" (13.4mm) 0.97" (24.7mm)		ARCUS-M-IC <table><tr><td>Name</td><td>Inside corner channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1M)</td></tr></table>	Name	Inside corner channel	Material	Aluminum	Standard Length	3.28ft (1M)
Name	Inside corner channel								
Material	Aluminum								
Standard Length	3.28ft (1M)								
	 0.53" (13.4mm) 0.88" (22.3mm) 1.98" (50.4mm)		ARCUS-M-OC <table><tr><td>Name</td><td>Outside corner channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1M)</td></tr></table>	Name	Outside corner channel	Material	Aluminum	Standard Length	3.28ft (1M)
Name	Outside corner channel								
Material	Aluminum								
Standard Length	3.28ft (1M)								
	 0.63" (16.1mm) 3.15" (80mm) 0.59" (15.1mm)		ARCUS-M-SBC <table><tr><td>Name</td><td>Skirting board channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1M)</td></tr></table>	Name	Skirting board channel	Material	Aluminum	Standard Length	3.28ft (1M)
Name	Skirting board channel								
Material	Aluminum								
Standard Length	3.28ft (1M)								
	 0.33" (8.5mm) 0.41" (10.5mm)		ARCUS-M-CL <table><tr><td>Name</td><td>Mounting clip</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>0.28in. (7mm)</td></tr></table>	Name	Mounting clip	Material	Aluminum	Standard Length	0.28in. (7mm)
Name	Mounting clip								
Material	Aluminum								
Standard Length	0.28in. (7mm)								

ARCUS SPEC 3D MEDIUM

Indoor · Dual Bending · Static White

End Caps (Optional, purchase for extra)



ARCUS-M-SEC-C
Silicone closed end cap



ARCUS-M-SEC-F-2P
Silicone end cap front entry with 0.98ft (30cm) cable, 2 pin



ARCUS-M-SEC-S-2P
Silicone end cap side entry with 0.98ft (30cm) cable, 2 pin



ARCUS-M-SEC-B-2P
Silicone end cap bottom entry with 0.98ft (30cm) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 20 AWG



FCW-2P-67
Female connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 20 AWG



MCB-2P-67
Male connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 20 AWG



FCB-2P-67
Female connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 20 AWG

ARCUS SPEC 3D MEDIUM

Indoor · Dual Bending · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

ARCUS SPEC 3D MEDIUM

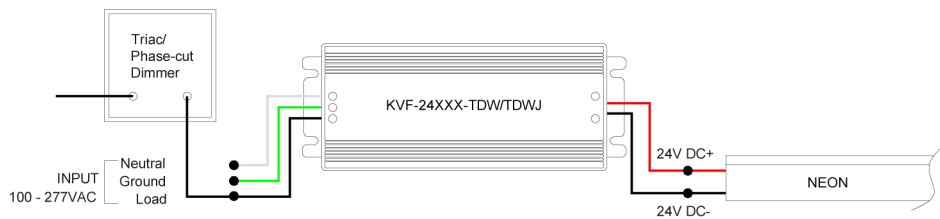
Indoor · Dual Bending · Static White

Wiring Diagram

Non-dimmable



Phase cut/Triac-dimmable



4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



ARCUS SPEC 3D MEDIUM

Indoor · Dual Bending · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG
5W / 0.2A	1730 ft (527.3 m)	784 ft (238.9 m)	397 ft (121.0 m)	263 ft (80.2 m)	175 ft (53.3 m)	131 ft (39.9 m)	107 ft (32.6 m)
10W / 0.4A	865 ft (263.6 m)	392 ft (119.4 m)	199 ft (60.7 m)	132 ft (40.2 m)	88 ft (26.8 m)	66 ft (20.1 m)	54 ft (16.5 m)
15W / 0.6A	577 ft (175.9 m)	261 ft (79.6 m)	132 ft (40.2 m)	88 ft (26.8 m)	58 ft (17.7 m)	44 ft (13.4 m)	36 ft (11.0 m)
20W / 0.8A	433 ft (132.0 m)	196 ft (59.7 m)	99 ft (30.2 m)	66 ft (20.1 m)	44 ft (13.4 m)	33 ft (10.1 m)	27 ft (8.2 m)
25W / 1.0A	346 ft (105.5 m)	157 ft (47.9 m)	79 ft (24.1 m)	53 ft (16.2 m)	35 ft (10.7 m)	26 ft (7.9 m)	22 ft (6.7 m)
30W / 1.3A	289 ft (88.1 m)	131 ft (39.9 m)	66 ft (20.1 m)	44 ft (13.4 m)	29 ft (8.8 m)	22 ft (6.7 m)	18 ft (5.5 m)
35W / 1.5A	248 ft (75.6 m)	112 ft (34.1 m)	57 ft (17.4 m)	38 ft (11.6 m)	25 ft (7.6 m)	19 ft (5.8 m)	15 ft (4.6 m)
40W / 1.7A	217 ft (66.1 m)	98 ft (29.9 m)	50 ft (15.2 m)	33 ft (10.1 m)	22 ft (6.7 m)	16 ft (4.9 m)	13 ft (4.0 m)
45W / 1.9A	192 ft (58.5 m)	87 ft (26.5 m)	44 ft (13.4 m)	29 ft (8.8 m)	19 ft (5.8 m)	14 ft (4.3 m)	12 ft (3.7 m)
50W / 2.1A	173 ft (52.7 m)	78 ft (23.8 m)	40 ft (12.2 m)	26 ft (7.9 m)	18 ft (5.5 m)	13 ft (4.0 m)	11 ft (3.4 m)
55W / 2.3A	157 ft (47.9 m)	71 ft (21.6 m)	36 ft (11.0 m)	24 ft (7.3 m)	16 ft (4.9 m)	12 ft (3.7 m)	10 ft (3.0 m)
60W / 2.5A	144 ft (43.9 m)	65 ft (19.8 m)	33 ft (10.1 m)	22 ft (6.7 m)	15 ft (4.6 m)	11 ft (3.4 m)	9 ft (2.7 m)
65W / 2.7A	133 ft (40.5 m)	60 ft (18.3 m)	30 ft (9.1 m)	20 ft (6.1 m)	14 ft (4.3 m)	10 ft (3.0 m)	8 ft (2.4 m)
70W / 2.9A	124 ft (37.8 m)	56 ft (17.1 m)	28 ft (8.5 m)	19 ft (5.8 m)	13 ft (4.0 m)	10 ft (3.0 m)	8 ft (2.4 m)
75W / 3.1A	116 ft (35.4 m)	52 ft (15.9 m)	26 ft (7.9 m)	17 ft (5.2 m)	12 ft (3.7 m)	9 ft (2.7 m)	7 ft (2.1 m)
80W / 3.3A	109 ft (33.2 m)	49 ft (14.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	11 ft (3.4 m)	8 ft (2.4 m)	7 ft (2.1 m)
85W / 3.5A	103 ft (31.4 m)	46 ft (14.0 m)	23 ft (7.0 m)	15 ft (4.6 m)	10 ft (3.0 m)	8 ft (2.4 m)	6 ft (1.8 m)
90W / 3.8A	97 ft (29.6 m)	44 ft (13.4 m)	22 ft (6.7 m)	15 ft (4.6 m)	10 ft (3.0 m)	7 ft (2.1 m)	6 ft (1.8 m)
96W / 4.0A	91 ft (27.7 m)	41 ft (12.5 m)	21 ft (6.4 m)	14 ft (4.3 m)	9 ft (2.7 m)	7 ft (2.1 m)	6 ft (1.8 m)