

BELA TAPE RGB

Indoor ·RGB

Features


- 3 colors in 1 diode SMD tape, with changeable RGB colors
- IP20 rated, ideal for indoor uses
- 5 years warranty

Applications

Under cabinets, coves, theme parks, bedrooms, studios, etc.



Dimensions

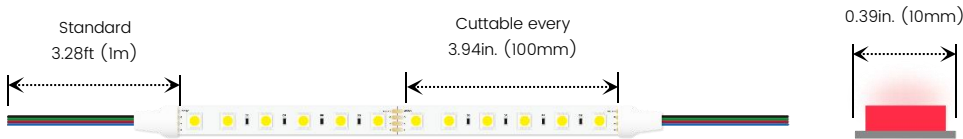

Order Code (For LED tape)

Series	Environment	Voltage	Temp./Color	Power	Assembly Builder			
BELA	D2-Dry (IP20)	24-DC24V	RGB-RGB	439-4.39W/ft	Left Feed Entry			
					F	Front	OW	Open wire 3.28ft (1m), 22 AWG
					C	Closed	MC	Male connector with 0.66ft (20cm) cable, 22 AWG
							FC	Female connector with 0.66ft (20cm) cable, 22 AWG
							NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			Illuminated Length ¹	
F	Front	OW	Open wire 3.28ft (1m), 22AWG	Max. 16.4ft (5m)
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 22AWG	Increment 3.94in.(100mm)
		FC	Female connector with 0.66ft (20cm) cable, 22AWG	
		NA	Only for Closed Feed Entry	

1. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap).

Channel Order Code

Product Code ¹	Colors	Lens	Lengths
Please select on the Channel Compatibility page	S = Silver anodized	OP - Opal	3.28ft (1m)
	W = White lacquered	FR - Frosted	6.56ft (2m)
	B = Black anodized	CL - Clear	

1. Including 3.28ft/6.56ft lens cover + 2pcs end caps+2pcs mounting clips.

Lumen Output (lm/ft)

Temp./Color	4.39W/ft
R	32
G	128
B	24
Max. Run for Class 2*	17.5ft (5.3m)
Max. Run Supported Length	19.7ft (6m)


*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details	
Width	0.39in. (10mm)
LED Quantity	18 LEDs/ft (60 LEDs/M)
Beam Angle	120°
Efficacy	40.1lm/W @RGB 4.39W
Average Life (L70)	> 30,000 hours
Max. Length Per Reel	164ft (50m)
Storage Temperature	-13-140°F (-25°C- 60°C)
Ambient Temperature	-4-113°F (-20°C- 45°C)

Feed Entry Options



Connector Wire Options

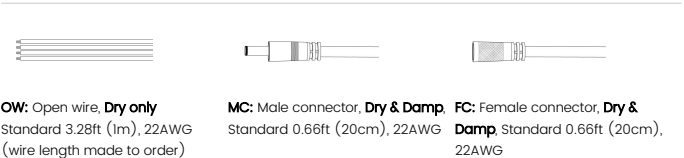

BELA TAPE RGB

Indoor · RGB

Channel Compatibility

* Non-standard option, please contact us for customization support.

Lens Type & Light Transmission

CL Clear

FR Frosted


OP Opal

Surface			
BE1201 CL 61% FR 56% OP 46% 	BE1202 CL 64% FR 58% OP 48% 	BE1215 CL 55% FR 50% OP 41% 	BE1303 CL 66% FR 60% OP 49%
BE1415 CL 55% FR 50% OP 41% 	BE1815 CL 52% FR 48% OP 39% 	BE1919 CL 76% FR 70% OP 57% 	
Mud-In			
BE5615 CL 60% FR 55% OP 45% 	BE7615 CL 72% FR 65% OP 53% 		
Recessed			
BE1207 CL 63% FR 57% OP 47% 	BE2015 CL 58% FR 53% OP 43% 	BE5035 CL 53% FR 48% OP 40% 	BE6575 CL 63% FR 58% OP 47%


BELA TAPE RGB

Indoor · RGB


Corner

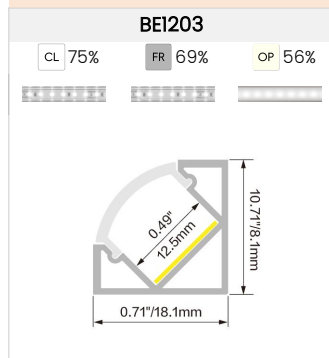

Suspended

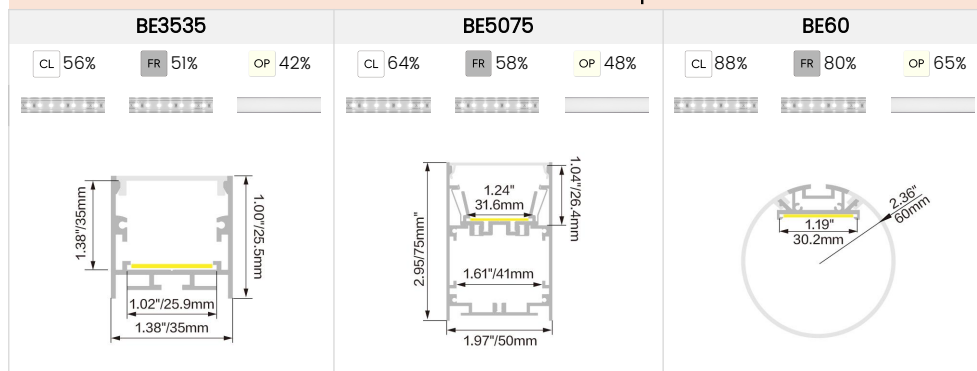

Specialty

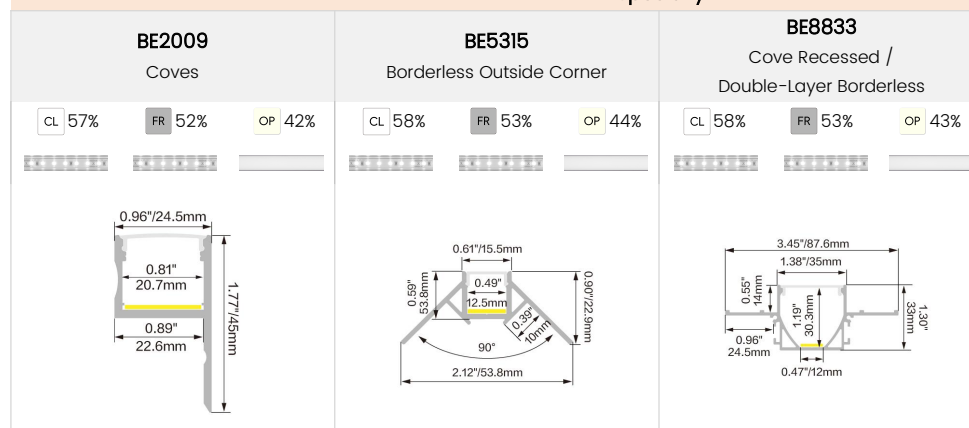

Additional Accessories (Optional, purchase for extra)



MCW-4P-67

Male connector with 0.98ft (30cm) white cable, 4 pin, IP67, Wet, 22AWG

FCW-4P-67

Female connector with 0.98ft (30cm) white cable, 4 pin, IP67, Wet, 22AWG

VHB

VHB 3M adhesive back tape, stronger stickiness

BELA TAPE RGB

Indoor -RGB

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

DMX-dimmable							
Code	Max Load	Input	Output	Class 2		Environment	Size (L *W *H)
KVX-24100-5C-A	100W	100-277VAC	24V	Yes		Dry/Damp/Wet	9.05 x 3.07 x 0.98 in. (23.0 x 7.8 x 2.5 cm)

DMX Decoders


Code	Description
LT-903	3 channels output, up to 576W output power
LT-912	12 channels output, up to 1152W output power
LT-924	24 channels output, up to 1728W output power

Controllers

Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-GA2	DMX 512 channels, ready to use (pre-loaded with 8 scenes and 170 RGB fixtures)
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram

Non-dimmable

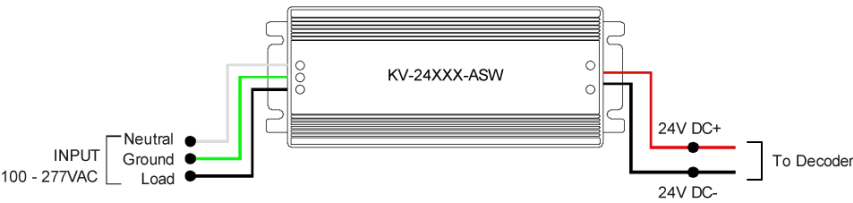

DMX-dimmable



BELA TAPE RGB

Indoor ·RGB

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total Load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20AWG	22 AWG	24 AWG
5W / 0.2A	1730 ft (527.3 m)	1090 ft (332.2 m)	680 ft (207.3 m)	430 ft (131.1 m)	270 ft (82.3 m)	170 ft (51.8 m)	107 ft (32.6 m)	68 ft (20.7 m)
10W / 0.4A	784 ft (239.0 m)	539 ft (164.3 m)	345 ft (105.2 m)	215 ft (65.5 m)	134 ft (40.8 m)	85 ft (25.9 m)	52 ft (15.8 m)	34 ft (10.4 m)
15W / 0.6A	576 ft (175.6 m)	363 ft (110.6 m)	228 ft (69.5 m)	144 ft (43.9 m)	91 ft (27.7 m)	57 ft (17.4 m)	36 ft (11.0 m)	23 ft (7.0 m)
20W / 0.8A	397 ft (121.0 m)	272 ft (82.9 m)	174 ft (53.0 m)	109 ft (33.2 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)
25W / 1.0A	346 ft (105.5 m)	218 ft (66.4 m)	137 ft (41.8 m)	86 ft (26.2 m)	55 ft (16.8 m)	34 ft (10.4 m)	22 ft (6.7 m)	14 ft (4.3 m)
30W / 1.2A	263 ft (80.2 m)	181 ft (55.2 m)	115 ft (35.1 m)	72 ft (21.9 m)	45 ft (13.7 m)	27 ft (8.2 m)	17 ft (5.2 m)	12 ft (3.7 m)
35W / 1.5A	247 ft (75.3 m)	156 ft (47.5 m)	98 ft (29.9 m)	62 ft (18.9 m)	39 ft (11.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	10 ft (3.0 m)
40W / 1.7A	197 ft (60.0 m)	135 ft (41.1 m)	86 ft (26.2 m)	54 ft (16.5 m)	33 ft (10.1 m)	21 ft (6.4 m)	13 ft (4.0 m)	9 ft (2.7 m)
45W / 1.9A	192 ft (58.5 m)	121 ft (36.9 m)	76 ft (23.2 m)	48 ft (14.6 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	8 ft (2.4 m)
50W / 2.1A	158 ft (48.2 m)	108 ft (32.9 m)	69 ft (21.0 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	10.5 ft (3.2 m)	7 ft (2.1 m)
60W / 2.5A	131 ft (39.9 m)	90 ft (27.4 m)	57 ft (17.4 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	9 ft (2.7 m)	6 ft (1.8 m)
70W / 2.9A	112 ft (34.1 m)	77 ft (23.5 m)	49 ft (14.9 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	7.5 ft (2.3 m)	5 ft (1.5 m)
80W / 3.3A	98 ft (29.9 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	11 ft (3.4 m)	6.8 ft (2.1 m)	5 ft (1.5 m)
90W / 3.8A	97 ft (29.6 m)	61 ft (18.6 m)	39 ft (11.9 m)	24 ft (7.3 m)	15 ft (4.6 m)	9 ft (2.7 m)	6 ft (1.8 m)	4 ft (1.2 m)
100W / 4.2A	82 ft (25.0 m)	56 ft (17.1 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	8 ft (2.4 m)	5.3 ft (1.6 m)	4 ft (1.2 m)