


BE7030 Extrusion

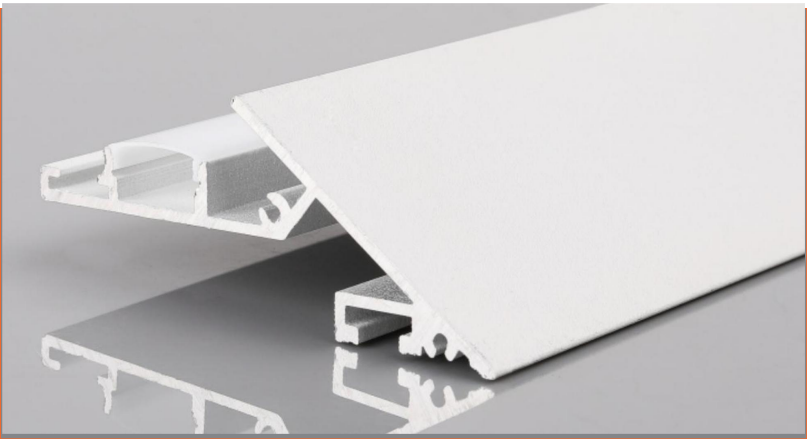


Features

- AL6063-T5 Aluminum
- Knife Edge mounting


Category

- Specialty lighting


TECHNICAL DRAWING

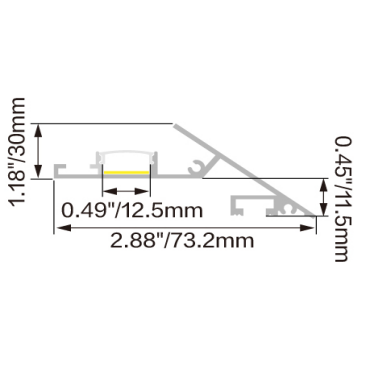

Mounting

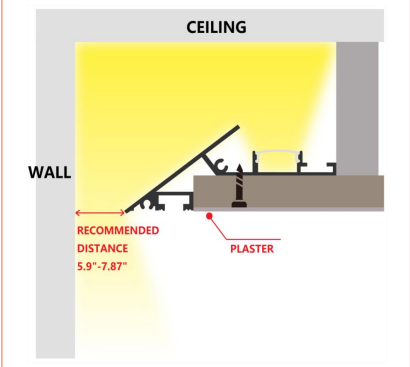

Application

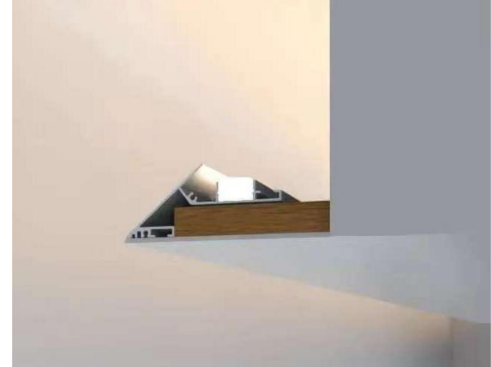

Order Code


Product	Color	Lens	Lengths
BE7030	□ W = White lacquered	OP = Opal (Light Loss 40%; CCT Shift -200K)	3.28ft = 3.28ft aluminium profile (including 3.28ft lens + 2pcs end caps + 3pcs screws) 6.56ft = 6.56ft aluminium profile (including 6.56ft lens + 2pcs end caps + 6pcs screws)

Example: BE7030-W-OP-3.28ft


Notes

*Please note that unless otherwise indicated, tape lights, extrusions and lenses will come separately and not assembled.

Installation Instruction



1. Extend 3.94" drywall from ceiling, extrude 1.97" drywall for hanging.



2. Mount BE7030 channel onto the hang with screws.




3. Install LED tape onto BE7030 channel.



4. Plaster the drywall to finish installation.

LED TAPES

HIGH EFFICACY

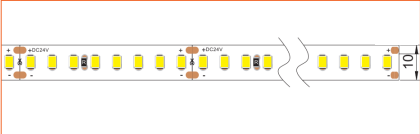


Ref: AERO TAPE HD




Ref: AERO TAPE HD IP54


WHITE

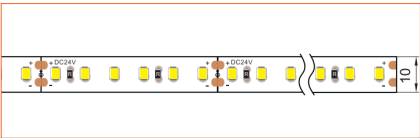


Ref: AERO TAPE

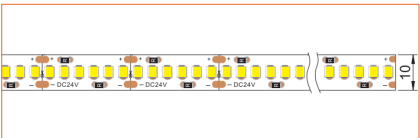


Ref: AERO TAPE HD

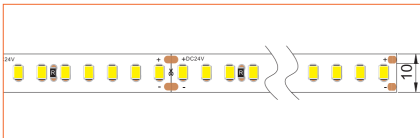

Ref: ALTA TAPE

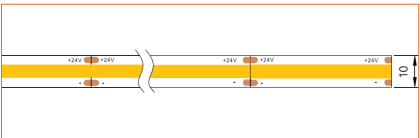


Ref: ANNO TAPE

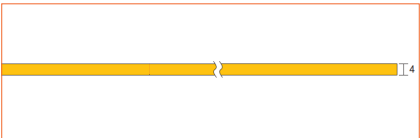


Ref: ANNO TAPE S



Ref: AERO TAPE IP54

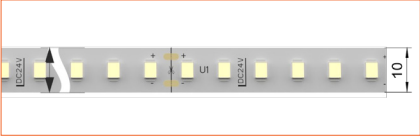

Ref: AERO TAPE CC IP20

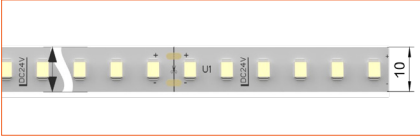


Ref: AERO TAPE CC IP65



Ref: ANNO TAPE IP54


RGB / RGBW

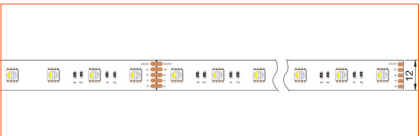


Ref: BELA TAPE RGBW



Ref: BELA TAPE RGBWW

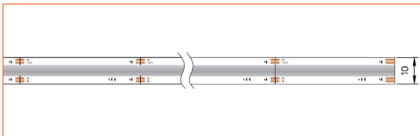


Ref: ANNO TAPE RGB

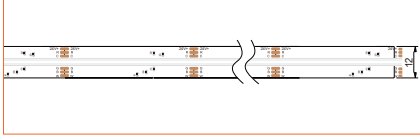


Ref: ANNO TAPE RGBWW


TUNABLE WHITE / DIM TO WARM

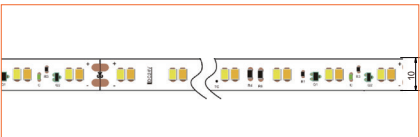

Ref: ANNO TAPE DTW

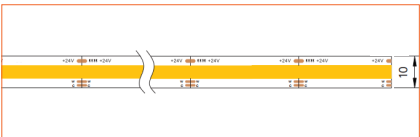

Ref: ANNO TAPE TW

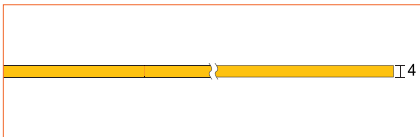

Ref: ANNO TAPE S TW



Ref: AERO TAPE TW