

LINIO NEON 360°

All-direction Bending · Static White

Features

- 360 degree emitting offers all direction views
- IP65 rated, ideal for outdoor uses
- 5 years warranty

Applications

Libraries, coffee shops, offices, lobbies, malls, studios, etc.

Date


Fixture type

Project name

Project phase



Dimensions

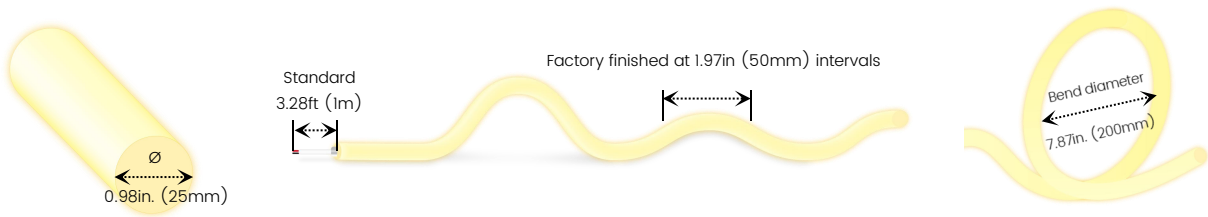

Order Code

Model	Environment	Voltage	Temp./Color	Power	End Cap	Left Feed Entry	
LN360	W5-Wet (IP65)	24-DC24V	27-2700K	152-1.52W/ft	IJ Injected (IP65)	F Front	OW Open wire 3.28ft (1m)
			30-3000K	305-3.05W/ft		S Side	MC Male connector with 0.98ft (30cm) cable
			35-3500K	457-4.57W/ft		C Closed	FC Female connector with 0.98ft (30cm) cable
			40-4000K				NA Only for Closed Feed Entry

*Injected end cap is factory-made only.

Assembly Builder

Right Feed Entry				Length	
F Front	OW	Open wire 3.28ft (1m)		Max. nominal	16.4ft (5m)
S Side	MC	Male connector with 0.98ft (30cm) cable		Increment	1.97in. (50mm)
C Closed	FC	Female connector with 0.98ft (30cm) cable		*Custom length production, cutting not recommended.	
	NA	Only for Closed Feed Entry			

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page.

Lumen Output (lm/ft)

Temp./Color	1.52W/ft	3.05W/ft	4.57W/ft
2700K	82	166	241
3000K	85	168	244
3500K	85	171	244
4000K	87	171	247
Max. Run for Class 2	16.4ft (5m)		


Technical Details

Efficacy	56.1lm/W @4000K 3.05W
CRI	Ra≥90
Beam Angle	360°
LED MacAdam	2 steps
Average Life(L70)	> 54,000 hours
Storage Temperature	-40-140°F (-40°C- 60°C)
Operating Temperature	-40-113°F (-40°C- 45°C)

LINIO NEON 360°

All-direction Bending · Static White

Photometry

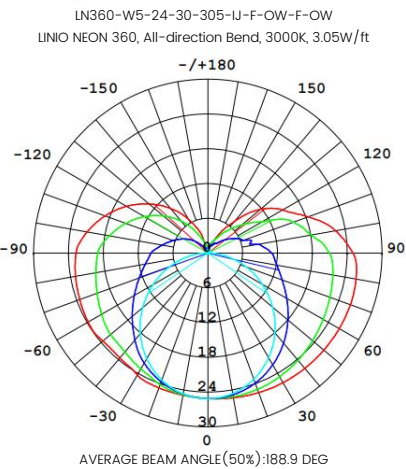

Zonal Lumen Summary RGB


Zone	Lumen	% Fixture
0-30	20.2	12.1%
0-40	34.3	20.4%
0-60	67.5	40.2%
0-90	118.1	70.3%
0-180	168.0	100%

UNIT: CD

- C0/180, 260.2
- C30/210, 237.3
- C60/240, 146.6
- C90/270, 111.2

Feed Entry / End Cap Options

IJ: Injected end cap – IP65, factory-made only

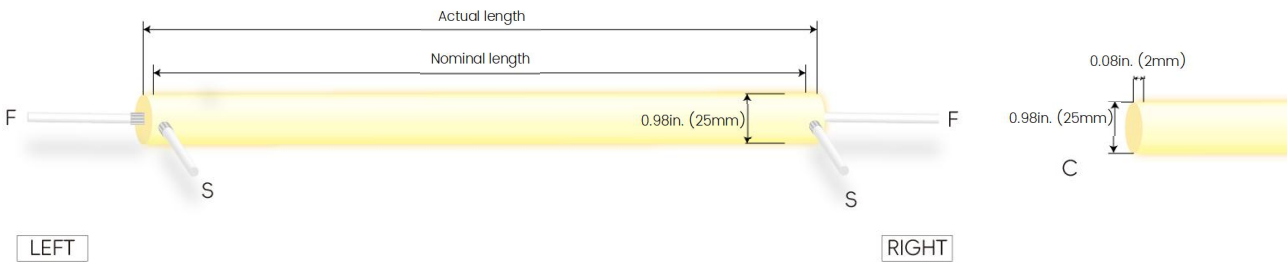

Connector Wire Options



OW: Open wire, **Dry only**

Standard 3.28ft (1m), 20 AWG (wire length customizable)



MC: Male connector, **Wet**


Standard 0.98ft (30cm), 20 AWG



FC: Female connector, **Wet**


Standard 0.98ft (30cm), 20 AWG

Mounting Options



LN360-SFC-O

Name Surface mount clear bracket-open clip



LN360-SFC-C

Name Surface mount clear bracket-closed clip











LN360-SFC-L

Name Surface mount clear bracket-low profile clip


LINIO NEON 360°

All-direction Bending · Static White


		LN360-SFC-PC NameSurface mount clear bracket-PC channel
		LN360-SPC-O NameSuspended mount clear bracket-open clip
		LN360-SPC-C NameSuspended mount clear bracket-closed clip
		LN360-SPC-PC NameSuspended mount clear bracket-PC channel
		LN360-TLC-O NameTelescoping clear bracket-open clip (Adjustable Length: 20-39")
		LN360-TLC-C NameTelescoping clear bracket-closed clip (Adjustable Length: 20-39")
		LN360-TLC-L NameTelescoping clear bracket-low profile clip (Adjustable Length: 20-39")
		LN360-TLC-PC NameTelescoping clear bracket-PC channel (Adjustable Length: 20-39")
		LN360-VB NameVertical metal flush surface mount bracket-black

LINIO NEON 360°


All-direction Bending · Static White




LN360-VSB
Name Vertical pendant suspended mount bracket-black




LN360-UB
Name U-shaped metal flush mount bracket-black




LN360-JNB-S
Name Metal joiner bracket-black (side cable entry only)



LN360-JNB-C
Name Metal joiner bracket-black (closed end cap)



LN360-JNC-S
Name Joiner bracket-clear (side cable entry only)



LN360-JNC-C
Name Joiner bracket-clear (closed end cap)

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector with 0.98ft (30cm)
white cable, 2 pin, IP67, Wet, 20 AWG



FCW-2P-67
Female connector with 0.98ft (30cm)
white cable, 2 pin, IP67, Wet, 20 AWG



MCB-2P-67
Male connector with 0.98ft (30cm)
black cable, 2 pin, IP67, Wet, 20 AWG



FCB-2P-67
Female connector with 0.98ft (30cm)
black cable, 2 pin, IP67, Wet, 20 AWG

LINIO NEON 360°

All-direction Bending · Static White

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)


5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

LINIO NEON 360°

All-direction Bending · Static White

Wiring Diagram


Non-dimmable

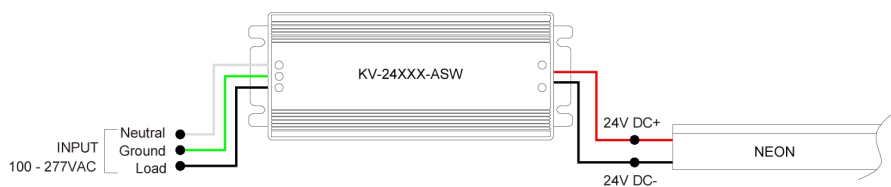


Phase cut/Triac-dimmable



4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

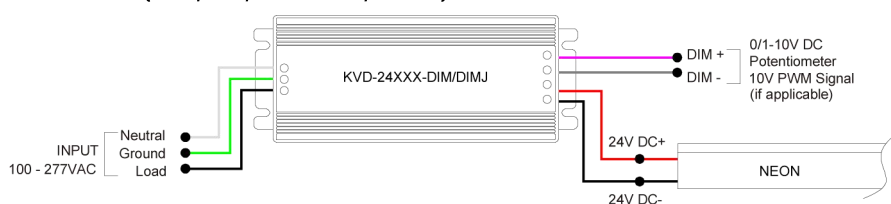

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

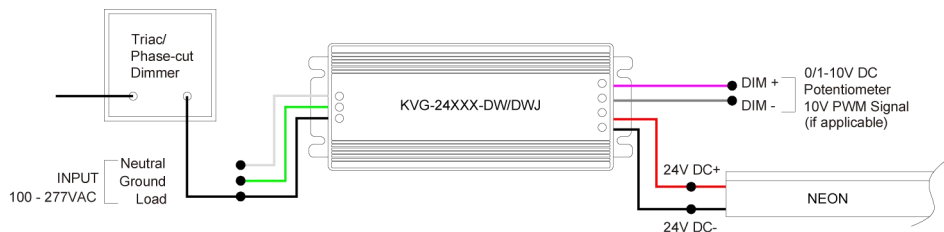

LINIO NEON 360°

All-direction Bending · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG
5W / 0.2A	1730 ft (527.3 m)	784 ft (238.9 m)	397 ft (121.0 m)	263 ft (80.2 m)	175 ft (53.3 m)	131 ft (39.9 m)	107 ft (32.6 m)
10W / 0.4A	865 ft (263.6 m)	392 ft (119.4 m)	199 ft (60.7 m)	132 ft (40.2 m)	88 ft (26.8 m)	66 ft (20.1 m)	54 ft (16.5 m)
15W / 0.6A	577 ft (175.9 m)	261 ft (79.6 m)	132 ft (40.2 m)	88 ft (26.8 m)	58 ft (17.7 m)	44 ft (13.4 m)	36 ft (11.0 m)
20W / 0.8A	433 ft (132.0 m)	196 ft (59.7 m)	99 ft (30.2 m)	66 ft (20.1 m)	44 ft (13.4 m)	33 ft (10.1 m)	27 ft (8.2 m)
25W / 1.0A	346 ft (105.5 m)	157 ft (47.9 m)	79 ft (24.1 m)	53 ft (16.2 m)	35 ft (10.7 m)	26 ft (7.9 m)	22 ft (6.7 m)
30W / 1.3A	289 ft (88.1 m)	131 ft (39.9 m)	66 ft (20.1 m)	44 ft (13.4 m)	29 ft (8.8 m)	22 ft (6.7 m)	18 ft (5.5 m)
35W / 1.5A	248 ft (75.6 m)	112 ft (34.1 m)	57 ft (17.4 m)	38 ft (11.6 m)	25 ft (7.6 m)	19 ft (5.8 m)	15 ft (4.6 m)
40W / 1.7A	217 ft (66.1 m)	98 ft (29.9 m)	50 ft (15.2 m)	33 ft (10.1 m)	22 ft (6.7 m)	16 ft (4.9 m)	13 ft (4.0 m)
45W / 1.9A	192 ft (58.5 m)	87 ft (26.5 m)	44 ft (13.4 m)	29 ft (8.8 m)	19 ft (5.8 m)	14 ft (4.3 m)	12 ft (3.7 m)
50W / 2.1A	173 ft (52.7 m)	78 ft (23.8 m)	40 ft (12.2 m)	26 ft (7.9 m)	18 ft (5.5 m)	13 ft (4.0 m)	11 ft (3.4 m)
55W / 2.3A	157 ft (47.9 m)	71 ft (21.6 m)	36 ft (11.0 m)	24 ft (7.3 m)	16 ft (4.9 m)	12 ft (3.7 m)	10 ft (3.0 m)
60W / 2.5A	144 ft (43.9 m)	65 ft (19.8 m)	33 ft (10.1 m)	22 ft (6.7 m)	15 ft (4.6 m)	11 ft (3.4 m)	9 ft (2.7 m)
65W / 2.7A	133 ft (40.5 m)	60 ft (18.3 m)	30 ft (9.1 m)	20 ft (6.1 m)	14 ft (4.3 m)	10 ft (3.0 m)	8 ft (2.4 m)
70W / 2.9A	124 ft (37.8 m)	56 ft (17.1 m)	28 ft (8.5 m)	19 ft (5.8 m)	13 ft (4.0 m)	10 ft (3.0 m)	8 ft (2.4 m)
75W / 3.1A	116 ft (35.4 m)	52 ft (15.9 m)	26 ft (7.9 m)	17 ft (5.2 m)	12 ft (3.7 m)	9 ft (2.7 m)	7 ft (2.1 m)
80W / 3.3A	109 ft (33.2 m)	49 ft (14.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	11 ft (3.4 m)	8 ft (2.4 m)	7 ft (2.1 m)
85W / 3.5A	103 ft (31.4 m)	46 ft (14.0 m)	23 ft (7.0 m)	15 ft (4.6 m)	10 ft (3.0 m)	8 ft (2.4 m)	6 ft (1.8 m)
90W / 3.8A	97 ft (29.6 m)	44 ft (13.4 m)	22 ft (6.7 m)	15 ft (4.6 m)	10 ft (3.0 m)	7 ft (2.1 m)	6 ft (1.8 m)
96W / 4.0A	91 ft (27.7 m)	41 ft (12.5 m)	21 ft (6.4 m)	14 ft (4.3 m)	9 ft (2.7 m)	7 ft (2.1 m)	6 ft (1.8 m)