

LINIO NEON 360° RGBW

All-direction Bending · RGBW

Features

- 360 degree emitting, with changeable RGBW colors
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty


Applications

Libraries, coffee shops, offices, lobbies, malls, studios, etc.

Date	Fixture type
Project name	Project phase



Dimensions

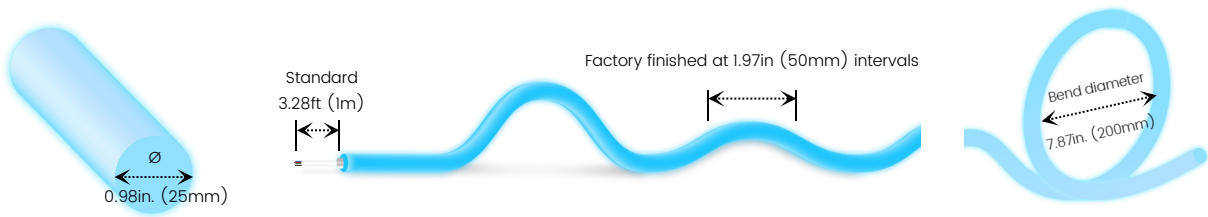

Order Code

Model	Environment	Voltage	Temp./Color	Power	End Cap	Left Feed Entry		
LN360	W5-Wet (IP65)	24-DC24V	RGBW22-RGBW (W=2200K)	488-4.88W/ft	IJ	Injected (IP65)	F Front	OW Open wire 3.28ft (1m)
			RGBW27-RGBW (W=2700K)				S Side	MC Male connector with 0.98ft (30cm) cable
			RGBW30-RGBW (W=3000K)				C Closed	FC Female connector with 0.98ft (30cm)cable
			RGBW35-RGBW (W=3500K)					NA Only for Closed Feed Entry
			RGBW40-RGBW (W=4000K)					
			RGBW45-RGBW (W=4500K)					
				*Injected end cap is factory-made only.				

*Injected end cap is factory-made only.

Assembly Builder

Assembly Builder

Right Feed Entry			Length	
F	Front	OW	Open wire 3.28ft (1m)	Max. nominal 16.4ft (5m)
S	Side	MC	Male connector with 0.98ft (30cm) cable	Increment 1.97in. (50mm)
C	Closed	FC	Female connector with 0.98ft (30cm) cable	*Custom length production, cutting not recommended.
		NA	Only for Closed Feed Entry	

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page.

LINIO NEON 360° RGBW

All-direction Bending · RGBW

Lumen Output (lm/ft)

Temp./Color	3.05W/ft
R	14
G	44
B	8
W22	45
W27	50
W30	50
W35	51
W40	51
W45	51
RGBW22	110
RGBW27	113
RGBW30	113
RGBW35	114
RGBW40	114
RGBW45	114
Max. Run for Class 2	15.7ft (4.8m)
Max. Run Supported Length	16.4ft (5m)


*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details

Efficacy	23.2lm/W @RGBW30 4.88W
CRI	Ra≥90
Beam Angle	360°
LED MacAdam	3 steps
Lumen maintenance(L80B10)	> 38,000 hours
Storage Temperature	-40~140°F (-40°C~ 60°C)
Operating Temperature	-40~113°F (-40°C~ 45°C)

Photometry

LN360-W5-24-RGBW30-488-IJ-F-OW-F-OW
LINIO NEON 360° RGBW, All-direction bend, RGBW (3000K), 4.88W/ft

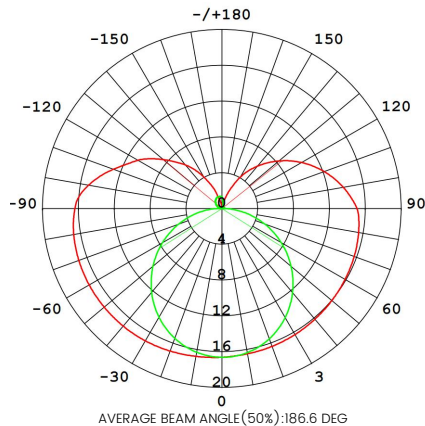


Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0~30	13.4	11.8%
0~40	22.8	20.1%
0~60	45.2	39.7%
0~90	79.2	69.5%
0~180	114	100%

UNIT: CD
— C0/180, 258.4
— C90/270, 114.8

Feed Entry / End Cap Options

IJ: Injected end cap – IP65, factory-made only

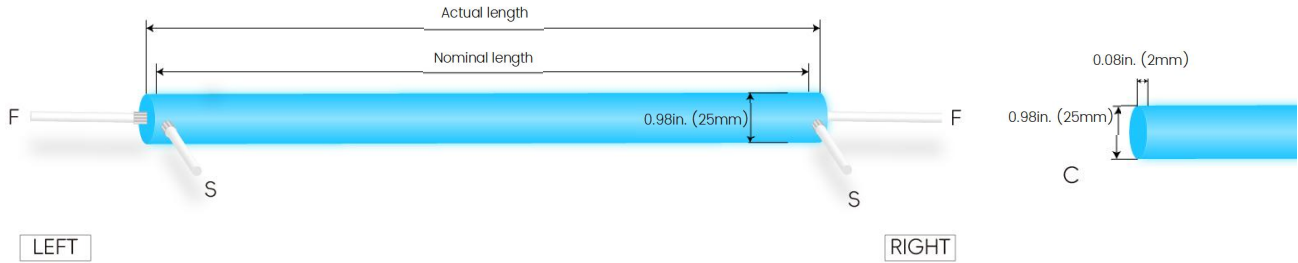

Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG (wire length customizable)



MC: Male connector, **Wet**
Standard 0.98ft (30cm), 20 AWG












FC: Female connector, **Wet**
Standard 0.98ft (30cm), 20 AWG

LINIO NEON 360° RGBW


All-direction Bending · RGBW

Mounting Options


		LN360-SFC-O NameSurface mount clear bracket-open clip
		LN360-SFC-C NameSurface mount clear bracket-closed clip
		LN360-SFC-L NameSurface mount clear bracket-low profile clip
		LN360-SFC-PC NameSurface mount clear bracket-PC channel
		LN360-SPC-O NameSuspended mount clear bracket-open clip
		LN360-SPC-C NameSuspended mount clear bracket-closed clip
		LN360-SPC-PC NameSuspended mount clear bracket-PC channel
		LN360-TLC-O NameTelescoping clear bracket-open clip (Adjustable Length: 20-39")
		LN360-TLC-C NameTelescoping clear bracket-closed clip (Adjustable Length: 20-39")

LINIO NEON 360° RGBW


All-direction Bending · RGBW




LN360-TLC-L	
Name	Telescoping clear bracket-low profile clip (Adjustable Length: 20-39")




LN360-TLC-PC	
Name	Telescoping clear bracket-PC channel (Adjustable Length: 20-39")




LN360-VB	
Name	Vertical metal flush surface mount bracket-black




LN360-VSB	
Name	Vertical pendant suspended mount bracket-black




LN360-UB	
Name	U-shaped metal flush mount bracket-black




LN360-JNB-S	
Name	Metal joiner bracket-black (side cable entry only)



LN360-JNB-C	
Name	Metal joiner bracket-black (closed end cap)



LN360-JNC-S	
Name	Joiner bracket-clear (side cable entry only)



LN360-JNC-C	
Name	Joiner bracket-clear (closed end cap)

LINIO NEON 360° RGBW

All-direction Bending · RGBW

Additional Accessories (Optional, purchase for extra)



MCW-5P-67
Male connector with 0.98ft (30cm)
white cable, 5 pin, IP67, Wet, 20 AWG



FCW-5P-67
Female connector with 0.98ft (30cm)
white cable, 5 pin, IP67, Wet, 20 AWG



MCB-5P-67
Male connector with 0.98ft (30cm)
black cable, 5 pin, IP67, Wet, 20 AWG



FCB-5P-67
Female connector with 0.98ft (30cm)
black cable, 5 pin, IP67, Wet, 20 AWG

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.9in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

DMX-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVX-24100-4C-A	100W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.05 x 3.07 x 0.98in. (230 x 78x 25cm)
KVX-24150-4C-A	150W						10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24200-4C-A	200W			No			10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24300-4C-A	300W						11.85 x 3.07 x 0.98in. (301 x 78x 25cm)

DMX Decoders


Code	Description
LT-904	4 channels output, up to 576W output power
LT-916	16 channels output, up to 1152W output power
LT-932	32 channels output, up to 1728W output power

Controllers


Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-GA2	DMX 512 channels, ready to use (pre-loaded with 8 scenes and 170 RGB fixtures)
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram

Non-dimmable

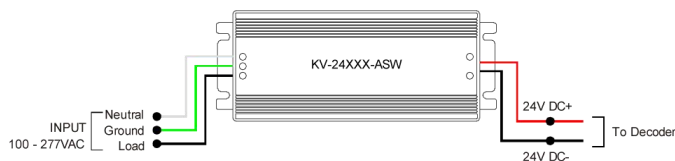

DMX-dimmable

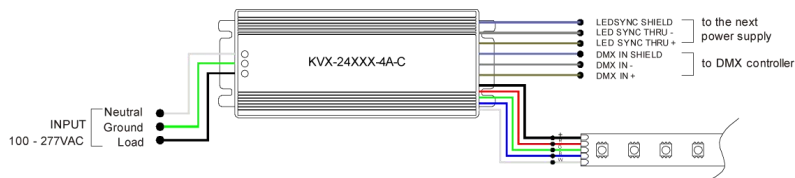

LINIO NEON 360° RGBW

All-direction Bending · RGBW

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG
5W / 0.2A	1730 ft (527.3 m)	784 ft (238.9 m)	397 ft (121.0 m)	263 ft (80.2 m)	175 ft (53.3 m)	131 ft (39.9 m)	107 ft (32.6 m)
10W / 0.4A	865 ft (263.6 m)	392 ft (119.4 m)	199 ft (60.7 m)	132 ft (40.2 m)	88 ft (26.8 m)	66 ft (20.1 m)	54 ft (16.5 m)
15W / 0.6A	577 ft (175.9 m)	261 ft (79.6 m)	132 ft (40.2 m)	88 ft (26.8 m)	58 ft (17.7 m)	44 ft (13.4 m)	36 ft (11.0 m)
20W / 0.8A	433 ft (132.0 m)	196 ft (59.7 m)	99 ft (30.2 m)	66 ft (20.1 m)	44 ft (13.4 m)	33 ft (10.1 m)	27 ft (8.2 m)
25W / 1.0A	346 ft (105.5 m)	157 ft (47.9 m)	79 ft (24.1 m)	53 ft (16.2 m)	35 ft (10.7 m)	26 ft (7.9 m)	22 ft (6.7 m)
30W / 1.3A	289 ft (88.1 m)	131 ft (39.9 m)	66 ft (20.1 m)	44 ft (13.4 m)	29 ft (8.8 m)	22 ft (6.7 m)	18 ft (5.5 m)
35W / 1.5A	248 ft (75.6 m)	112 ft (34.1 m)	57 ft (17.4 m)	38 ft (11.6 m)	25 ft (7.6 m)	19 ft (5.8 m)	15 ft (4.6 m)
40W / 1.7A	217 ft (66.1 m)	98 ft (29.9 m)	50 ft (15.2 m)	33 ft (10.1 m)	22 ft (6.7 m)	16 ft (4.9 m)	13 ft (4.0 m)
45W / 1.9A	192 ft (58.5 m)	87 ft (26.5 m)	44 ft (13.4 m)	29 ft (8.8 m)	19 ft (5.8 m)	14 ft (4.3 m)	12 ft (3.7 m)
50W / 2.1A	173 ft (52.7 m)	78 ft (23.8 m)	40 ft (12.2 m)	26 ft (7.9 m)	18 ft (5.5 m)	13 ft (4.0 m)	11 ft (3.4 m)
55W / 2.3A	157 ft (47.9 m)	71 ft (21.6 m)	36 ft (11.0 m)	24 ft (7.3 m)	16 ft (4.9 m)	12 ft (3.7 m)	10 ft (3.0 m)
60W / 2.5A	144 ft (43.9 m)	65 ft (19.8 m)	33 ft (10.1 m)	22 ft (6.7 m)	15 ft (4.6 m)	11 ft (3.4 m)	9 ft (2.7 m)
65W / 2.7A	133 ft (40.5 m)	60 ft (18.3 m)	30 ft (9.1 m)	20 ft (6.1 m)	14 ft (4.3 m)	10 ft (3.0 m)	8 ft (2.4 m)
70W / 2.9A	124 ft (37.8 m)	56 ft (17.1 m)	28 ft (8.5 m)	19 ft (5.8 m)	13 ft (4.0 m)	10 ft (3.0 m)	8 ft (2.4 m)
75W / 3.1A	116 ft (35.4 m)	52 ft (15.9 m)	26 ft (7.9 m)	17 ft (5.2 m)	12 ft (3.7 m)	9 ft (2.7 m)	7 ft (2.1 m)
80W / 3.3A	109 ft (33.2 m)	49 ft (14.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	11 ft (3.4 m)	8 ft (2.4 m)	7 ft (2.1 m)
85W / 3.5A	103 ft (31.4 m)	46 ft (14.0 m)	23 ft (7.0 m)	15 ft (4.6 m)	10 ft (3.0 m)	8 ft (2.4 m)	6 ft (1.8 m)
90W / 3.8A	97 ft (29.6 m)	44 ft (13.4 m)	22 ft (6.7 m)	15 ft (4.6 m)	10 ft (3.0 m)	7 ft (2.1 m)	6 ft (1.8 m)
96W / 4.0A	91 ft (27.7 m)	41 ft (12.5 m)	21 ft (6.4 m)	14 ft (4.3 m)	9 ft (2.7 m)	7 ft (2.1 m)	6 ft (1.8 m)