

BELA TAPE COLORS

Indoor · Static White

Features

- Standard & popular SMD tape, with various monochromatic color options
- IP20 rated, ideal for indoor uses
- 5 years warranty

Applications

Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.



Dimensions



Order Code (For LED tape)

Series	Environment	Voltage	Temp./Color	Power
BELA	D2-Dry (IP20)	24-DC24V	R-Red G-Green B-Blue A-Amber Y-Yellow	305~3.05W/ft

Assembly Builder

Left Feed Entry			
F	Front	OW	Open wire 3.28ft (1m), 20 AWG
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG
		FC	Female connector with 0.66ft (20cm) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			Illuminated Length ¹
F	Front	OW	Open wire 3.28ft (1m), 20 AWG
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG
		FC	Female connector with 0.66ft (20cm) cable, 20 AWG
		NA	Only for Closed Feed Entry

1. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap).

Channel Order Code

Product Code ¹	Colors	Lens	Lengths
Please select on the Channel Compatibility page	S = Silver anodized W = White lacquered B = Black anodized	OP - Opal FR - Frosted CL - Clear	3.28ft (1m) 6.56ft (2m)

1. Including 3.28ft/6.56ft lens cover + 2pcs end caps+2pcs mounting clips.

Lumen Output (lm/ft)

Temp./Color	3.05W/ft
Red (620-625nm)	107
Green (524nm±2)	310
Blue (465-470nm)	76
Amber (600-605nm)	102
Yellow (588nm±2)	66
Max. Run for Class 2*	25.2ft (7.7m)
Max. Run Supported Length	23ft (7m)

*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details	
Width	0.31in. (8mm)
LED Quantity	36 LEDs/ft (120 LEDs/m)
Beam Angle	120°
Efficacy	35.lm/W @Red 3.05W
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	164ft (50m)
Storage Temperature	-4-113°F (-20°C- 60°C)
Ambient Temperature	-13-140°F (-20°C- 45°C)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options

OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG
(wire length made to order)

MC: Male connector, **Dry & Damp.** FC: Female connector, **Dry & Damp.**
Standard 0.66ft (20cm), 20 AWG
Standard 0.66ft (20cm), 20 AWG

BELA TAPE COLORS

Indoor · Static White

Channel Compatibility

Lens Type & Light Transmission

* Non-standard option, please contact us for customization support.

CL Clear FR Frosted OP Opal

Surface		
BE1201 CL 59%FR 54%OP 44%	BE1202 CL 60%FR 55%OP 45%	BE1205 CL 81%FR 73%OP 60%
Mud-In		
BE5615 CL 56%FR 51%OP 42%	BE7615 CL 68%FR 62%OP 51%	
Recessed		
BE1204 CL 81%FR 74%OP 60%	BE5035 CL 50%FR 46%OP 38%	BE6575 CL 61%FR 56%OP 45%

BELA TAPE COLORS

Indoor · Static White

Corner		
BE1002 CL 83%FR 76%OP 62%	BE1203 CL 81%FR 74%OP 60%	
Suspended		
BE3535 CL 53%FR 48%OP 39%	BE5075 CL 61%FR 55%OP 45%	BE60 CL 86%FR 79%OP 64%
Specialty		
BE6728 Staircase CL 50%FR 46%OP 37%		

Connectors & Additional Accessories (Optional, purchase for extra)

N60CO-STCN-2P-8 Strip to cable connector without wire, for 0.3lin. (8mm) tape, 2 pin	N60CO-STC-2P-8 Strip to cable connector with 5.9lin. (15cm) wire, for 0.3lin. (8mm) tape, 2 pin	N60CO-STSJ-2P-8 Strip to strip jumper connector with 5.9lin. (15cm) wire, for 0.3lin. (8mm) tape, 2 pin	N60CO-STDCB-2P-8 Strip to cable with black male & female connector, for 0.3lin. (8mm) tape, 2 pin	N60CO-STDCW-2P-8 Strip to cable with white male & female connector, for 0.3lin. (8mm) tape, 2 pin

BELA TAPE COLORS

Indoor · Static White



MCB-DC-44
Male DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG



FCB-DC-44
Female DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

BELA TAPE COLORS

Indoor · Static White

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

Wiring Diagram


Non-dimmable




Phase cut/Triac-dimmable

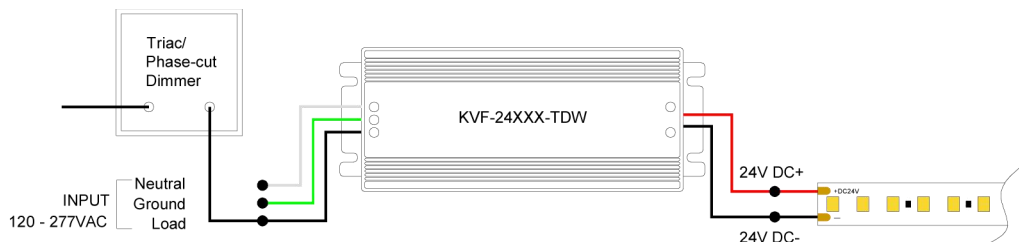

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

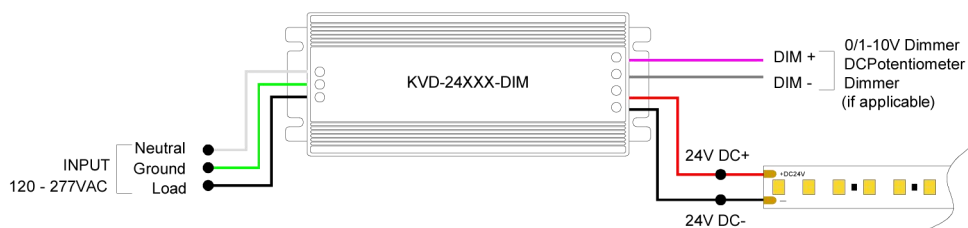

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

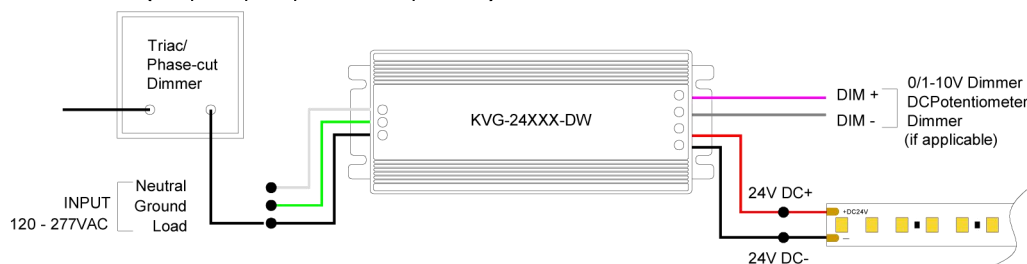

BELA TAPE COLORS

Indoor · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total Load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5W / 0.2A	1730 ft (527.3 m)	1090 ft (332.2 m)	680 ft (207.3 m)	430 ft (131.1 m)	270 ft (82.3 m)	170 ft (51.8 m)	107 ft (32.6 m)	68 ft (20.7 m)
10W / 0.4A	784 ft (239.0 m)	539 ft (164.3 m)	345 ft (105.2 m)	215 ft (65.5 m)	134 ft (40.8 m)	85 ft (25.9 m)	52 ft (15.8 m)	34 ft (10.4 m)
15W / 0.6A	576 ft (175.6 m)	363 ft (110.6 m)	228 ft (69.5 m)	144 ft (43.9 m)	91 ft (27.7 m)	57 ft (17.4 m)	36 ft (11.0 m)	23 ft (7.0 m)
20W / 0.8A	397 ft (121.0 m)	272 ft (82.9 m)	174 ft (53.0 m)	109 ft (33.2 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)
25W / 1.0A	346 ft (105.5 m)	218 ft (66.4 m)	137 ft (41.8 m)	86 ft (26.2 m)	55 ft (16.8 m)	34 ft (10.4 m)	22 ft (6.7 m)	14 ft (4.3 m)
30W / 1.2A	263 ft (80.2 m)	181 ft (55.2 m)	115 ft (35.1 m)	72 ft (21.9 m)	45 ft (13.7 m)	27 ft (8.2 m)	17 ft (5.2 m)	12 ft (3.7 m)
35W / 1.5A	247 ft (75.3 m)	156 ft (47.5 m)	98 ft (29.9 m)	62 ft (18.9 m)	39 ft (11.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	10 ft (3.0 m)
40W / 1.7A	197 ft (60.0 m)	135 ft (41.1 m)	86 ft (26.2 m)	54 ft (16.5 m)	33 ft (10.1 m)	21 ft (6.4 m)	13 ft (4.0 m)	9 ft (2.7 m)
45W / 1.9A	192 ft (58.5 m)	121 ft (36.9 m)	76 ft (23.2 m)	48 ft (14.6 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	8 ft (2.4 m)
50W / 2.1A	158 ft (48.2 m)	108 ft (32.9 m)	69 ft (21.0 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	10.5 ft (3.2 m)	7 ft (2.1 m)
60W / 2.5A	131 ft (39.9 m)	90 ft (27.4 m)	57 ft (17.4 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	9 ft (2.7 m)	6 ft (1.8 m)
70W / 2.9A	112 ft (34.1 m)	77 ft (23.5 m)	49 ft (14.9 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	7.5 ft (2.3 m)	5 ft (1.5 m)
80W / 3.3A	98 ft (29.9 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	11 ft (3.4 m)	6.8 ft (2.1 m)	5 ft (1.5 m)
90W / 3.8A	97 ft (29.6 m)	61 ft (18.6 m)	39 ft (11.9 m)	24 ft (7.3 m)	15 ft (4.6 m)	9 ft (2.7 m)	6 ft (1.8 m)	4 ft (1.2 m)
100W / 4.2A	82 ft (25.0 m)	56 ft (17.1 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	8 ft (2.4 m)	5.3 ft (1.6 m)	4 ft (1.2 m)