

BELA TAPE RGB

Indoor ·RGB

Features


- 3 colors in 1 diode SMD tape, with changeable RGB colors
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications

Under cabinets, coves, theme parks, bedrooms, studios, etc.



Dimensions

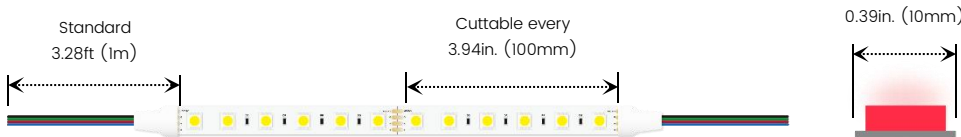

Order Code (For LED tape)

Series	Environment	Voltage	Temp./Color	Power
BELA	D2-Dry (IP20)	24V-DC24V	RGB-RGB	4.4-4.39W/ft

Assembly Builder

Left Feed Entry			
F	Front	OW	Open wire 3.28ft (1m), 22 AWG
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 22 AWG
		FC	Female connector with 0.66ft (20cm) cable, 22 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

Right Feed Entry			Length
F	Front	OW	Open wire 3.28ft (1m), 22AWG
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 22AWG
		FC	Female connector with 0.66ft (20cm) cable, 22AWG
		NA	Only for Closed Feed Entry
			Max. 16.4ft (5m)
			Increment 3.94in.(100mm)

*For customizations, please inquire.

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	S = Silver anodized	OP - Opal	3.28ft (1m)
	W = White lacquered	FR - Frosted	6.56ft (2m)
	B = Black anodized	CL - Clear	

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/ft)

Temp./Color	4.39W/ft
R	32
G	128
B	24
RGB	176
Max. Run for Class 2*	18.2ft (5.5m)
Max. Run Supported Length	19.7ft (6m)

*Typically installations in USA and Canada comply with Class 2 requirements.


Technical Details

Width	0.39in. (10mm)
LED Quantity	18 LEDs/ft (60 LEDs/M)
Beam Angle	120°
Efficacy	40.1lm/W @RGB 4.39W
Average Life (L70)	> 30,000 hours
Max. Length Per Reel	164ft (50m)
Storage Temperature	-13-140°F (-25°C- 60°C)
Ambient Temperature	-13-113°F (-25°C- 45°C)

Feed Entry Options



Connector Wire Options

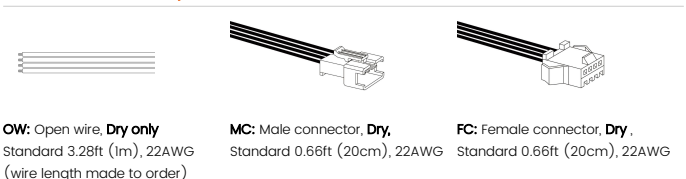

BELA TAPE RGB

Indoor ·RGB

Channel Compatibility

Lens Type & Light Transmission

* Non-standard option, please contact us for customization support.

CL Clear FR Frosted OP Opal

Surface			
BEI202 CL 64%FR 58%OP 48%	BEI215 CL 55%FR 50%OP 41%	BEI303 CL 66%FR 60%OP 49%	BEI415 CL 55%FR 50%OP 41%
BEI919 CL 76%FR 70%OP 57%			
Mud-In			
BE5615 CL 60%FR 55%OP 45%	BE7615 CL 72%FR 65%OP 53%		

BELA TAPE RGB

Indoor · RGB

Recessed

BE1201 CL 61% FR 56% OP 46%	BE1207 CL 63% FR 57% OP 47%	BE1815 CL 52% FR 48% OP 39%	BE2015 CL 58% FR 53% OP 43%
BE5035 CL 53% FR 48% OP 40%	BE6575 CL 63% FR 58% OP 47%		

Corner




BE1203 CL 75% FR 69% OP 56%
--

Suspended

BE3535 CL 56% FR 51% OP 42%	BE5075 CL 64% FR 58% OP 48%	BE60 CL 88% FR 80% OP 65%
--	--	--

BELA TAPE RGB

Indoor ·RGB

Specialty		
BE2009 Coves CL 57%FR 52%OP 42% 	BE5315 Borderless Outside Corner CL 58%FR 53%OP 44% 	BE8833 Cove Recessed / Double-Layer Borderless CL 58%FR 53%OP 43% 

Additional Accessories (Optional, purchase for extra)



N6012-STCN-4P-10

Strip to cable connector without wire, for 0.39in. (10mm) tape, 4 pin, IP20



N6012-STC-4P-10

Strip to strip connector, for 0.39in. (10mm) tape, 4 pin, IP20



N6012-STSJ-4P-10

Strip to cable connector with 5.9in. (15cm) wire, for 0.39in. (10mm) tape, 4 pin, IP20



N6012-STC-4P-10

Strip to cable connector with 5.9in. (15cm) wire, for 0.39in. (10mm) tape, 4 pin, IP20



C6012-LC-4P-10

L-shaped corner connector, for 0.39in. (10mm) tape, 4 pin, IP20



C6012-RC-4P-10

R-shaped corner connector, for 0.39in. (10mm) tape, 4 pin, IP20



MC-4P-20

Male SM connector with 0.66ft (20cm) cable, 4pin, IP20, Dry, 22AWG



FC-4P-20

Female SM connector with 0.66ft (20cm) cable, 4pin, IP20, Dry, 22AWG

BELA TAPE RGB

Indoor ·RGB

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

DMX-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVX-24100-3C-A	100W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.05 x 3.07 x 0.98in. (230 x 78x 25cm)
KVX-24150-3C-A	150W						10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24200-3C-A	200W			No			10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24300-3C-A	300W						11.85 x 3.07 x 0.98in. (301 x 78x 25cm)

DMX Decoders


Code	Description
LT-903	3 channels output, up to 576W output power
LT-912	12 channels output, up to 1152W output power
LT-924	24 channels output, up to 1728W output power

Controllers

Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram

Non-dimmable driver

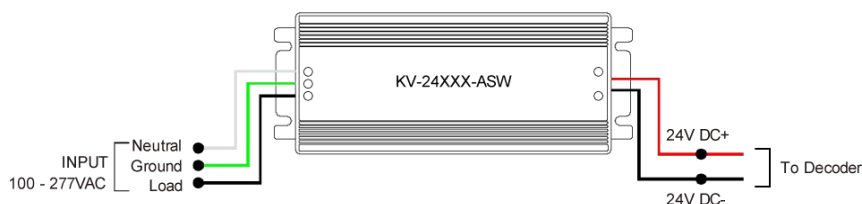

DMX-dimmable driver



BELA TAPE RGB

Indoor · RGB

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)