

BELA TAPE RGBW

Indoor · RGBW

Features


- 4 colors in 1 diode SMD tape, with changeable RGBW colors
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications

Under cabinets, coves, theme parks, bedrooms, studios, etc.



Dimensions

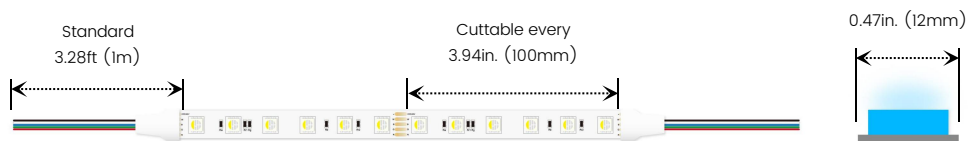

Order Code (For LED tape)

Series	Environment	Voltage	Temp./Color	Power	Left Feed Entry			
BELA	D2-Dry (IP20)	24V-DC24V	RGBW30K-RGBW(W=3000K)	4.4-4.39W/ft	F	Front	OW	Open wire 3.28ft (1m), 22 AWG
					C	Closed	MC	Male connector with 0.66ft (20cm) cable, 22 AWG
							FC	Female connector with 0.66ft (20cm) cable, 22 AWG
							NA	Only for Closed Feed Entry

Assembly Builder

Assembly Builder

Right Feed Entry			Length
F	Front	OW	Open wire 3.28ft (1m), 22 AWG
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 22 AWG
		FC	Female connector with 0.66ft (20cm) cable, 22 AWG
		NA	Only for Closed Feed Entry
			Max. 16.4ft (5m)
			Increment 3.94in.(100mm)

*For customizations, please inquire.

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	S = Silver anodized W = White lacquered B = Black anodized	OP - Opal FR - Frosted CL - Clear	3.28ft (1m) 6.56ft (2m)

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/ft)

Temp./Color	4.39W/ft
R	30
G	75
B	21
W30	69
RGBW30	186
Max. Run for Class 2*	16.4ft (5m)
Max. Run Supported Length	16.4ft (5m)

Technical Details

Width	0.47in. (12mm)
LED Quantity	18 LEDs/ft (60 LEDs/M)
Beam Angle	120°
Efficacy	42.4lm/W @RGBW30 4.39W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Average Life (L70)	> 30,000 hours
Max. Length Per Reel	164ft (50m)
Storage Temperature	-13-140°F (-25°C-60°C)
Ambient Temperature	-13-113°F (-25°C-45°C)

Feed Entry Options

F: Front




C: Closed




Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 22 AWG
(wire length made to order)



MC: Male connector, **Dry**,
Standard 0.66ft (20cm), 22 AWG



FC: Female connector, **Dry**,
Standard 0.66ft (20cm), 22 AWG

BELA TAPE RGBW

Indoor · RGBW

Channel Compatibility

* Non-standard option, please contact us for customization support.

Lens Type & Light Transmission


CL Clear FR Frosted OP Opal

Surface			
BE1202 CL 63%FR 58%OP 47%	BE1303 CL 65%FR 59%OP 48%	BE1919 CL 76%FR 69%OP 57%	BE2020 CL 80%FR 73%OP 60%
Mud-In			
BE5615 CL 59%FR 53%OP 44%	BE7615 CL 70%FR 64%OP 52%		
Recessed			
BE1201 CL 62%FR 57%OP 46%	BE1207 CL 62%FR 57%OP 47%	BE5035 CL 51%FR 47%OP 38%	BE6575 CL 64%FR 58%OP 48%




BELA TAPE RGBW

Indoor · RGBW




Corner

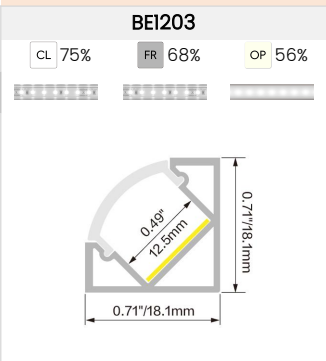

Suspended

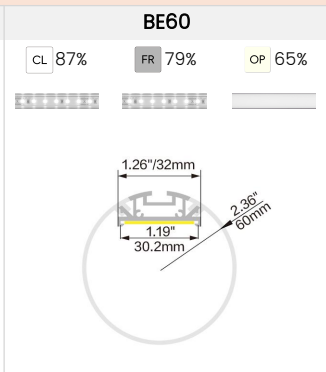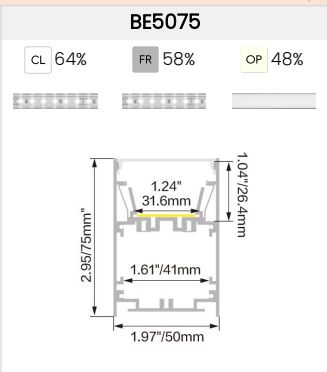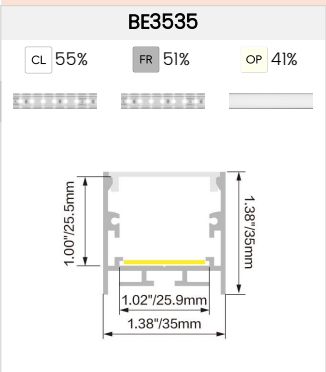

Specialty

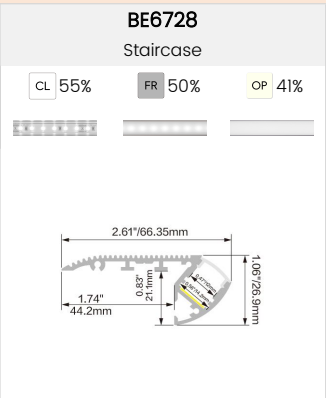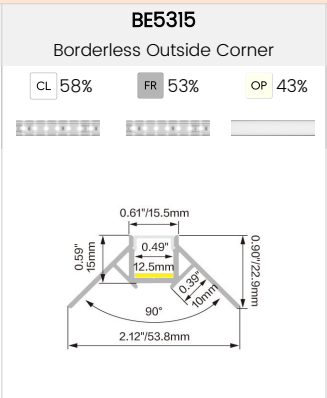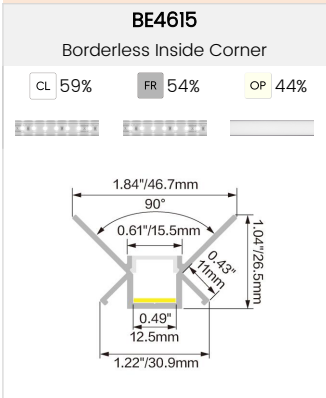

BELA TAPE RGBW

Indoor · RGBW

Additional Accessories (Optional, purchase for extra)



N6012-STCN-5P-12
Strip to cable connector without wire, for 0.47in. (12mm) tape, 5 pin, IP20



N6012-STTS-5P-12
Strip to strip connector, for 0.47in. (12mm) tape, 5 pin, IP20



N6012-STC-5P-12
Strip to cable connector with 5.9lin. (15cm) wire, for 0.47in. (12mm) tape, 5 pin, IP20



N6012-STSJ-5P-12
Strip to strip jumper connector with 5.9lin. (15cm) wire, for 0.47in. (12mm) tape, 5 pin, IP20



C6012-LC-5P-12
L-shaped corner connector, for 0.47in. (12mm) tape, 5 pin, IP20



C6012-RC-5P-12
R-shaped corner connector, for 0.47in. (12mm) tape, 5 pin, IP20



MC-5P-20
Male SM connector with 0.66ft (20cm) cable, 5pin, IP20, Dry, 22AWG



FC-5P-20
Female SM connector with 0.66ft (20cm) cable, 5pin, IP20, Dry, 22AWG

BELA TAPE RGBW

Indoor · RGBW

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

DMX-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVX-24100-4C-A	100W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.05 x 3.07 x 0.98in. (230 x 78x 25cm)
KVX-24150-4C-A	150W						10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24200-4C-A	200W			No			10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24300-4C-A	300W						11.85 x 3.07 x 0.98in. (301 x 78x 25cm)

DMX Decoders


Code	Description
LT-904	4 channels output, up to 576W output power
LT-916	16 channels output, up to 1152W output power
LT-932	32 channels output, up to 1728W output power

Controllers


Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram

Non-dimmable driver

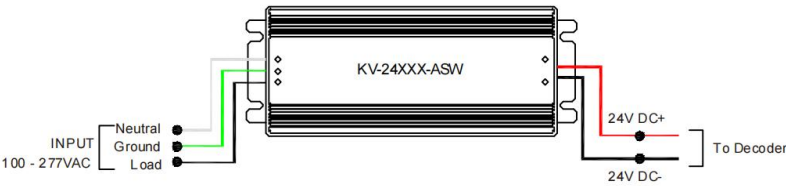

DMX-dimmable driver

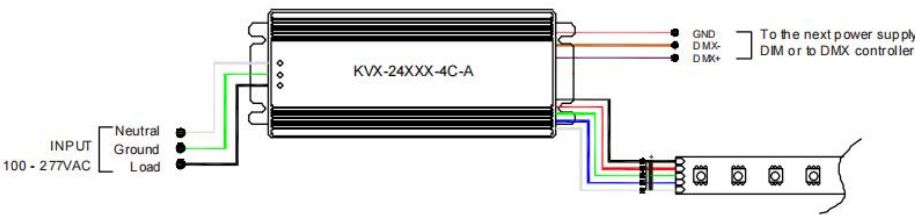

BELA TAPE RGBW

Indoor · RGBW

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)