

ANNO TAPE PRO RGBWW

Indoor -RGBWW

Features


- High-density diode-free CSP tape, with changeable RGBWW colors
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications

Under cabinets, coves, theme parks, bedrooms, studios, etc.



Dimensions

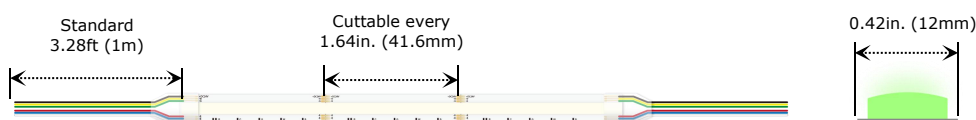

Order Code (For LED tape)

Series	Environment	Voltage	Temp./Color	Power
ANNO P	D2-Dry (IP20)	24V-DC24	RGBWW27K65K-RGBWW(WW=2700K+6500K)	4.9-4.88W/ft

Assembly Builder

Left Feed Entry		
F	Front	OW
C	Closed	MC
		FC
		NA

Assembly Builder

Right Feed Entry		Length
F	Front	OW
C	Closed	MC
		FC
		NA

*For customizations, please inquire.

Extrusion Order Code

Product Code	Colors	Lens	Lengths
S	Silver anodized	OP	Opal
W	White lacquered	FR	Frosted
B	Black anodized	CL	Clear

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/ft)

Temp./Color	4.88W/ft
R	32
G	73
B	15
W27	69
W65	70
RGBWW2765	238
Max. Run for Class 2*	16.4ft (5m)
Max. Run Supported Length	16.4ft (5m)

*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details

Width	0.42in. (12mm)
LED Quantity	256 LEDs/ft (840 LEDs/M)
Beam Angle	120°
Efficacy	48.8lm/W @RGBWW2765 4.88W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Average Life (L70)	> 30,000 hours
Max. Length Per Reel	164ft (50m)
Storage Temperature	-13~140°F (-25°C~60°C)
Ambient Temperature	-4~113°F (-20°C~45°C)

Feed Entry Options



F: Front



C: Closed



Connector Wire Options

OW: Open wire, Dry only
Standard 3.28ft (1m), 22 AWG
(wire length made to order)MC: Male connector, Dry
Standard 0.66ft (20cm), 22 AWGFC: Female connector, Dry
Standard 0.66ft (20cm), 22 AWG

Channel Compatibility

* Non-standard option, please contact us for customization support.

Lens Type & Light Transmission

CL	Clear	FR	Frosted	OP	Opal
----	-------	----	---------	----	------

Surface					
BE1202			BE1206		
CL	57%	FR	52%	OP	43%
CL	74%	FR	67%	OP	55%
BE1302			BE1910		
CL	77%	FR	70%	OP	57%
CL	70%	FR	64%	OP	52%


BE1919 CL 70% FR 64% OP 52%	BE2020 CL 73% FR 66% OP 54%	BE2601 CL 78% FR 72% OP 59%	

Mud-In


BE5615 CL 55% FR 50% OP 41%	BE7615 CL 66% FR 60% OP 49%

Recessed



BE1201 CL 56% FR 51% OP 42%	BE1207 CL 56% FR 51% OP 42%	BE2810 CL 73% FR 67% OP 54%	BE5035 CL 48% FR 44% OP 36%
BE6575			











Corner

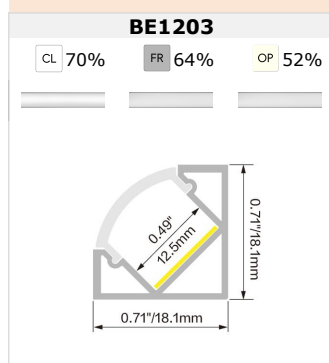


Suspended

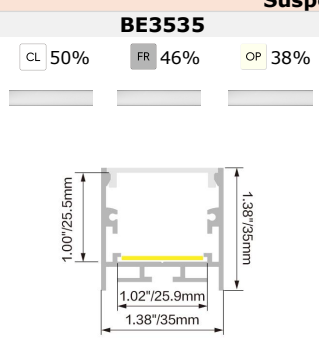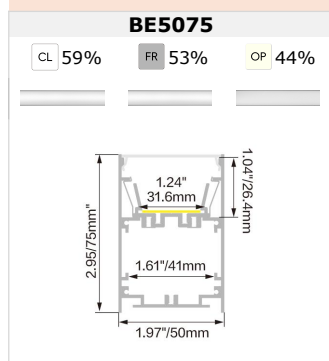

Specialty

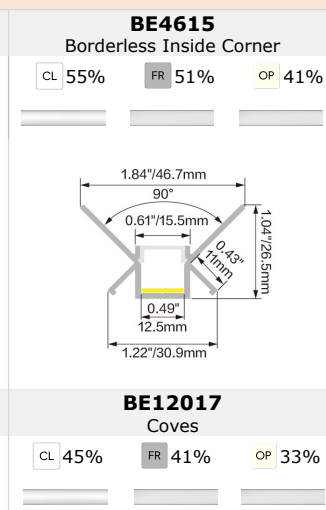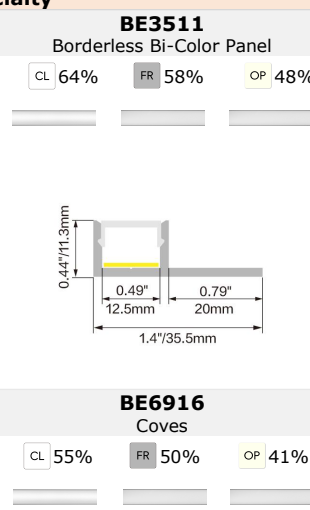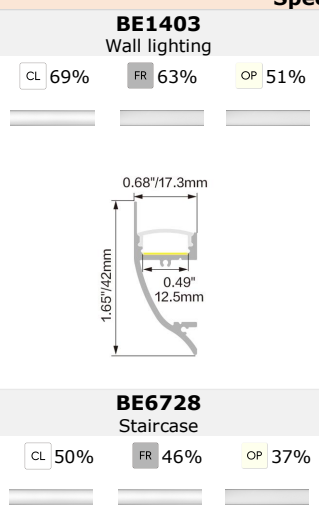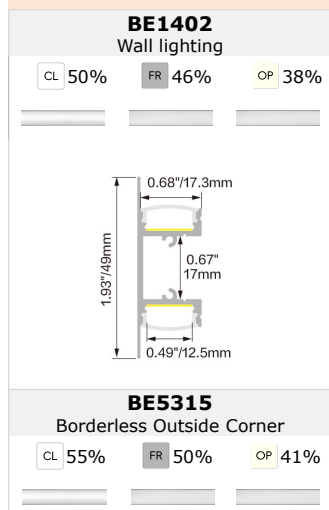

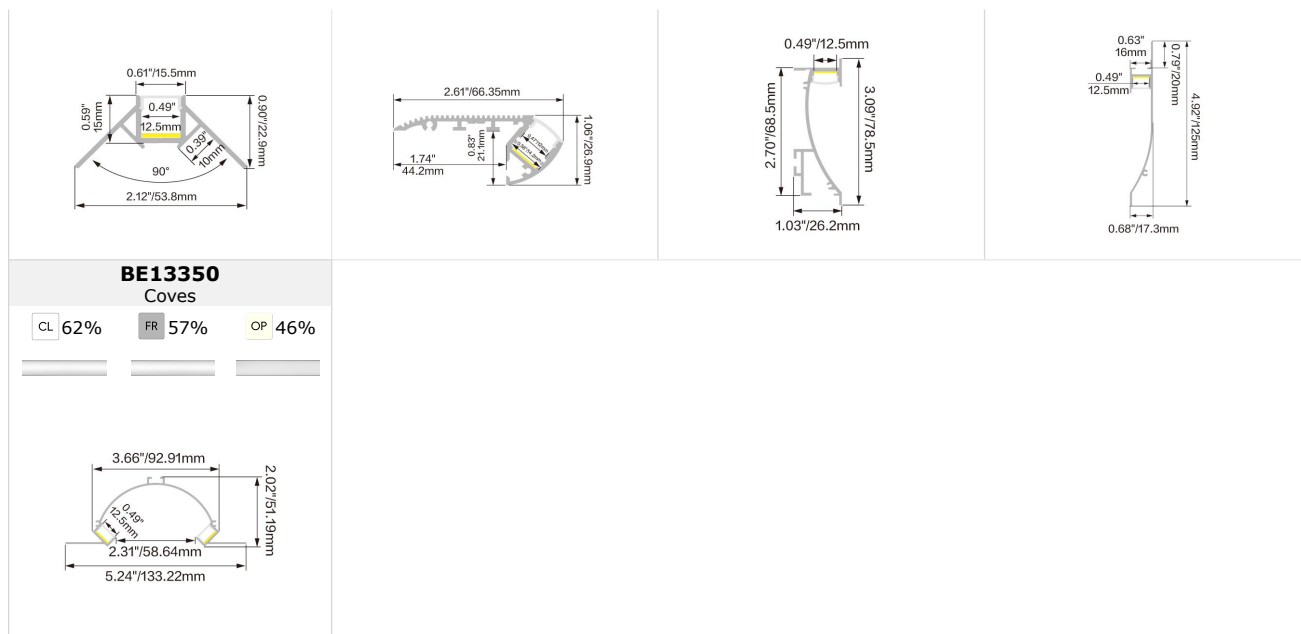

Connectors & Additional Accessories (Optional, purchase for extra)



Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

DMX-dimmable

Code	Max Load	Input	Output	Class 2	Environment	Size (L *W *H)
KVX-24100-5C-A	100W	100-277VAC	24V	Yes	Dry/Damp/Wet	9.05 x 3.07 x 0.98 in. (23.0 x 7.8 x 2.5 cm)

DMX Decoders

Code	Description
LT-905	5 channels output, up to 600W output power

Controllers


Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram

Non-dimmable

ANNO TAPE PRO RGBWW

Indoor -RGBWW

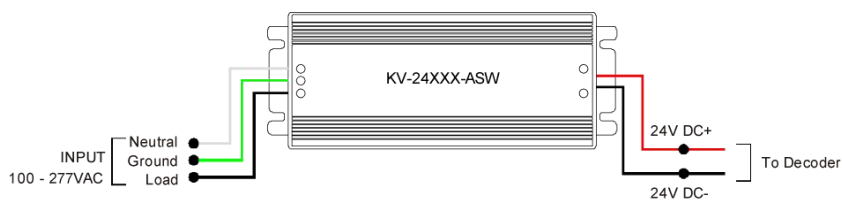

DMX-dimmable



ANNO TAPE PRO RGBWW

Indoor -RGBWW

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)

ANNO TAPE PRO RGBWW

Indoor ·RGBWW

240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)