

Features

- 0.16in. ultra-slim COB tape, tunable white from 2700K to 5000K
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications

Under cabinets, coves, shelves, bedrooms, niches, closets, etc.



Dimensions



0.39in. (10mm)



Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power
ANNOS	D2-Dry (IP20)	24V-DC24V	27K50K-2700K+5000K	4.9-4.88W/ft

Assembly Builder

		Left Feed Entry	
F C	Front Closed	OW	Open wire 3.28ft (1m), 20 AWG
		MC	Male connector with 0.66ft (20cm) cable, 20 AWG
		FC	Female connector with 0.66ft (20cm) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

		Right Feed Entry	Length
F C	Front Closed	OW	Open wire 3.28ft (1m), 20 AWG
		MC	Male connector with 0.66ft (20cm) cable, 20 AWG
		FC	Female connector with 0.66ft (20cm) cable, 20 AWG
		NA	Only for Closed Feed Entry
		Max	16.4ft (5m)
		Increment	1.97in. (50mm)

*For customizations, please inquire.

Lumen Output (lm/ft)

CCT	4.88W/ft
2700K	85
5000K	117
2700K+5000K	230
Max. Run for Class 2	16.4ft (5m)
Max. Run Supported	16.4ft (5m)

*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details

Width	0.39in. (10mm)
LED Quantity	195 LEDs/ft (640 LEDs/M)
Beam Angle	180°
Efficacy	47.1lm/W @ 2700K+5000K 4.88W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Average Life (L70)	> 50,000 hours
Max. Length Per Reel	164ft (50m)
Storage Temperature	-13~140°F (-25°C~60°C)
Ambient Temperature	-13~113°F (-25°C~45°C)

Feed Entry Options



F: Front



C: Closed



Connector Wire Options



OW: Open wire, Dry only
Standard 3.28ft (1m), 20 AWG (wire length made to order)

MC: Male connector, Dry
Standard 0.66ft (20cm), 20 AWG

FC: Female connector, Dry
Standard 0.66ft (20cm), 20 AWG

Connectors & Additional Accessories (Optional, purchase for extra)



ANNO TAPE SV TW Indoor · Tunable White

MC-3P-20
Male SM connector with 0.66ft
(20cm) cable, 2pin, IP20,Dry,
20AWG


FC-3P-20
Female SM connector with 0.66ft
(20cm) cable, 2pin, IP20, Dry,
20AWG

Drivers

Dimmable						
Code	Max Load	Input	Output	Class 2	Environment	Size (L *W *H)
LM-100-24-U2A2	100W	100-277VAC	24V	No	Dry	13.9×1.7×1.2in.(35.2×4.3×3.0cm)

Wiring Diagram

Dimmable

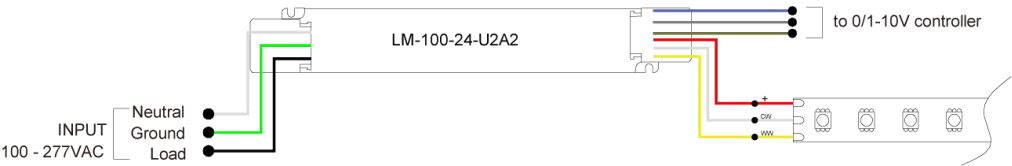

ANNO TAPE SV TW Indoor · Tunable White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)

ANNO TAPE SV TW Indoor · Tunable White

240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)