

ALTA TAPE ULTRA Indoor · Static White

Features

- Ultra high efficiency SMD tape offers up to 1163 lumens per foot
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications

Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.



Dimensions



Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power	Assembly Builder			
ALTAU	D2-Dry (IP20)	24V-DC24V	18K-1800K	8.5-8.54W/ft	F Front C Closed	OW MC FC NA	Left Feed Entry	
			22K-2200K				Open wire 3.28ft (1m), 20 AWG	
			24K-2400K				Male connector with 0.66ft (20cm) cable, 20 AWG	
			27K-2700K				Female connector with 0.66ft (20cm) cable, 20 AWG	
			30K-3000K				Only for Closed Feed Entry	
			35K-3500K					
			40K-4000K					

Assembly Builder

Right Feed Entry			Length
F Front	OW	Open wire 3.28ft (1m), 20 AWG	Increment 1.31in. (33.33mm)
C Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG	
	FC	Female connector with 0.66ft (20cm) cable, 20 AWG	
	NA	Only for Closed Feed Entry	

*For customizations, please inquire.

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	S = Silver anodized	OP - Opal	3.28ft (1m)
	W = White lacquered	FR - Frosted	6.56ft (2m)
	B = Black anodized	CL - Clear	

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

CCT	8.54W/ft
1800K	953
2200K	988
2400K	1023
2700K	1081
3000K	1116
3500K	1128
4000K	1163
Max. Run for Class 2*	9.4ft (2.9m)
Max. Run Supported Length	13.1ft (4m)

*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details

Width	0.39in. (10mm)
LED Quantity	72 LEDs/ft (240 LEDs/m)
Beam Angle	120°
Efficacy	136.2lm/W @4000K 8.54W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Life (L70)	> 54,000 hours
Max. Length Per Reel	164ft (50m)
Storage Temperature	-13-140°F (-25°C- 60°C)
Ambient Temperature	-13-113°F (-25°C- 45°C)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG
(wire length made to order)



MC: Male connector, **Dry & Damp**. Standard 0.66ft (20cm), 20 AWG



FC: Female connector, **Dry & Damp**. Standard 0.66ft (20cm), 20 AWG

ALTA TAPE ULTRA

Indoor · Static White

Channel Compatibility

* Non-standard option, please contact us for customization support.

Lens Type & Light Transmission

CL Clear FR Frosted OP Opal

Surface			
BEI202 CL 59%FR 54%OP 44%	BEI205 CL 82%FR 75%OP 61%	BEI206 CL 75%FR 69%OP 56%	BEI215 CL 52%FR 48%OP 39%
BEI302 CL 81%FR 74%OP 61%	BEI303 CL 64%FR 58%OP 48%	BEI415 CL 52%FR 47%OP 39%	BEI919 CL 74%FR 68%OP 55%
BE2020 CL 75%FR 69%OP 51%			
Mud-In			
BE5615 CL 55%FR 50%OP 41%	BE7615 CL 68%FR 62%OP 51%		

ALTA TAPE ULTRA

Indoor · Static White

Recessed

BE1201 CL 57% FR 52% OP 44%	BE1204 CL 81% FR 74% OP 60%	BE1207 CL 57% FR 52% OP 43%	BE2015 CL 58% FR 53% OP 44%
BE5035 CL 52% FR 47% OP 39%	BE6575 CL 61% FR 55% OP 45%		

Corner

BE1002 CL 83% FR 76% OP 62%	BE1101 CL 54% FR 50% OP 41%	BE1203 CL 69% FR 63% OP 51%
--	--	--

Suspended

BE3535 CL 55% FR 50% OP 41%	BE5075 CL 61% FR 56% OP 46%	BE60 CL 83% FR 76% OP 62%
--	--	--

ALTA TAPE ULTRA

Indoor · Static White

Specialty			
BE1402 Wall lighting CL 71% FR 65% OP 53%	BE1403 Wall lighting CL 76% FR 69% OP 56%	BE1806 Bendable surface mounted CL 86% FR 78% OP 64%	BE2009 Coves CL 54% FR 49% OP 40%
BE3511 Borderless Bi-Color Panel CL 63% FR 57% OP 47%	BE4615 Borderless Inside Corner CL 55% FR 50% OP 41%	BE5315 Borderless Outside Corner CL 54% FR 50% OP 41%	BE6728 Staircase CL 53% FR 49% OP 40%
BE6916 Recessed CL 54% FR 49% OP 40%	BE7030 Cove Recessed Borderless OP 60%	BE8833 Cove Recessed / Double-Layer Borderless CL 56% FR 51% OP 42%	BE12017 Toekick CL 47% FR 43% OP 35%
BE13350 Coves CL 62% FR 56% OP 46%			

ALTA TAPE ULTRA Indoor · Static White

Connectors & Additional Accessories (Optional, purchase for extra)



N6012-STCN-2P-10
Strip to cable connector without wire, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-STC-2P-10
Strip to cable connector with 5.9in. (15cm) wire, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-STS-J-2P-10
Strip to strip jumper connector with 5.9in. (15cm) wire, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-STDCB-2P-10
Strip to cable with black male & female connector, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-STDCW-2P-10
Strip to cable with white male & female connector, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-STS-2P-10
Strip to strip connector, for 0.39in. (10mm) tape, 2 pin, IP20



C6012-LC-2P-10
L-shaped corner connector, for 0.39in. (10mm) tape, 2 pin, IP20



C6012-RC-2P-10
R-shaped corner connector, for 0.39in. (10mm) tape, 2 pin, IP20



MCB-DC-44
Male DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG



FCB-DC-44
Female DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG

ALTA TAPE ULTRA Indoor · Static White

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)


5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

ALTA TAPE ULTRA


Indoor · Static White

Wiring Diagram

Non-dimmable

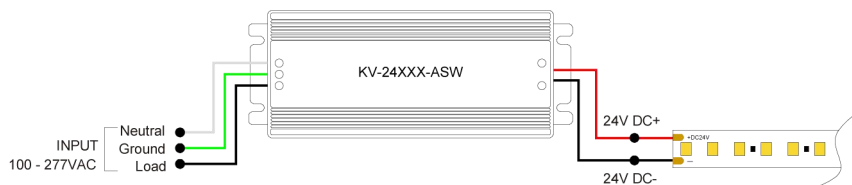


Phase cut/Triac-dimmable

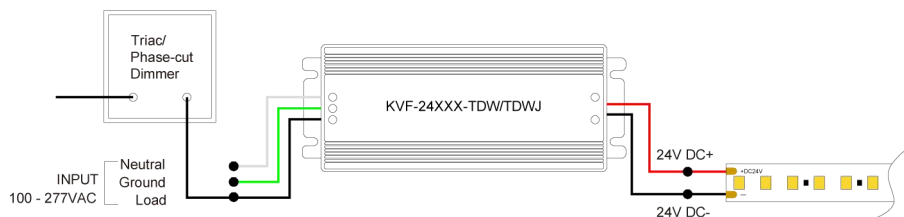

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

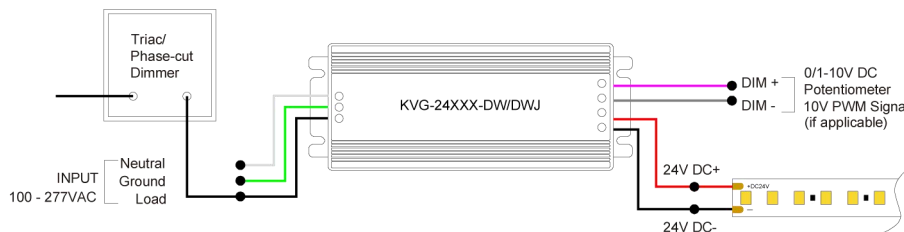

ALTA TAPE ULTRA Indoor · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)