

ARCUS SPEC 3D MEDIUM - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)

Features

The Arcus Combo System combines standard cut and free cut capabilities to provide precise, made-to-order lengths, utilizing Standard Cuts for the majority of the runs, with Free Cuts reserved only for the finishing segments. This combo usage achieves cost savings of 20–40% versus using Free Cuts for the entire length. Both Arcus Standard Cut and Free Cut maintain consistent binning and brightness.

The system is suitable for indoor and outdoor applications, and delivers exceptional performance with a CRI over 95, brightness of up to 263 lm/ft, and 1-step binning, ensuring robustness and design flexibility.


Applications

Living rooms, TV walls, feature walls, under-cabinet areas, staircases, ceiling coves, hallways, etc.


Date	Fixture type
Project name	Project phase



Combo System

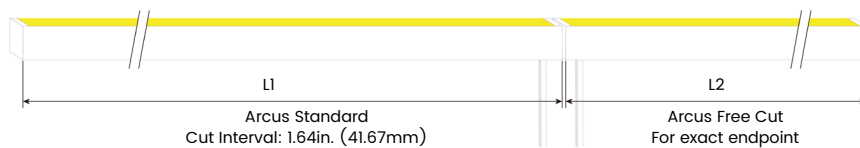

Bending Directions & Diameters

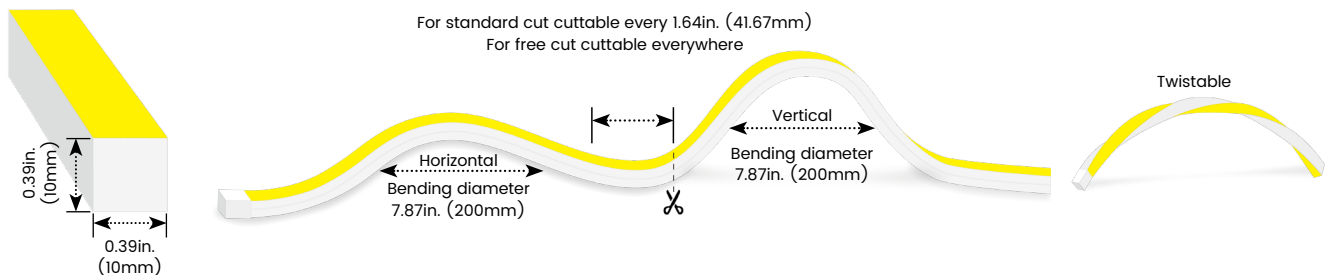

Order Code

Model	Environment	Voltage	CCT	Power	End Cap	Assembly Builder			
						Left Feed Entry			
AS3DM	D5-Dry (IP54)	24V-DC24V	27K-2700K	3.1-3.05W/ft	FT Flush Translucent	F Front	OW	Open wire 3.28ft (1m)	
AS3DMFC	W7-Wet(IP67)		30K-3000K		FO Flush Opaque	B Bottom	MC	Male connector with 11.81in. (300mm) cable	
			35K-3500K			S Side	FC	Female connector with 11.81in. (300mm) cable	
			40K-4000K			C Closed	NA	Only for Closed Feed Entry	

*AS3DMFC: Free Cut delivers precise field-cut lengths for the last segment, while keeping in line with standard cut in dimensions, binning, output, and mounting for a uniform appearance.

Assembly Builder

Right Feed Entry				Length	
F	Front	OW	Open wire 3.28ft (1m)	Max. nominal	16.4ft(5m)
B	Bottom	MC	Male connector with 11.81in. (300mm) cable	*For Standard Cut	
S	Side	FC	Female connector with 11.81in. (300mm) cable	Increment	1.64in. (41.67mm)
C	Closed	NA	Only for Closed Feed Entry	*For Standard Cut	

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code
Please select on the Mounting Options page

ARCUS SPEC 3D MEDIUM - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)

Lumen Output (lm/ft)

CCT	3.05W/ft
■ 2700K	231
■ 3000K	239
■ 3500K	257
■ 4000K	263
Max. Run for Class 2 - Standard Cut	16.4ft (5m)
Max. Run Supported Length for Standard Cut	16.4ft (5m)
Max. Run for Class 2 - Free Cut	13.1ft (4m)
Max. Run Supported Length for Free Cut	13.1ft (4m)


*Typically installations in USA and Canada comply with Class 2 requirements

Technical Details

Efficacy	78lm/W @3000K 3.05W
CRI	CRI>95
Beam Angle	120°
LED MacAdam	1 step
IK Rating	IK08 (with aluminium profile)
Average Life (L70B10)	>44,000 hours
Storage Temperature	-40°F-149°F (-40°C~ 65°C)
Operating Temperature	-40°F-149°F (-40°C~ 65°C)

Photometry


AS3DM-D5-24V-30K-3.1-FT-F-OW-F-OW
 ARCUS SPEC 3D MEDIUM, 3D bending, 3000K, 3.05W/ft

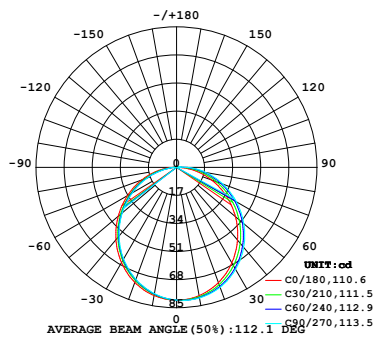

Zonal Lumen Summary

Zone	Lumen	% Fixture
0-30	62.1	26.0%
0-40	101.4	42.5%
0-60	179.2	75.0%
0-90	234.2	98.1%
0-180	238.8	100.0%

TM30
 ARCUS SPEC 3D MEDIUM, 3D bending, 3500K, 3.05W/ft

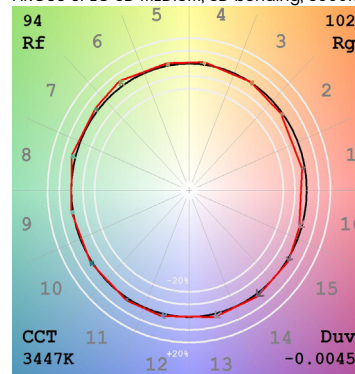


ARCUS SPEC 3D MEDIUM - COMBO SYSTEM

3D Bending · Static White


(Standard Cut + Free Cut Finishing Piece)

Feed Entry / End Cap Options


FT: Flush Translucent – IP67, factory-made only

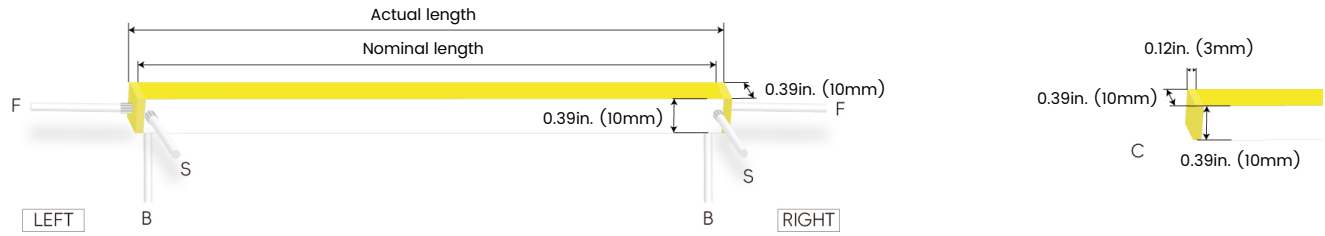

FO: Flush Opaque – IP67, factory-made only

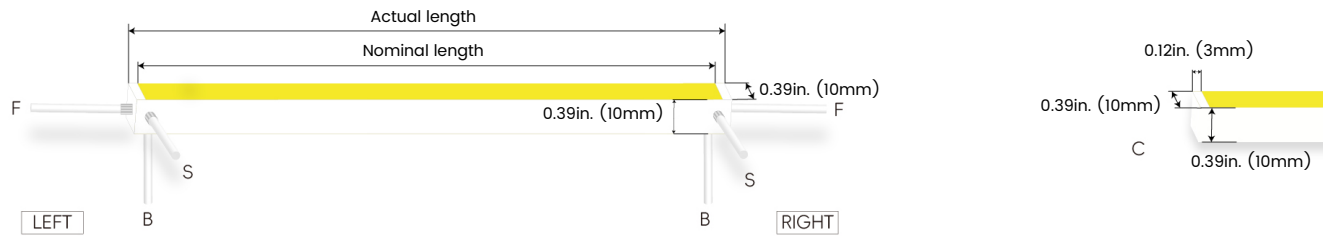


Silicone end cap – IP67, for field cuttable only

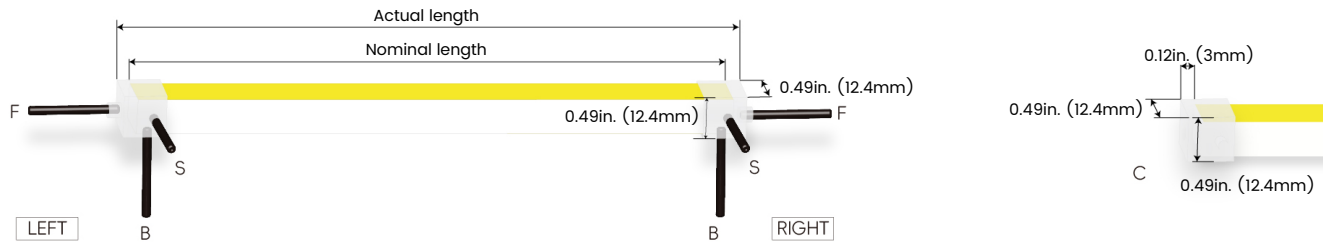

Connector Wire Options



OW: Open wire, **Dry only**
Standard 11.81in. (300mm), 20 AWG,
wire length customizable



MC: Male connector, **Wet**
Standard 11.81in. (300mm), 20 AWG



























FC: Female connector, **Wet**
Standard 11.81in. (300mm), 20 AWG

ARCUS SPEC 3D MEDIUM - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)

Mounting Options


			<p>NF1010-SC</p> <table border="1"> <tr><td>Name</td><td>Straight surface channel</td></tr> <tr><td>Material</td><td>Aluminum</td></tr> <tr><td>Standard Length</td><td>3.28ft (1m)</td></tr> </table>	Name	Straight surface channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Straight surface channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			<p>NF1010-BC</p> <table border="1"> <tr><td>Name</td><td>Bendable surface channel</td></tr> <tr><td>Material</td><td>Stainless Steel</td></tr> <tr><td>Standard Length</td><td>3.28ft (1m)</td></tr> <tr><td>Min. Bending Radius</td><td>1.97in. (50mm)</td></tr> </table> <p>*Not suitable for upside-down installation</p>	Name	Bendable surface channel	Material	Stainless Steel	Standard Length	3.28ft (1m)	Min. Bending Radius	1.97in. (50mm)
Name	Bendable surface channel										
Material	Stainless Steel										
Standard Length	3.28ft (1m)										
Min. Bending Radius	1.97in. (50mm)										
			<p>NF1010-MC</p> <table border="1"> <tr><td>Name</td><td>Mud-in channel</td></tr> <tr><td>Material</td><td>Aluminum</td></tr> <tr><td>Standard Length</td><td>3.28ft (1m)</td></tr> </table>	Name	Mud-in channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Mud-in channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			<p>NF1010-IC</p> <table border="1"> <tr><td>Name</td><td>Inside corner channel</td></tr> <tr><td>Material</td><td>Aluminum</td></tr> <tr><td>Standard Length</td><td>3.28ft (1m)</td></tr> </table>	Name	Inside corner channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Inside corner channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			<p>NF1010-OC</p> <table border="1"> <tr><td>Name</td><td>Outside corner channel</td></tr> <tr><td>Material</td><td>Aluminum</td></tr> <tr><td>Standard Length</td><td>3.28ft (1m)</td></tr> </table>	Name	Outside corner channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Outside corner channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			<p>NF1010-SBC</p> <table border="1"> <tr><td>Name</td><td>Skirting board channel</td></tr> <tr><td>Material</td><td>Aluminum</td></tr> <tr><td>Standard Length</td><td>3.28ft (1m)</td></tr> </table>	Name	Skirting board channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Skirting board channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			<p>NF1010-PC</p> <table border="1"> <tr><td>Name</td><td>PC channel</td></tr> <tr><td>Material</td><td>PC</td></tr> <tr><td>Standard Length</td><td>3.28ft (1m)</td></tr> </table>	Name	PC channel	Material	PC	Standard Length	3.28ft (1m)		
Name	PC channel										
Material	PC										
Standard Length	3.28ft (1m)										
			<p>NF1010-BPC</p> <table border="1"> <tr><td>Name</td><td>Bendable PC channel</td></tr> <tr><td>Material</td><td>PC</td></tr> <tr><td>Standard Length</td><td>3.28ft (1m)</td></tr> </table>	Name	Bendable PC channel	Material	PC	Standard Length	3.28ft (1m)		
Name	Bendable PC channel										
Material	PC										
Standard Length	3.28ft (1m)										

ARCUS SPEC 3D MEDIUM - COMBO SYSTEM

3D Bending · Static White


(Standard Cut + Free Cut Finishing Piece)

Mounting Options



NF1010-CL

Name	Mounting clip
Material	Aluminum
Standard Length	0.98in. (25mm)



NF1010-CLS


Name	Mounting clip
Material	Stainless Steel
Standard Length	0.28in. (7mm)
*Not suitable for upside-down installation	

ARCUS SPEC 3D MEDIUM - COMBO SYSTEM


(Standard Cut + Free Cut Finishing Piece)

3D Bending · Static White


Silicone End Caps (Optional, purchase for extra)



NF1010-SEC-C
Silicone closed end cap



NF1010-SEC-F-2P
Silicone end cap front entry with
11.81in. (300mm) cable, 2 pin



NF1010-SEC-S-2P
Silicone end cap side entry with
11.81in. (300mm) cable, 2 pin



NF1010-SEC-B-2P
Silicone end cap bottom entry with
11.81in. (300mm) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector,
11.81in. (300mm) white cable,
2 pin, IP67, Wet, 20 AWG



FCW-2P-67
Female connector,
11.81in. (300mm) white cable,
2 pin, IP67, Wet, 20 AWG



MCB-2P-67
Male connector,
11.81in. (300mm) black cable,
2 pin, IP67, Wet, 20 AWG



FCB-2P-67
Female connector,
11.81in. (300mm) black cable,
2 pin, IP67, Wet, 20 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades

ARCUS SPEC 3D MEDIUM - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KV-24060-ASW	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KV-24096-ASW	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KVF-24060-TDW	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KVF-24096-TDW	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)
KVF-24030-TDWJ	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.5 x 3.6 x 1in. (165 x 92 x 26mm)
KVF-24060-TDWJ	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.4 x 3.6 x 1in. (188 x 92 x 26mm)
KVF-24096-TDWJ	96W	100-277VAC	24V	Yes	Yes	Dry/Damp	8.7 x 3.7 x 1.6in. (220 x 93 x 41mm)
KVF-24192-TDWJ	192W (96Wx2)	100-277VAC	24V	Yes	Yes	Dry/Damp	10.9 x 4.3 x 1.8in. (278 x 110 x 45mm)
KVF-24288-TDWJ	288W (96Wx3)	100-277VAC	24V	Yes	Yes	Dry/Damp	11.9 x 4.3 x 1.8in. (301 x 110 x 45mm)
KVF-24384-TDWJ	384W (96Wx4)	100-277VAC	24V	Yes	Yes	Dry/Damp	12.7 x 5.5 x 1.9in. (323 x 140 x 48mm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KVD-24060-DIM	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KVD-24096-DIM	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)
KVD-24030-DIMJ	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.5 x 3.6 x 1in. (165 x 92 x 26mm)
KVD-24060-DIMJ	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.4 x 3.6 x 1in. (188 x 92 x 26mm)
KVD-24096-DIMJ	96W	100-277VAC	24V	Yes	Yes	Dry/Damp	8.7 x 3.7 x 1.6in. (220 x 93 x 41mm)
KVD-24192-DIMJ	192W (96Wx2)	100-277VAC	24V	Yes	Yes	Dry/Damp	10.9 x 4.3 x 1.8in. (278 x 110 x 45mm)
KVD-24288-DIMJ	288W (96Wx3)	100-277VAC	24V	Yes	Yes	Dry/Damp	11.9 x 4.3 x 1.8in. (301 x 110 x 45mm)
KVD-24384-DIMJ	384W (96Wx4)	100-277VAC	24V	Yes	Yes	Dry/Damp	12.7 x 5.5 x 1.9in. (323 x 140 x 48mm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KVG-24060-DW	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KVG-24096-DW	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)
KVG-24030-DWJ	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (165 x 95 x 40mm)
KVG-24060-DWJ	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.4 x 3.7 x 1.6in. (188 x 95 x 40mm)
KVG-24096-DWJ	96W	100-277VAC	24V	Yes	Yes	Dry/Damp	8.7 x 3.7 x 1.6in. (220 x 95 x 40mm)
KVG-C24192-DWJ	192W (96Wx2)	100-277VAC	24V	Yes	Yes	Dry/Damp	10.9 x 4.3 x 1.8in. (278 x 110 x 45mm)
KVG-C24288-DWJ	288W (96Wx3)	100-277VAC	24V	Yes	Yes	Dry/Damp	11.9 x 4.3 x 1.8in. (301 x 110 x 45mm)
KVG-C24384-DWJ	384W (96Wx4)	100-277VAC	24V	Yes	Yes	Dry/Damp	12.8 x 5.5 x 1.9in. (325 x 140 x 48mm)


ARCUS SPEC 3D MEDIUM - COMBO SYSTEM

(Standard Cut + Free Cut Finishing Piece)


3D Bending · Static White

Wiring Diagram

Non-dimmable

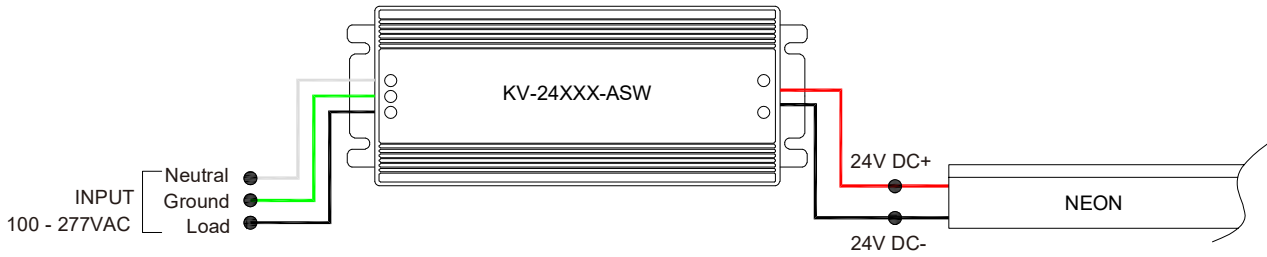


Phase cut/Triac-dimmable

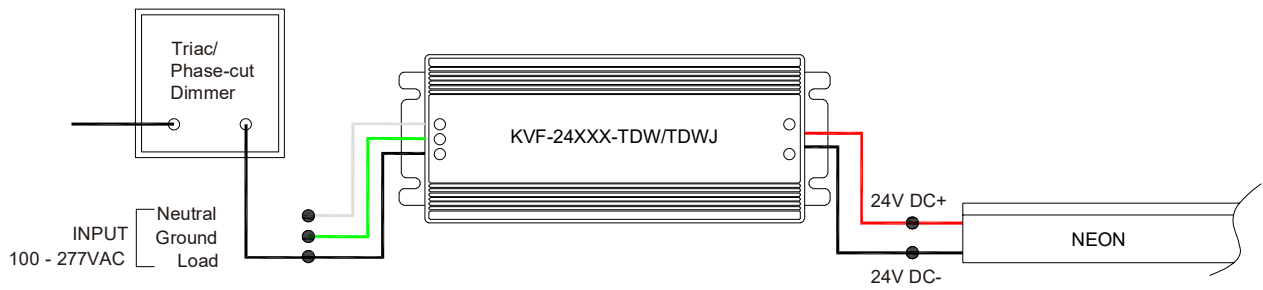

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

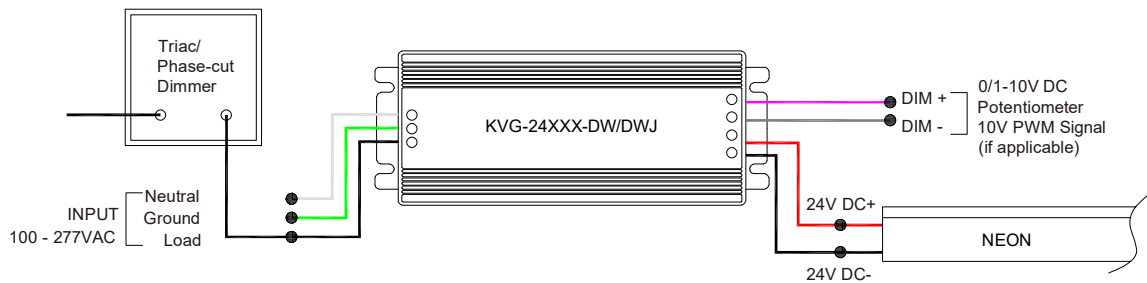

ARCUS SPEC 3D MEDIUM - COMBO SYSTEM

3D Bending · Static White

(Standard Cut + Free Cut Finishing Piece)

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)