

Beamever

LINIO NEON 1010X 3S TV

Designer's Custom Playground

Vertical Bending · Static White

Features

- 3-sides emitting design offers smooth diffusion at direct view
- IP68 rated, ideal for outdoor uses, not for underwater project
- 5 years warranty

Applications


Gardens, parks, hotels, facades, pathways, outdoor steps, etc.

Date


Fixture type

Project name



Project phase

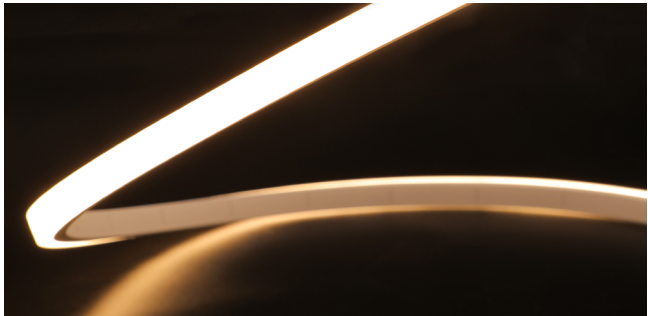

Bending Directions & Diameters



Dimensions

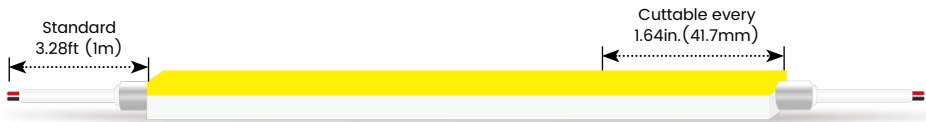

Order Code

Model	Environment	Voltage	CCT	Power	End Cap		Left Feed Entry			
LN1010X3STV	W8-Wet (IP68)	24V-DC24V	22K-2200K	3.4-3.35W/ft	FT	Flush Translucent	F	Front	OW	Open wire 3.28ft (1m)
			27K-2700K		FO	Flush Opaque	B	Bottom	MC	Male connector with 11.81in. (300mm) cable
			30K-3000K				S	Side	FC	Female connector with 11.81in. (300mm)cable
			35K-3500K				C	Closed	NA	Only for Closed Feed Entry
			40K-4000K							
			53K-5300K							

Assembly Builder

Assembly Builder

Right Feed Entry				Length	
F Front	OW	Open wire 3.28ft (1m)		Max. nominal	42.7ft (13m)
B Bottom	MC	Male connector with 11.81in. (300mm) cable		Increment	1.64in. (41.7mm)
S Side	FC	Female connector with 11.81in. (300mm)cable			
C Closed	NA	Only for Closed Feed Entry			

Mounting Order Code

Product Code

Please select on the Mounting Options page

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Beamever

LINIO NEON 1010X 3S TV

Designer's Custom Playground

Vertical Bending · Static White

Lumen Output (lm/ft)


CCT	3.35W/ft
2200K	253
2700K	274
3000K	282
3500K	287
4000K	290
5300K	277
Max. Run for Class 2*	23.9ft (7.3m)
Max. Run Supported Length	42.7ft (13m)
*Typically installations in USA and Canada comply with Class 2 requirements	

Technical Details

Efficacy	84lm/W @3000K 3.35W
CRI	Ra≥90
Beam Angle	160°(3-sides emitting)
LED MacAdam	2 steps
Average Life (L80B10)	>52,000 hours
Storage Temperature	-40°F~149°F (-40°C~ 65°C)
Operating Temperature	-40°F~149°F (-40°C~ 65°C)

Photometry


LN1010X3STV-W8-24V-30K-3.4-FT-F-OW-F-OW
LINIO NEON 1010X 3S TV, Vertical Bend, 3000K, 3.35W/ft

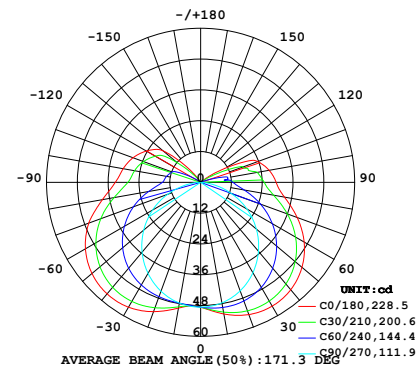


Zonal Lumen Summary		
Zone	Lumen	% Fixture
0-30	41.89	14.80%
0-40	72.3	25.6%
0-60	143.5	50.8%
0-90	228.6	81.0%
0-180	282.3	100.0%

Feed Entry / End Cap Options


FT: Flush Translucent – IP68, factory-made only

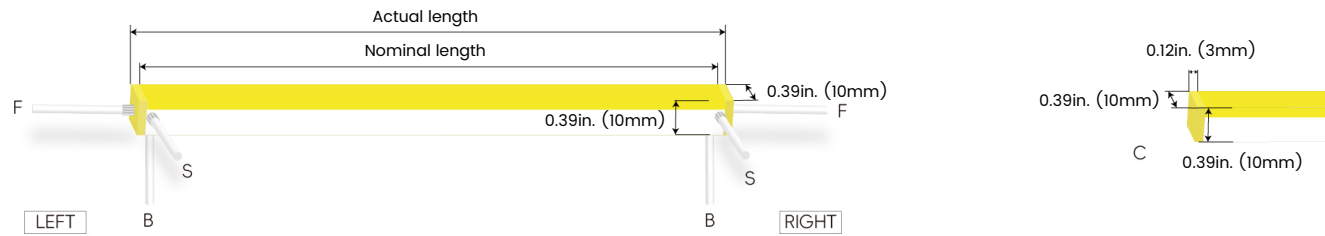

FO: Flush Opaque – IP68, factory-made only

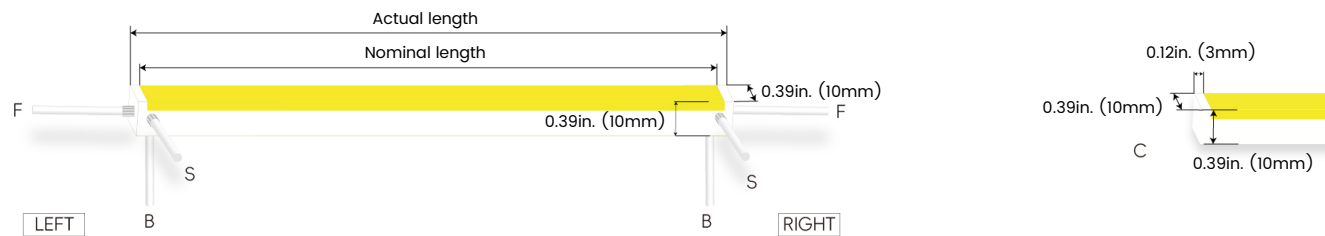


Silicone end cap – IP67, for field cuttable only

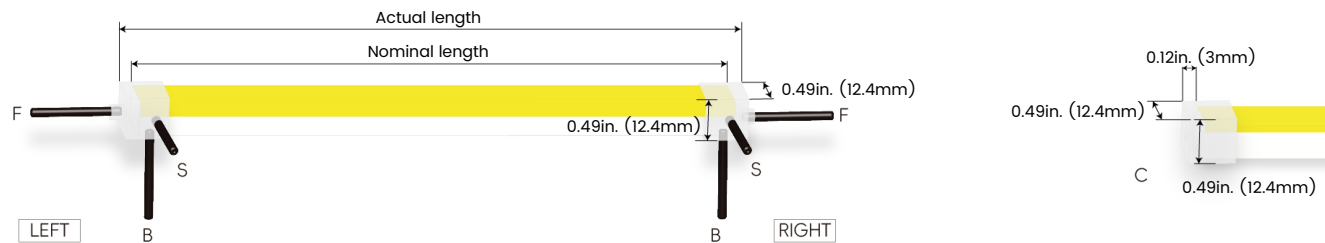


Connector Wire Options



OW: Open wire, **Dry** only
Standard 11.8lin. (300mm), 20 AWG,
wire length customizable













MC: Male connector, **Wet**
Standard 11.8lin. (300mm), 20 AWG



FC: Female connector, **Wet**
Standard 11.8lin. (300mm), 20 AWG

Mounting Options

			NF1010-SC <table><tr><td>Name</td><td>Straight surface channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr></table>	Name	Straight surface channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Straight surface channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			NF1010-BC <table><tr><td>Name</td><td>Bendable surface channel</td></tr><tr><td>Material</td><td>Stainless Steel</td></tr><tr><td>Standard Length</td><td>19.69in. (500mm)</td></tr><tr><td>Min. Bending Radius</td><td>1.97in. (50mm)</td></tr></table> *Not suitable for upside-down installation	Name	Bendable surface channel	Material	Stainless Steel	Standard Length	19.69in. (500mm)	Min. Bending Radius	1.97in. (50mm)
Name	Bendable surface channel										
Material	Stainless Steel										
Standard Length	19.69in. (500mm)										
Min. Bending Radius	1.97in. (50mm)										
			NF1010-MC <table><tr><td>Name</td><td>Mud-in channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr></table>	Name	Mud-in channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Mud-in channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			NF1010-IC <table><tr><td>Name</td><td>Inside corner channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr></table>	Name	Inside corner channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Inside corner channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			NF1010-OC <table><tr><td>Name</td><td>Outside corner channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr></table>	Name	Outside corner channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Outside corner channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			NF1010-SBC <table><tr><td>Name</td><td>Skirting board channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr></table>	Name	Skirting board channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Skirting board channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			NF1010-PC <table><tr><td>Name</td><td>PC channel</td></tr><tr><td>Material</td><td>PC</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr></table>	Name	PC channel	Material	PC	Standard Length	3.28ft (1m)		
Name	PC channel										
Material	PC										
Standard Length	3.28ft (1m)										
			NF1010-BPC <table><tr><td>Name</td><td>Bendable PC channel</td></tr><tr><td>Material</td><td>PC</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr></table>	Name	Bendable PC channel	Material	PC	Standard Length	3.28ft (1m)		
Name	Bendable PC channel										
Material	PC										
Standard Length	3.28ft (1m)										

Mounting Options

0.41" / 10.4mm

0.51" / 12.9mm

0.49" / 12.4mm

0.33" / 8.5mm

0.41" / 10.5mm

NF1010-CL

Name	Mounting clip
Material	Aluminum
Standard Length	0.98in. (25mm)

NF1010-CLS

Name	Mounting clip
Material	Stainless Steel
Standard Length	0.28in. (7mm)

*Not suitable for upside-down installation


Beamever

LINIO NEON 1010X 3S TV

Designer's Custom Playground

Vertical Bending · Static White

Silicone End Caps (Optional, purchase for extra)



NF1010-SEC-C
Silicone closed end cap



NF1010-SEC-F-2P
Silicone end cap front entry with 11.8lin. (300mm) cable, 2 pin



NF1010-SEC-S-2P
Silicone end cap side entry with 11.8lin. (300mm) cable, 2 pin



NF1010-SEC-B-2P
Silicone end cap bottom entry with 11.8lin. (300mm) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector, 11.8lin. (300mm) white cable, 2 pin, IP67, Wet, 20 AWG



FCW-2P-67
Female connector, 11.8lin. (300mm) white cable, 2 pin, IP67, Wet, 20 AWG



MCB-2P-67
Male connector, 11.8lin. (300mm) black cable, 2 pin, IP67, Wet, 20 AWG



FCB-2P-67
Female connector, 11.8lin. (300mm) black cable, 2 pin, IP67, Wet, 20 AWG



ADJS
1 Adjustable Angle Scissors Set, with 4 Spare Blades

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KV-24060-ASW	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KV-24096-ASW	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KVF-24060-TDW	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KVF-24096-TDW	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)
KVF-24030-TDWJ	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.5 x 3.6 x 1in. (165 x 92 x 26mm)
KVF-24060-TDWJ	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.4 x 3.6 x 1in. (188 x 92 x 26mm)
KVF-24096-TDWJ	96W	100-277VAC	24V	Yes	Yes	Dry/Damp	8.7 x 3.7 x 1.6in. (220 x 93 x 41mm)
KVF-24192-TDWJ	192W (96Wx2)	100-277VAC	24V	Yes	Yes	Dry/Damp	10.9 x 4.3 x 1.8in. (278 x 110 x 45mm)
KVF-24288-TDWJ	288W (96Wx3)	100-277VAC	24V	Yes	Yes	Dry/Damp	11.9 x 4.3 x 1.8in. (301 x 110 x 45mm)
KVF-24384-TDWJ	384W (96Wx4)	100-277VAC	24V	Yes	Yes	Dry/Damp	12.7 x 5.5 x 1.9in. (323 x 140 x 48mm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KVD-24060-DIM	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KVD-24096-DIM	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)
KVD-24030-DIMJ	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.5 x 3.6 x 1in. (165 x 92 x 26mm)
KVD-24060-DIMJ	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.4 x 3.6 x 1in. (188 x 92 x 26mm)
KVD-24096-DIMJ	96W	100-277VAC	24V	Yes	Yes	Dry/Damp	8.7 x 3.7 x 1.6in. (220 x 93 x 41mm)
KVD-24192-DIMJ	192W (96Wx2)	100-277VAC	24V	Yes	Yes	Dry/Damp	10.9 x 4.3 x 1.8in. (278 x 110 x 45mm)
KVD-24288-DIMJ	288W (96Wx3)	100-277VAC	24V	Yes	Yes	Dry/Damp	11.9 x 4.3 x 1.8in. (301 x 110 x 45mm)
KVD-24384-DIMJ	384W (96Wx4)	100-277VAC	24V	Yes	Yes	Dry/Damp	12.7 x 5.5 x 1.9in. (323 x 140 x 48mm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KVG-24060-DW	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KVG-24096-DW	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)
KVG-24030-DWJ	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (165 x 95 x 40mm)
KVG-24060-DWJ	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.4 x 3.7 x 1.6in. (188 x 95 x 40mm)
KVG-24096-DWJ	96W	100-277VAC	24V	Yes	Yes	Dry/Damp	8.7 x 3.7 x 1.6in. (220 x 95 x 40mm)
KVG-C24192-DWJ	192W (96Wx2)	100-277VAC	24V	Yes	Yes	Dry/Damp	10.9 x 4.3 x 1.8in. (278 x 110 x 45mm)
KVG-C24288-DWJ	288W (96Wx3)	100-277VAC	24V	Yes	Yes	Dry/Damp	11.9 x 4.3 x 1.8in. (301 x 110 x 45mm)
KVG-C24384-DWJ	384W (96Wx4)	100-277VAC	24V	Yes	Yes	Dry/Damp	12.8 x 5.5 x 1.9in. (325 x 140 x 48mm)

Wiring Diagram

Non-dimmable

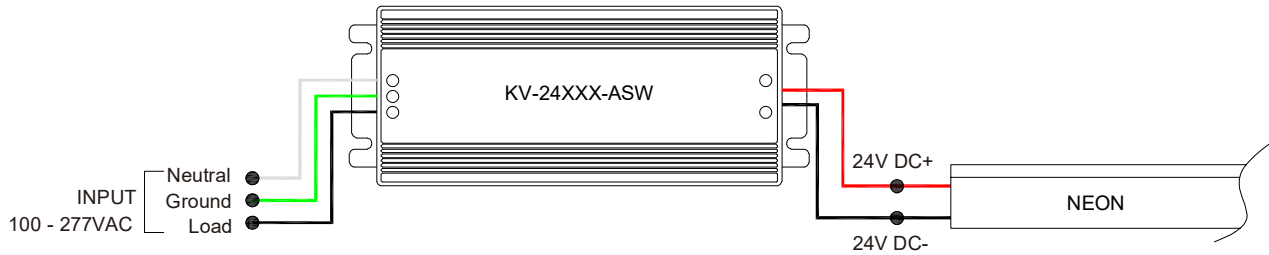

Phase cut/Triac-dimmable

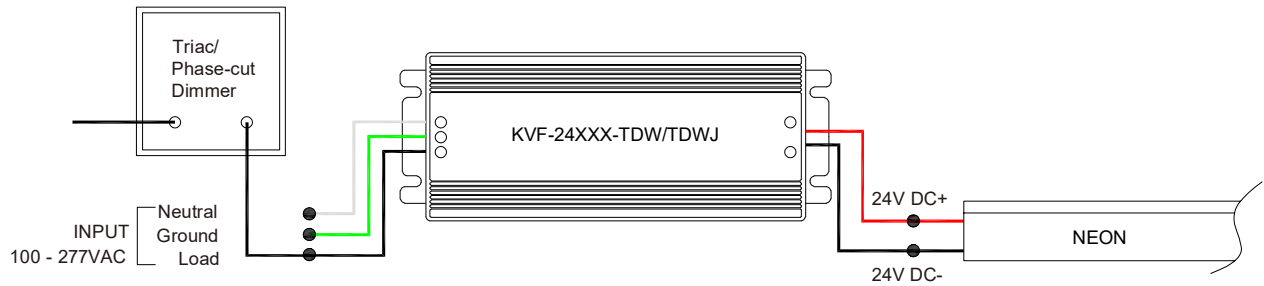

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)