

Beamever

LINIO NEON 1228X SV RGBW

Designer's Custom Playground

Horizontal Bending · RGBW

Features

- Dome top, eye-catching at three angles, changeable RGBW colors
- IP68 rated, ideal for outdoor uses, not for underwater project
- 3 years warranty

Date

Fixture type



Project name

Project phase



Applications

Museums, malls, amusement parks, restaurants, resorts, etc.

Bending Directions & Diameters

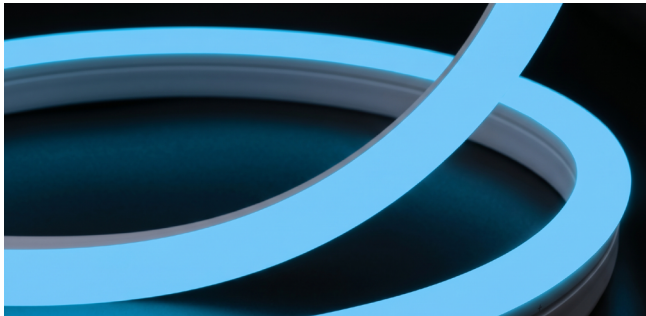

Dimensions

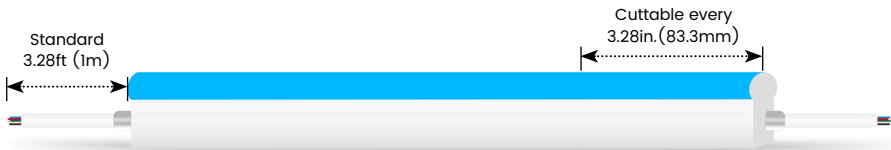

Order Code

Model	Environment	Voltage	CCT	Power	End Cap	Left Feed Entry	
LN1228XSV	W8-Wet (IP68)	24V-DC24V	RGBW27K-RGBW2700K RGBW30K-RGBW3000K RGBW35K-RGBW3500K RGBW40K-RGBW4000K	5.2-5.18W/ft	FT Flush Translucent FO Flush Opaque	F Front B Bottom S Side C Closed	OW Open wire 3.28ft (1m) OA Open Wire with Anti-Wicking Ferrule MC Male connector with 11.8in. (300mm) cable FC Female connector with 11.8in. (300mm)cable NA Only for Closed Feed Entry

Assembly Builder

Assembly Builder

Right Feed Entry			Length	
F Front	OW	Open wire 3.28ft (1m)	Max. nominal	29.5ft (9m)
B Bottom	OA	Open Wire with Anti-Wicking Ferrule	Increment	3.28in. (83.3mm)
S Side	MC	Male connector with 11.8in. (300mm) cable		
C Closed	FC	Female connector with 11.8in. (300mm)cable		
	NA	Only for Closed Feed Entry		

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

Product Code

Please select on the Mounting Options page

Beamever

LINIO NEON 1228X SV RGBW

Designer's Custom Playground

Horizontal Bending · RGBW

Lumen Output (lm/ft)

CCT	5.18W/ft
R	15
G	40
B	11
W27K	50
W30K	50
W35K	51
W40K	51
RGBW27K	115
RGBW30K	113
RGBW35K	111
RGBW40K	111
Max. Run for Class 2*	15.4ft (4.7m)
Max. Run Supported Length	29.5ft (9m)


*Typically installations in USA and Canada comply with Class 2 requirements

Technical Details

Efficacy	22lm/W @RGBW30K 5.18W
CRI	Ra≥80
Average Life (L80B10)	>46,000 hours
Storage Temperature	-40°F~-149°F (-40°C~ 65°C)
Operating Temperature	-40°F~-149°F (-40°C~ 65°C)

Photometry

LNI228XSV-W8-24V-RGBW30K-5.2-FT-F-OW-F-OW
LINIO NEON 1228X SV RGBW, Horizontal bend, RGBW30K, 5.18W/ft

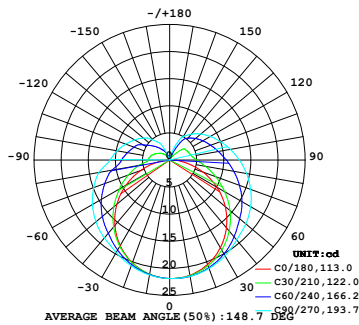


Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	17.3	15.3%
0-40	28.8	25.6%
0-60	54.5	48.3%
0-90	86.0	76.2%
0-180	112.8	100.0%

Feed Entry / End Cap Options


FT: Flush Translucent – IP68, factory-made only

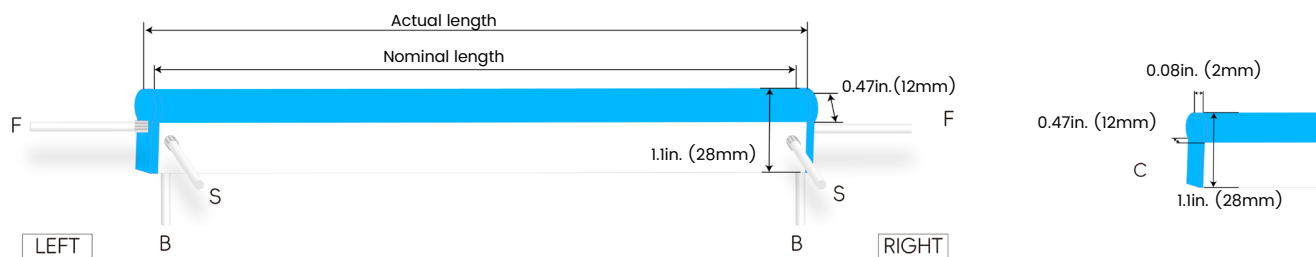

FO: Flush Opaque – IP68, factory-made only

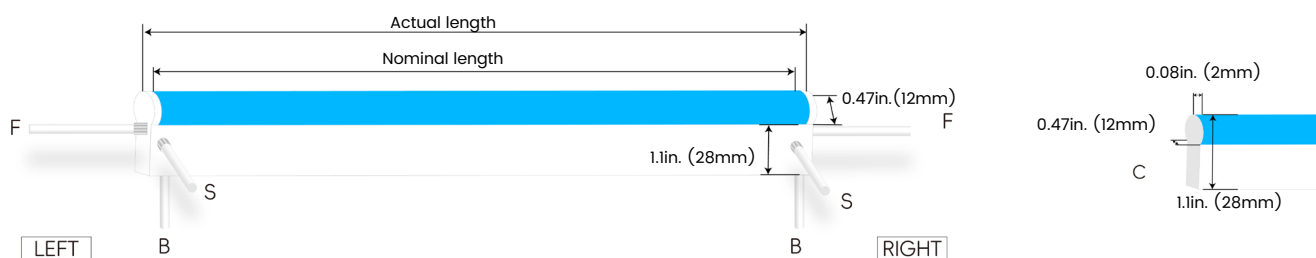

Silicone end cap – IP67, for field cuttable only

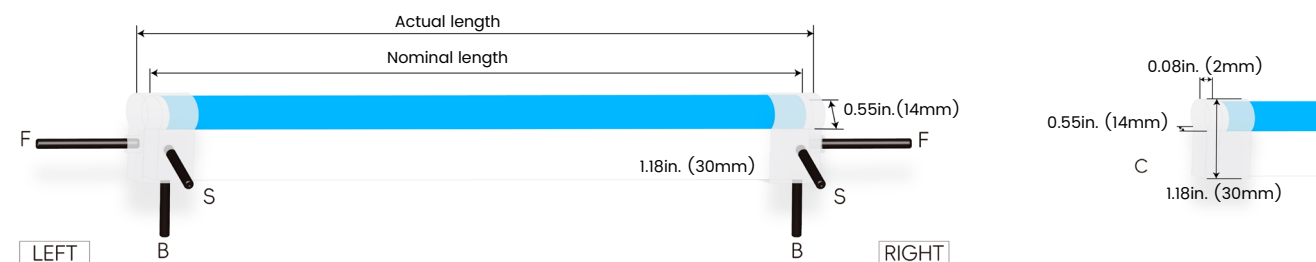

Connector Wire Options




OW: Open wire, Dry only
Standard 11.81in. (300mm), 20 AWG,
wire length customizable



MC: Male connector, Wet
Standard 11.81in. (300mm), 20 AWG










FC: Female connector, Wet
Standard 11.81in. (300mm), 20 AWG




OA: Open Wire with Anti-Wicking Ferrule, Wet
Standard 11.81in. (300mm), 20 AWG,
Protects against water ingress through the power cable

Mounting Options

			NF1228-SC <table><tr><td>Name</td><td>Straight surface channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr></table>	Name	Straight surface channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Straight surface channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			NF1228-BC <table><tr><td>Name</td><td>Bendable surface channel</td></tr><tr><td>Material</td><td>Stainless Steel</td></tr><tr><td>Standard Length</td><td>19.69in. (500mm)</td></tr><tr><td>Min. Bending Diameter</td><td>11.8lin. (300mm)</td></tr></table> *Not suitable for upside-down installation	Name	Bendable surface channel	Material	Stainless Steel	Standard Length	19.69in. (500mm)	Min. Bending Diameter	11.8lin. (300mm)
Name	Bendable surface channel										
Material	Stainless Steel										
Standard Length	19.69in. (500mm)										
Min. Bending Diameter	11.8lin. (300mm)										
			NF1228-RC <table><tr><td>Name</td><td>Straight recessed channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr></table>	Name	Straight recessed channel	Material	Aluminum	Standard Length	3.28ft (1m)		
Name	Straight recessed channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
			NF1228-BCA <table><tr><td>Name</td><td>Bendable surface channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1m)</td></tr><tr><td>Min. Bending Diameter</td><td>11.8lin. (300mm)</td></tr></table>	Name	Bendable surface channel	Material	Aluminum	Standard Length	3.28ft (1m)	Min. Bending Diameter	11.8lin. (300mm)
Name	Bendable surface channel										
Material	Aluminum										
Standard Length	3.28ft (1m)										
Min. Bending Diameter	11.8lin. (300mm)										
			NF1228-CL <table><tr><td>Name</td><td>Mounting clip</td></tr><tr><td>Material</td><td>Stainless Steel</td></tr><tr><td>Standard Length</td><td>0.79in. (20mm)</td></tr></table> *Not suitable for upside-down installation	Name	Mounting clip	Material	Stainless Steel	Standard Length	0.79in. (20mm)		
Name	Mounting clip										
Material	Stainless Steel										
Standard Length	0.79in. (20mm)										

Silicone End Caps (Optional, purchase for extra)



NF1228-SEC-C
Silicone closed end cap



NF1228-SEC-F-5P
Silicone end cap front entry with
11.8lin. (300mm) cable, 5 pin



NF1228-SEC-S-5P
Silicone end cap side entry with
11.8lin. (300mm) cable, 5 pin



NF1228-SEC-B-5P
Silicone end cap bottom entry with
11.8lin. (300mm) cable, 5 pin

Additional Accessories (Optional, purchase for extra)



MCW-5P-67
Male connector,
11.8lin. (300mm) white cable,
5 pin, IP67, Wet, 20 AWG



FCW-5P-67
Female connector,
11.8lin. (300mm) white cable,
5 pin, IP67, Wet, 20 AWG



MCB-5P-67
Male connector,
11.8lin. (300mm) black cable,
5 pin, IP67, Wet, 20 AWG



FCB-5P-67
Female connector,
11.8lin. (300mm) black cable,
5 pin, IP67, Wet, 20 AWG



ADJS
1 Adjustable Angle Scissors Set,
with 4 Spare Blades

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KV-24060-ASW	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KV-24096-ASW	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)


DMX-dimmable

Code	Max Load	Input	Output	Class 2	Environment	Size (L x W x H)
KVX-24100-4C-A	100W	100-277VAC	24V	Yes	Dry/Damp/Wet	9.05 x 3.07 x 0.98 in. (230 x 78 x 25 mm)
KVX-24150-4C-A	150W	100-277VAC	24V	No	Dry/Damp/Wet	10.90 x 3.07 x 0.98 in. (277 x 78 x 25 mm)
KVX-24200-4C-A	200W	100-277VAC	24V	No	Dry/Damp/Wet	10.90 x 3.07 x 0.98 in. (277 x 78 x 25 mm)
KVX-24300-4C-A	300W	100-277VAC	24V	No	Dry/Damp/Wet	11.85 x 3.07 x 0.98 in. (301 x 78 x 25 mm)

DMX-Decoders & Controllers Options

Type	Code	Description	Size (L x W x H)
DMX-Decoders	LT-904	4 channels output, up to 576W output power	4.80 x 4.33 x 1.46 in. (122 x 110 x 37 mm)
DMX-Decoders	LT-916	16 channels output, up to 1152W output power	7.09 x 4.80 x 1.54 in. (180 x 122 x 39 mm)
DMX-Decoders	LT-932	32 channels output, up to 1728W output power	11.81 x 4.80 x 1.54 in. (300 x 122 x 39 mm)
Controllers	DINA-DR micro	DMX 60 channels stand-alone controller with 10 scenes and USB programming	2.05 x 1.14 x 0.94 in. (52 x 29 x 24 mm)
Controllers	SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes	3.03 x 3.43 x 1.57 in. (77 x 87 x 40 mm)
Controllers	STICK-CW4	DMX 1024 channels controller with 36 scenes and 6 touch buttons	4.17 x 5.75 x 0.39 in. (106 x 146 x 10 mm)

Wiring Diagram

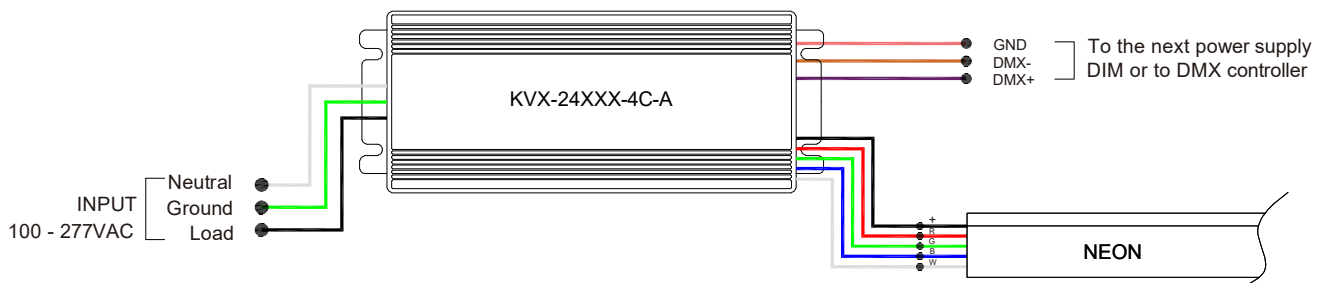

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)