

Project:	
Type:	

## KVF SERIES

Phase cut /Triac Dimmable LED Driver

### Product Features

- Constant Voltage Driver
- Universal Input: 100-277VAC
- Built-in active PFC
- Power Factor: up to 0.99
- Efficiency: up to 85%
- Load: 10-100%
- Protection: short circuit/over load/over heat
- Dry/damp locations
- Flicker-free
- Dimming options: Triac/Phase/ELV/MLV
- 0-100% dimmable with dimmer



Class P

### Product Code

MODEL
<b>KVF-24150-TDWJ</b>

CERTIFICATES
FCC UL cUL

KVF	-	XX	XXX	-	TDW	X
Series		Voltage	Power		Dimming	Enclosure
		24 -24VDC	150-150W		Phase cut/Triac Dimmable	J -Junction box

### Specifications

OUTPUT	
DC Voltage:	24V
Rated Current:	6.25A
Rated Power:	150W
Voltage Tolerance:	±0.5V
Voltage Regulation:	±0.5%
Load Regulation:	±1%

INPUT	
Voltage Range:	100-277VAC
Frequency:	47-63Hz
Power Factor (Typ.) @full load:	0.99 @120VAC 0.94 @277VAC
THD (Typ.) @full load:	<20%
Efficiency (Typ.) @full load:	85%
AC Current (Max.):	1.8A @100VAC
Inrush Current (Typ.):	15A, 50%, 1.4ms
Leakage Current:	<0.50mA

### PROTECTION

<b>Short Circuit:</b>	Shut down o/p voltage, re-power on to reset after fault condition is removed
<b>Over Loading:</b>	≤120% hiccup mode, recover automatically after fault condition is removed
<b>Over Temperature:</b>	100°C±10°C shut down o/p voltage, automatically recover after cooling

### ENVIRONMENT

<b>Working Temp.:</b>	-40~+60°C (-40° to 140°F)
<b>Working Humidity:</b>	20-90% RH, non-condensing
<b>Storage Temp., Humidity:</b>	-40~+80°C (-40° to 176°F), 10-95% RH
<b>Temp. Coefficient:</b>	±0.03%/°C (0-50°C)
<b>Vibration:</b>	10~500Hz, 5G 10min./1 cycle, period for 60min., each along X, Y, Z axis

### SAFTY & EMC

<b>Safety Standards:</b>	UL8750+UL1310
<b>Withstand Voltage:</b>	I/P-O/P: 1.88KVAC
<b>Isolation Resistance:</b>	I/P-O/P: 100MΩ/500VDC/25°C/70%RH
<b>EMC Emission:</b>	FCC Part 15 B


### OTHERS

<b>Net. Weight:</b>	1.8kg
<b>Size:</b>	10.23*4.05*1.81 inch / 260*103*46mm (L*W*H)

#### Notes:

- All parameters if NOT specially mentioned are measured at 120VAC input, under rated load and 25°C (77°F) of ambient temperature.
- To ensure the driver's long life, please derate the output when input voltage is low.


**Dimensions**

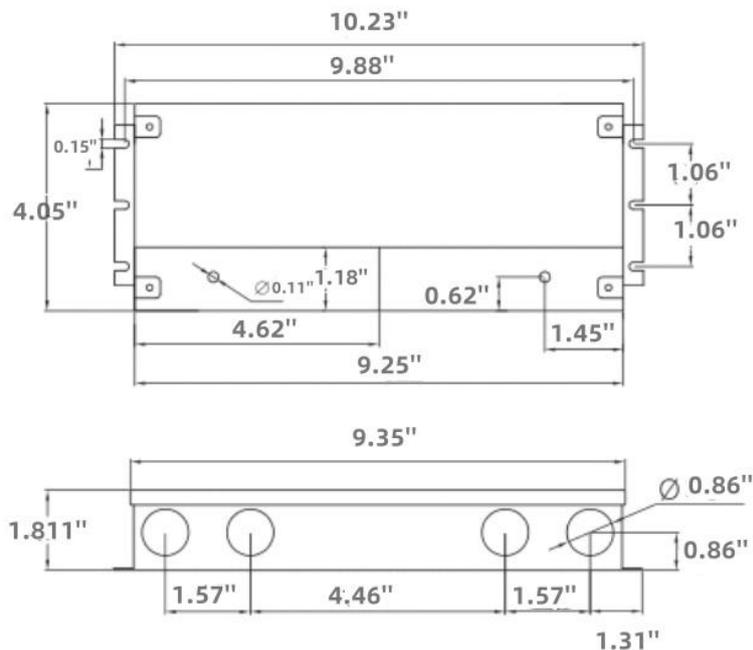


1. The input terminal has a 3-pin wire, of which the green wire is to be connected to the ground, black and white connected to AC L and N.
2. The output terminal has a 2-pin wire, red wire is V+, black wire is V-.

**Wiring Diagram**

**Triac/Phase/ELV/MLV dimming:**

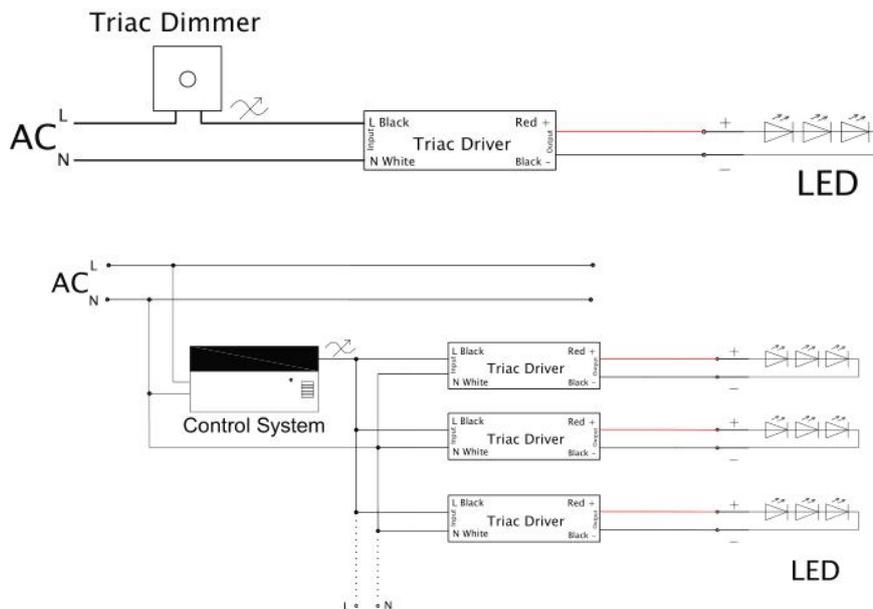

## Derating Curve

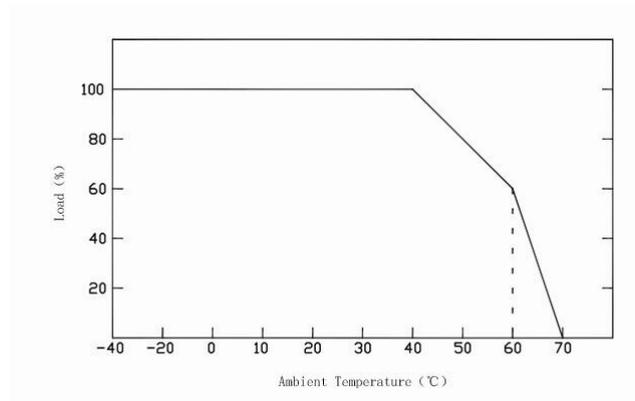

\*To ensure the driver's long life, please refer to the Derating Curve and derate according to the ambient temperature.