

Project:	
Type:	

## KVF SERIES

Phase cut /Triac Dimmable LED Driver

### Product Features

- Constant Voltage Driver
- Universal Input: 100-277VAC
- Built-in active PFC
- Power Factor: up to 0.98
- Efficiency: up to 83%
- Load: 10-100%
- Protection: short circuit/over load/over heat
- Dry/damp locations
- Flicker-free
- Dimming options: Triac/Phase/ELV/MLV
- 0-100% dimmable with dimmer



Class 2

Class P

### Product Code

MODEL
<b>KVF-24096-TDWJ</b>

CERTIFICATES
FCC UL cUL Class 2

KVF	-	XX	XXX	-	TDW	X
Series		Voltage	Power		Dimming	Enclosure
		24 -24VDC	096 -96W		Phase cut/Triac Dimmable	J - Junction box

### Specifications

OUTPUT	
<b>DC Voltage:</b>	24V
<b>Rated Current:</b>	4A
<b>Rated Power:</b>	96W
<b>Voltage Tolerance:</b>	±0.5V
<b>Voltage Regulation:</b>	±0.5%
<b>Load Regulation:</b>	±1%

INPUT	
<b>Voltage Range:</b>	100-277VAC
<b>Frequency:</b>	47-63Hz
<b>Power Factor (Typ.) @full load:</b>	0.98 @120VAC    0.96 @277VAC
<b>THD (Typ.) @full load:</b>	<20%
<b>Efficiency (Typ.) @full load:</b>	83%
<b>AC Current (Max.):</b>	1.3A @100VAC
<b>Inrush Current (Typ.):</b>	20A, 50%, 1.6ms
<b>Leakage Current:</b>	<0.50mA

### PROTECTION

<b>Short Circuit:</b>	Shut down o/p voltage, re-power on to reset after fault condition is removed
<b>Over Loading:</b>	≤120% hiccup mode, recover automatically after fault condition is removed
<b>Over Temperature:</b>	100°C±10°C shut down o/p voltage, automatically recover after cooling

### ENVIRONMENT

<b>Working Temp.:</b>	-40~+60°C (-40° to 140°F)
<b>Working Humidity:</b>	20-90% RH, non-condensing
<b>Storage Temp., Humidity:</b>	-40~+80°C (-40° to 176°F), 10-95% RH
<b>Temp. Coefficient:</b>	±0.03%/°C (0-50°C)
<b>Vibration:</b>	10~500Hz, 5G 10min./1 cycle, period for 60min., each along X, Y, Z axis

### SAFTY & EMC

<b>Safety Standards:</b>	UL8750+UL1310
<b>Withstand Voltage:</b>	I/P-O/P: 1.88KVAC
<b>Isolation Resistance:</b>	I/P-O/P: 100MΩ/500VDC/25°C/70%RH
<b>EMC Emission:</b>	FCC Part 15 B


### OTHERS

<b>Net. Weight:</b>	1.3kg
<b>Size:</b>	8.66*3.66*1.61 inch / 220*93*41mm (L*W*H)

#### Notes:

- All parameters if NOT specially mentioned are measured at 120VAC input, under rated load and 25°C (77°F) of ambient temperature.
- To ensure the driver's long life, please derate the output when input voltage is low.


**Dimensions**

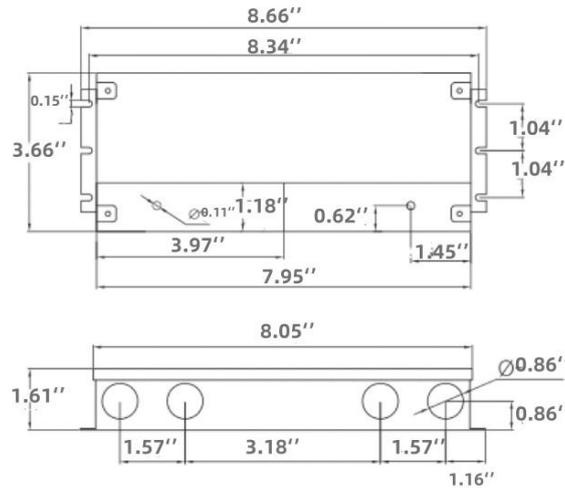


1. The input terminal has a 3-pin wire, of which the green wire is to be connected to the ground, black and white connected to AC L and N.
2. The output terminal has a 2-pin wire, red wire is V+, black wire is V-.

**Wiring Diagram**

**Triac/Phase/ELV/MLV dimming:**

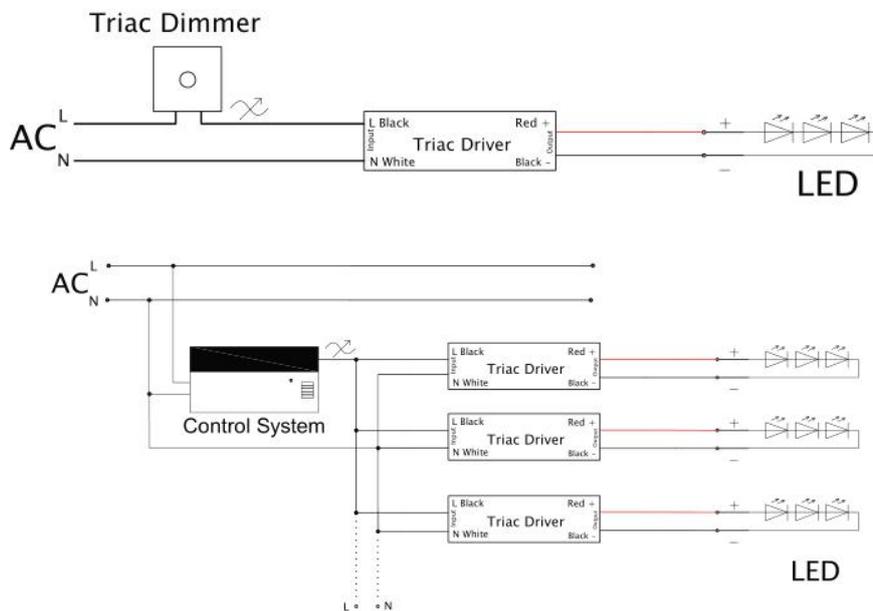

### Derating Curve

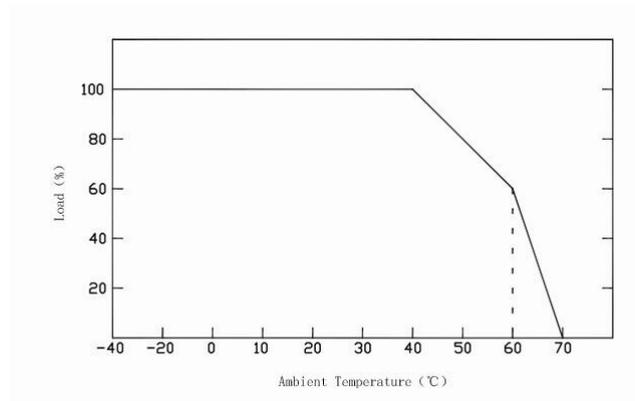

\*To ensure the driver's long life, please refer to the Derating Curve and derate according to the ambient temperature.