

AERO TAPE Indoor · Static White

Features

- Max run length up to 16.4ft (5m) from single power feed
- Field cuttable & joinable
- Low voltage DC24V
- 100-700 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty




Date _____ Fixture type _____

Project name _____ Project phase _____



Dimension

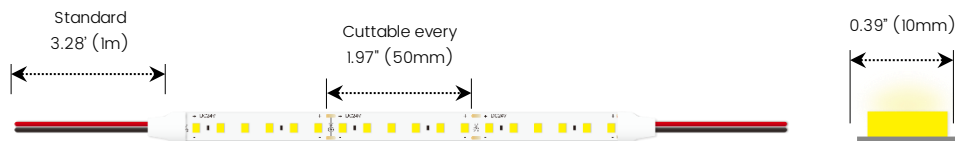

Order Code

Series	Environment	Voltage	Temp./Color	Power
AERO	D2 Dry (IP20)	24 DC24V	18 1800K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 65 6500K	146 1.46W/ft ~100 lm/ft 293 2.93W/ft ~300 lm/ft 439 4.39W/ft ~400 lm/ft 585 5.85W/ft ~600 lm/ft 732 7.32W/ft ~700 lm/ft

Assembly Builder

Left Feed Entry			Right Feed Entry			Illuminated Length		
F Front	OW	Open wire 3.28'	F Front	OW	Open wire 3.28'	Max.	16.4'	~1.46W
C Closed	MC	Male connector with 0.66" cable	C Closed	MC	Male connector with 0.66" cable		16.4'	~2.93W
	FC	Female connector with 0.66" cable		FC	Female connector with 0.66" cable		16.4'	~4.39W
	NA	Only for Closed Feed Entry		NA	Only for Closed Feed Entry		16.4'	~5.85W
							16.4'	~7.32W
						Increment	1.97"	

Temp./Color	1.46W/ft	2.93W/ft	4.39W/ft	5.85W/ft	7.32W/ft
1800K	124	252	365	489	573
2200K	129	262	379	506	594
2400K	134	271	392	524	615
2700K	142	286	414	554	650
3000K	148	299	429	577	670
3500K	148	299	432	578	678
4000K	152	308	446	596	699
6500K	149	302	437	584	685
Max. Run for Class 2 Low Voltage (ft)	16.4	16.4	16.4	13.1	10.5
Max. Run Length (ft)	16.4	16.4	16.4	16.4	16.4
Storage Temperature	-13-140°F	-13-140°F	-13-140°F	-13-140°F	-13-140°F
Ambient Temperature	-4-113°F	-4-113°F	-4-113°F	-4-113°F	-4-113°F

Technical Details

Width	0.39" (10mm)
PCB Width	0.39" (10mm)
LED Quantity	36 LEDs/ft (120 LEDs/M)
Beam Angle	120°
Efficacy	101.6lm/W @4000K 4.39W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Life (L70)	> 54,000 hours
Max. Length Per Reel	164' (50M)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG
(wire length customizable)



MC: Male connector, **Dry & Damp**. FC: Female connector, **Dry & Damp**. Standard 0.66' (20cm), 20 AWG


AERO TAPE Indoor · Static White

Channel Compatibility


: No pixelation

Universal


BE1215




BE1815




BE1415




BE2015




BE1202



BE1201




BE1207




Architectural


BE5615




BE7615




BE5315




BE4615




BE5035




BE3535



BE5075




BE8833




Main lighting


BE6575



BE9358




BE60




Special lighting

BE6728




BE2009




AERO TAPE Indoor · Static White

: slight pixelation

Universal

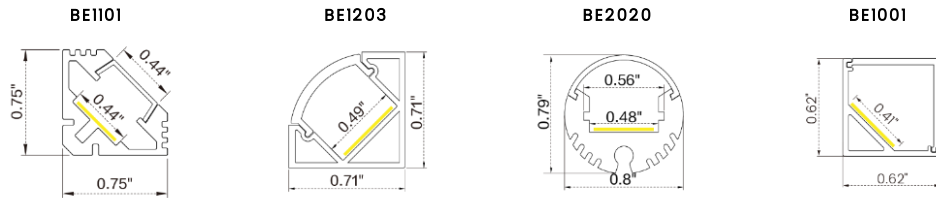

Special lighting

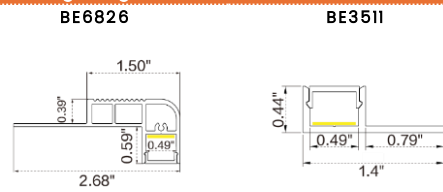

AERO TAPE Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVF-24060-TDW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.00" *2.40" *0.94"
KVF-24096-TDW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVF-24150-TDW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24200-TDW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24300-TDW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.85"

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVD-24060-DIM	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.40" *0.94"
KVD-24096-DIM	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.06" *2.75" *1.69"
KVD-24150-DIM	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVD-24200-DIM	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	13.38" *1.02" *7.28"
KVD-24300-DIM	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.13" *0.79"
KVG-24060-DW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.41" *0.94"
KVG-24096-DW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.06" *2.76" *1.69"
KVG-24150-DW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24200-DW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24300-DW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

Wiring Diagram

Non-dimmable

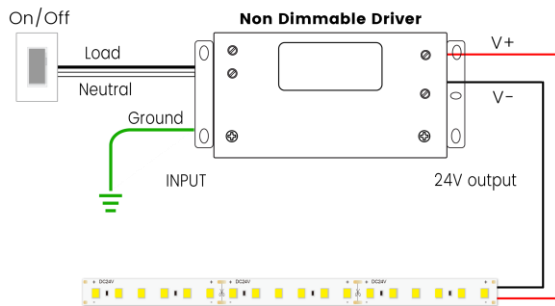

Dimmable

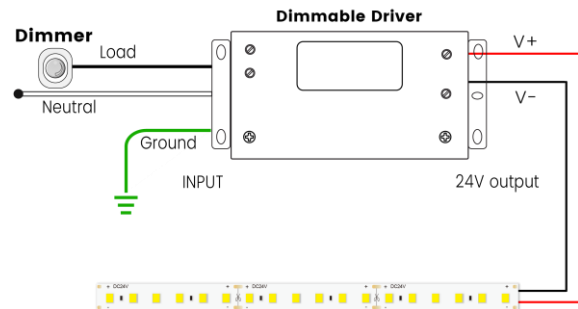

AERO TAPE Indoor · Static White

Connectors (Optional, purchase for extra)

**N6012-STCN-2P-10**

Strip to cable connector without wire, for 0.39" (10mm) tape, 2 pin

**N6012-STC-2P-10**

Strip to cable connector with 5.9" (15cm) wire, for 0.39" (10mm) tape, 2 pin

**N6012-STSJ-2P-10**

Strip to strip jumper connector with 5.9" (15cm) wire, for 0.39" (10mm) tape, 2 pin

**N6012-STD CB-2P-10**

Strip to cable with black male & female connector, for 0.39" (10mm) tape, 2 pin

**N6012-STD CW-2P-10**

Strip to cable with white male & female connector, for 0.39" (10mm) tape, 2 pin

**N6012-ST S-2P-10**

Strip to strip connector, for 0.39" (10mm) tape, 2 pin

**C6012-LC-2P-10**

L-shaped corner connector, for 0.39" (10mm) tape, 2 pin

**C6012-RC-2P-10**

R-shaped corner connector, for 0.39" (10mm) tape, 2 pin

Additional Accessories (Optional, purchase for extra)

**MCB-DC-44**

Male DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG

**FCB-DC-44**

Female DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG

**VHB**

VHB 3M adhesive back tape, stronger stickiness