

AERO TAPE WET X Outdoor · Static White

Features

- Max run length up to 16.4ft (5m) from single power feed
- Field cuttable
- Low voltage DC24V
- 100-600 lumen outputs
- IP67 rated, ideal for indoor and outdoor uses
- 5 years warranty




Date _____ Fixture type _____

Project name _____ Project phase _____



Dimension

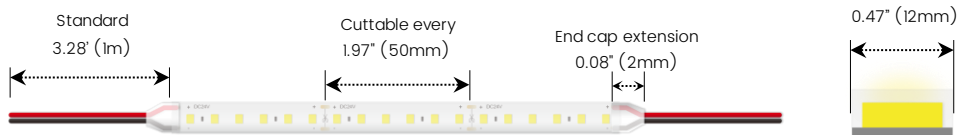

Order Code

Series	Environment	Voltage	Temp./Color	Power
AERO	W7 Wet (IP67)	24 DC24V	22 2200K	146 1.46W/ft -100 lm/ft
			24 2400K	293 2.93W/ft -200 lm/ft
			27 2700K	439 4.39W/ft -400 lm/ft
			30 3000K	585 5.85W/ft -500 lm/ft
			35 3500K	7.32 7.32W/ft -600 lm/ft
			40 4000K	
			65 6500K	

Assembly Builder

Left Feed Entry			Right Feed Entry			Illuminated Length ¹		
F	Front	OW Open wire 3.28'	F	Front	OW Open wire 3.28'	Max.	16.4'	-1.46W
C	Closed	MC Male connector with 0.98' cable	C	Closed	MC Male connector with 0.98' cable		16.4'	-2.93W
		FC Female connector with 0.98' cable			FC Female connector with 0.98' cable		16.4'	-4.39W
		NA Only for Closed Feed Entry			NA Only for Closed Feed Entry		16.4'	-5.85W
							16.4'	-7.32W
							Increment	1.97'

1. Production length = Illuminated length + End cap extension length (refer to above "Dimension" section for extension length)

Temp./Color	1.46W/ft	2.93W/ft	4.39W/ft	5.85W/ft	7.32W/ft
2200K	126	233	333	459	561
2400K	130	241	344	475	581
2700K	138	255	364	502	614
3000K	141	262	375	518	634
3500K	144	265	380	523	640
4000K	148	274	391	540	660
6500K	145	268	383	529	647
Max. Run for Class 2 Low Voltage (ft)	16.4	16.4	16.4	13.1	10.5
Max. Run Length (ft)	16.4	16.4	16.4	16.4	16.4
Storage Temperature	-13-140°F	-13-140°F	-13-140°F	-13-140°F	-13-140°F
Ambient Temperature	-4-113°F	-4-113°F	-4-113°F	-4-113°F	-4-113°F

Technical Details

Width	0.47" (12mm)
PCB Width	0.39" (10mm)
LED Quantity	36 LEDs/ft (120 LEDs/m)
Beam Angle	120°
Efficacy	89.1lm/W @4000K 4.39W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Life (L70)	> 54,000 hours
Max. Length Per Reel	98.4' (30M)

Feed Entry Options

F: Front

C: Closed



Connector Wire Options




OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG
(wire length customizable)

MC: Male connector, **Wet**
Standard 0.98' (30cm), 20 AWG

FC: Female connector, **Wet**
Standard 0.98' (30cm), 20 AWG


AERO TAPE WET X Outdoor · Static White

Channel Compatibility


: No pixelation

Architectural


BE5075



BE3535




BE5035




Main lighting


BE6575



BE9358



BE60



AERO TAPE WET X Outdoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

Phase cut / Triac-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVF-24060-TDW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.00" *2.40" *0.94"
KVF-24096-TDW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVF-24150-TDW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24200-TDW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24300-TDW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.85"

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVD-24060-DIM	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.40" *0.94"
KVD-24096-DIM	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVD-24150-DIM	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVD-24200-DIM	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	13.38" *1.02" *7.28"
KVD-24300-DIM	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.13" *0.79"
KVG-24060-DW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.41" *0.94"
KVG-24096-DW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.06" *2.76" *1.69"
KVG-24150-DW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24200-DW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24300-DW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

Wiring Diagram

Non-dimmable

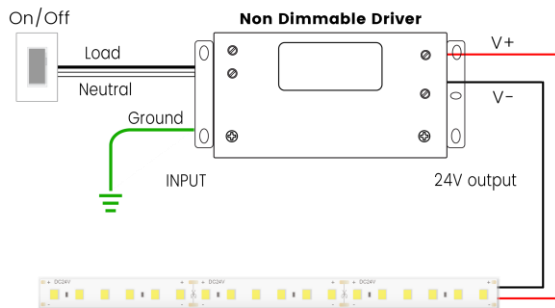

Dimmable

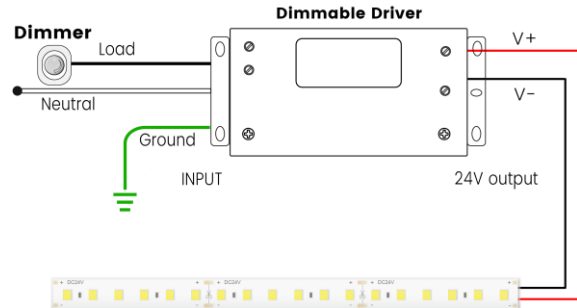

AERO TAPE WET X Outdoor · Static White

Connectors (Optional, purchase for extra)

**CL-12-67**

Mounting clip, for 0.47" (12mm) tape, IP67

**SEC-C-12-67**

Closed silicone end cap, for 0.47" (12mm) tape, IP67

Additional Accessories (Optional, purchase for extra)

**MCW-2P-67**

Male connector with 0.98' (30cm) white cable, 2 pin, IP67, Wet, 20 AWG

**FCW-2P-67**

Female connector with 0.98' (30cm) white cable, 2 pin, IP67, Wet, 20 AWG

**VHB**

VHB 3M adhesive back tape, stronger stickiness