

NOVA TAPE LONG RUN Indoor · Static White

Features

- Max run length up to 65.6ft (20m) from single power feed
- Field cuttable & joinable
- Low voltage DC24V
- 200 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date

Fixture type

Project name

Project phase



Dimension



Order Code

Series	Environment	Voltage	Temp./Color	Power
NOVALR	D2 Dry (IP20)	24 DC24V	27 2700K 30 3000K 40 4000K 65 6500K	213 2.13W/ft ~200 lm/ft

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹		
F	Front	OW	Open wire 3.28'	F	Front	OW	Open wire 3.28'	Max.	65.6'	~2.13W
C	Closed	MC	Male connector with 0.66' cable	C	Closed	MC	Male connector with 0.66' cable	Increment	1.97"	
		FC	Female connector with 0.66' cable			FC	Female connector with 0.66' cable			
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry			

Temp./Color	2.13W/ft
2700K	149
3000K	160
4000K	181
6500K	192
Max. Run for Class 2 Low Voltage (ft)	36.1
Max. Run Length (ft)	65.6
Storage Temperature	-13-140°F
Ambient Temperature	-4-113°F

Technical Details

Width	0.39" (10mm)
PCB Width	0.39" (10mm)
LED Quantity	97 LEDs/ft (320 LEDs/m)
Beam Angle	180°
Efficacy	85lm/W @4000K 2.13W
CRI	Ra ≥ 90
Life (L70)	> 54,000 hours
Max. Length Per Reel	98.4' (30M)

Feed Entry Options



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG
(wire length customizable)

MC: Male connector, **Dry & Damp**, **FC:** Female connector, **Dry & Damp**, Standard 0.66' (20cm), 20 AWG
Standard 0.66' (20cm), 20 AWG


NOVA TAPE LONG RUN Indoor · Static White

Channel Compatibility


: No pixelation

Universal


BE1215




BE1815




BE1415




BE2015




BE1202




BE1201




BE1207




BE1101




BE2020



BE1001




BE1002




Architectural


BE5615




BE7615




BE5315




BE4615




BE5035




BE3535



BE5075




BE8833




Main lighting


BE6575



BE9358





BE60




NOVA TAPE LONG RUN Indoor · Static White

Special lighting

BE6728**BE2009**

: slight pixelation

Universal

BE2601

NOVA TAPE LONG RUN Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVF-24060-TDW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.00" *2.40" *0.94"
KVF-24096-TDW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVF-24150-TDW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24200-TDW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24300-TDW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.85"

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVD-24060-DIM	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.40" *0.94"
KVD-24096-DIM	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVD-24150-DIM	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVD-24200-DIM	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	13.38" *3.07" *1.85"
KVD-24300-DIM	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.13" *0.79"
KVG-24060-DW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.41" *0.94"
KVG-24096-DW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.06" *2.76" *1.69"
KVG-24150-DW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24200-DW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24300-DW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

Wiring Diagram

Non-dimmable

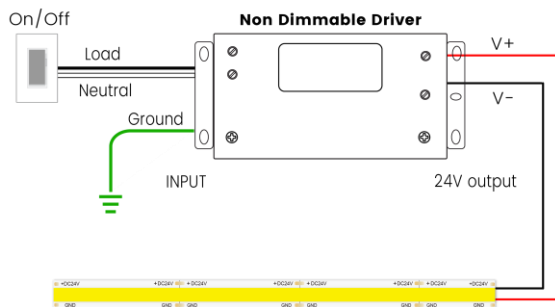

Dimmable

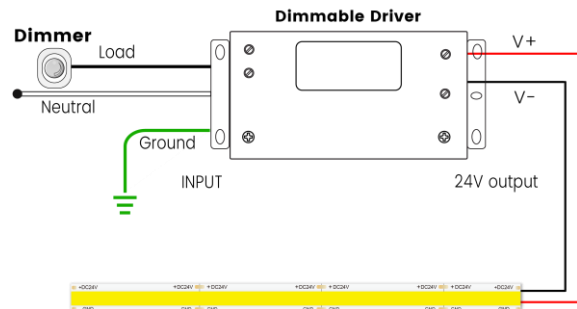

NOVA TAPE LONG RUN Indoor · Static White

Connectors (Optional, purchase for extra)

**N14CO-STCN-2P-10**

Strip to cable connector without wire, for 0.39" (10mm) tape, 2 pin

**N14CO-STC-2P-10**

Strip to cable connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 2 pin

**N14CO-STSJ-2P-10**

Strip to strip jumper connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 2 pin

**N14CO-STDCB-2P-10**

Strip to cable with black male & female connector, for 0.39" (10mm) tape, 2 pin

**N14CO-STDCW-2P-10**

Strip to cable with white male & female connector, for 0.39" (10mm) tape, 2 pin

**N14CO-STS-2P-10**

Strip to strip connector, for 0.39" (10mm) tape, 2 pin

**C14CO-LC-2P-10**

L-shaped corner connector, for 0.39" (10mm) tape, 2 pin

**C14CO-RC-2P-10**

R-shaped corner connector, for 0.39" (10mm) tape, 2 pin

**N16CO-L-2P-10**

L-shaped connector, for 0.39" (10mm) tape, 2 pin

Additional Accessories (Optional, purchase for extra)

**MCB-DC-44**

Male DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG

**FCB-DC-44**

Female DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG

**VHB**

VHB 3M adhesive back tape, stronger stickiness