

LINIO NEON 1617 SV RGBW Outdoor · Horizontal Bending · RGBW


Features

- Max run length up to 29.5ft (9m) from single power feed
- Field cuttable & joinable
- Low voltage DC24V
- 100 lumen outputs
- IP67 rated, ideal for indoor and outdoor uses
- 5 years warranty




Date _____ Fixture type _____

Project name _____ Project phase _____



Dimension

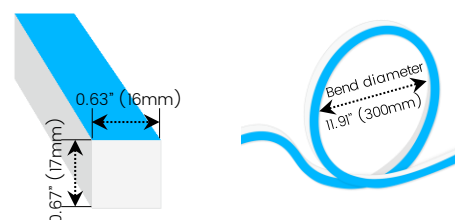

Order Code

Series	Environment	Voltage	Temp./Color	Power
LN1617SV	W7 Wet (IP67)	24 DC24V	RGBW27 RGBW (W=2700K) RGBW30 RGBW (W=3000K) RGBW35 RGBW (W=3500K) RGBW40 RGBW (W=4000K)	518 5.18W/ft ~100 lm/ft

Assembly Builder

End Cap ¹	Left Feed Entry ²	Right Feed Entry ²	Illuminated Length ³
IJ Injected (IP67)	F Front OW Open wire 3.28'	F Front OW Open wire 3.28'	Max. 29.5' ~5.18W
IJC Clear injected (IP67)	B Bottom MC Male connector with 0.98' cable	B Bottom MC Male connector with 0.98' cable	Increment 3.28'
SEC Silicone (IP67)	S Side FC Female connector with 0.98' cable	S Side FC Female connector with 0.98' cable	
MEC1 Mechanical with screws (IP67)	C Closed NA Only for Closed Feed Entry	C Closed NA Only for Closed Feed Entry	
	J Jumper	J Jumper	

1. Injected and clear injected end cap are factory-made only.

2. Jumper feed entry must be used in conjunction for wire-in and wire-out directions.

3. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap)

Temp./Color	5.18W/ft
R	19
G	56
B	13
W27	62
W30	66
W35	68
W40	69
RGBW27	148
RGBW30	151
RGBW35	151
RGBW40	153
Max. Run for Class 2 Low Voltage (ft)	14.8
Max. Run Length (ft)	29.5
Storage Temperature	-13~140°F
Ambient Temperature	-13~113°F


Technical Details

Efficacy	29.2lm/W @RGBW30 5.18W
CRI	Ra ≥ 80
Beam Angle	110°
Life (L70)	> 30,000 hours
Max. Length Per Reel	98.4' (30M)
Finish	Matte


LINIO NEON 1617 SV RGBW Outdoor · Horizontal Bending · RGBW

Feed Entry / End Cap Options


IJ: Injected end cap – IP67, factory-made only

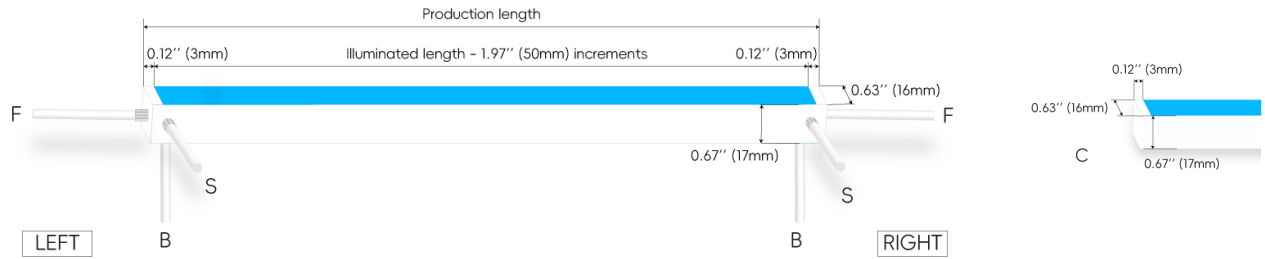


IJC: Clear injected end cap – IP67, factory-made only

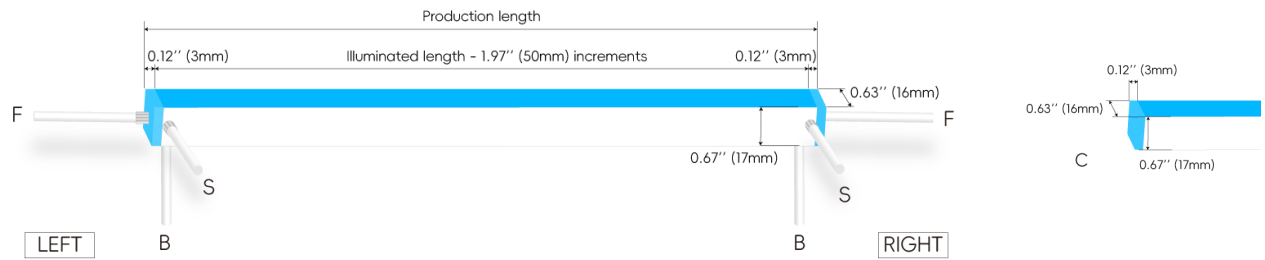

SEC: Silicone end cap – IP67

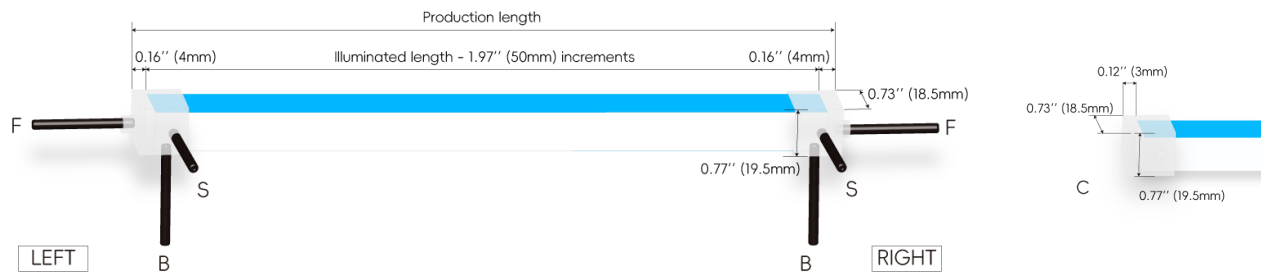

MECI: Mechanical end cap with screws – IP67

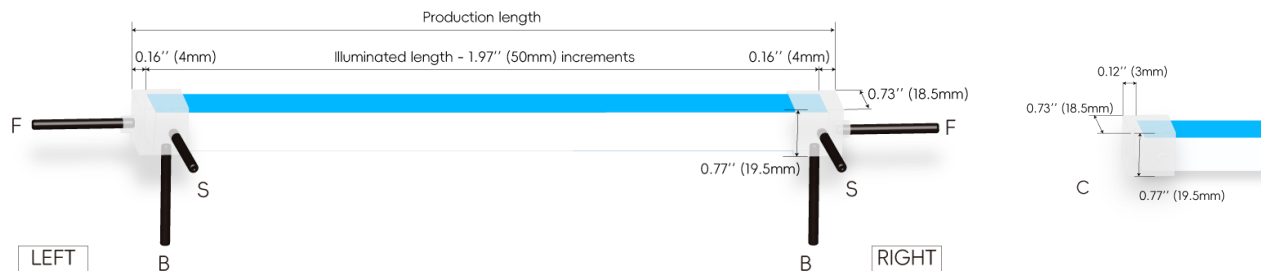

Connector Wire Options



OW: Open wire, **Dry** only
Standard 3.28' (1m), 20 AWG (wire length customizable)



MC: Male connector, **Wet**
Standard 0.98' (30cm), 20 AWG




FC: Female connector, **Wet**
Standard 0.98' (30cm), 20 AWG

LINIO NEON 1617 SV RGBW


Outdoor · Horizontal Bending · RGBW

Mounting Options




LN1617-SC

Name	Straight surface channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-BC

Name	Bendable surface channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-RC

Name	Straight recessed channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-MC

Name	Mud-in channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-BMC

Name	Bendable mud-in channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-LBC

Name	Light-block channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-PC

Name	PC channel
Material	Polycarbonate
Standard Length	3.28' (1M)



LN1617-CL

Name	Mounting clip
Material	Aluminum
Standard Length	0.98' (25MM)



LN1617-LS

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	0.79' (20MM)

LINIO NEON 1617 SV RGBW Outdoor · Horizontal Bending · RGBW

**LN1617-AC**

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	1" (25.5MM)

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

DMX512-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVX-24096-4C-A	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *3.07" *0.98"
KVX-24150-4C-A	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.90" *3.07" *0.98"
KVX-24200-4C-A	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.90" *3.07" *0.98"
KVX-24300-4C-A	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	11.85" *3.07" *0.98"

DMX Decoders


Code	Description
LT-904	4 channels output, up to 576W output power
LT-916	16 channels output, up to 1152W output power
LT-932	32 channels output, up to 2304W output power

Controllers


Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-GA2	DMX 512 channels, ready to use (pre-loaded with 8 scenes and 170 RGB fixtures)
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram

DMX Control System

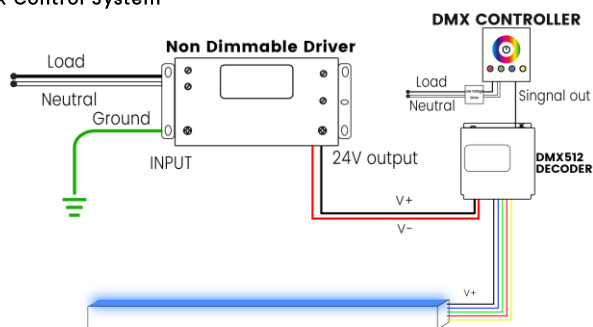

DMX Driver System

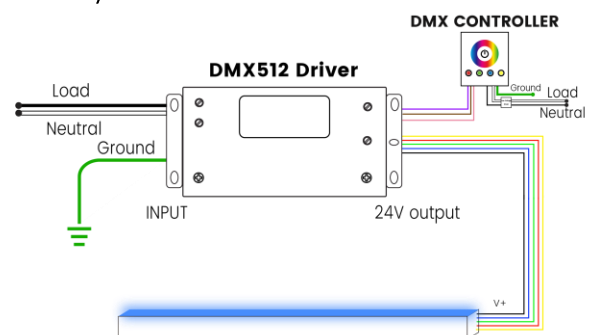

LINIO NEON 1617 SV RGBW

Outdoor · Horizontal Bending · RGBW

Connectors (Optional, purchase for extra)



LN1617-SEC-C
Silicone closed end cap



LN1617-SEC-F-5P
Silicone end cap front entry with 0.98' (30cm) cable, 5 pin



LN1617-SEC-S-5P
Silicone end cap side entry with 0.98' (30cm) cable, 5 pin



LN1617-SEC-B-5P
Silicone end cap bottom entry with 0.98' (30cm) cable, 5 pin



LN1617-MEC1-C
Mechanical closed end cap with screws



LN1617-MEC1-F-5P
Mechanical end cap with screws, front entry with 0.98' (30cm) cable, 5 pin



LN1617-MEC1-LS-5P
Mechanical end cap with screws, left side entry with 0.98' (30cm) cable, 5 pin



LN1617-MEC1-RS-5P
Mechanical end cap with screws, right side entry with 0.98' (30cm) cable, 5 pin



LN1617-MEC1-B-5P
Mechanical end cap with screws, bottom entry with 0.98' (30cm) cable, 5 pin



LN1617-JC-F-5P
Jumper connector front entry with 0.23' (7cm) cable, 5 pin, IP67

Additional Accessories (Optional, purchase for extra)



MCW-5P-67
Male connector with 0.98' (30cm) white cable, 5 pin, IP67, Wet, 20 AWG



FCW-5P-67
Female connector with 0.98' (30cm) white cable, 5 pin, IP67, Wet, 20 AWG



MCB-5P-67
Male connector with 0.98' (30cm) black cable, 5 pin, IP67, Wet, 20 AWG



FCB-5P-67
Female connector with 0.98' (30cm) black cable, 5 pin, IP67, Wet, 20 AWG