

LINIO NEON 1617 SV PIXEL RGBW

Outdoor · Horizontal Bending · Pixel RGBW

Features

- Addressable dynamic color, 3 pixels/ft
- Field cuttable & joinable
- Low voltage DC24V
- 100 lumen outputs
- IP67 rated, ideal for indoor and outdoor uses
- 5 years warranty



Date

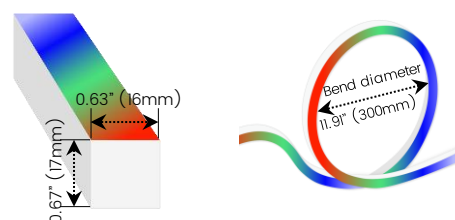
Fixture type

Project name

Project phase



Dimension



Order Code

Series	Environment	Voltage	Temp./Color	Power
LN1617SV	W7 Wet (IP67)	24 DC24V	PRGBW27 Pixel RGBW (W=2700K) PRGBW30 Pixel RGBW (W=3000K) PRGBW35 Pixel RGBW (W=3500K) PRGBW40 Pixel RGBW (W=4000K)	457 4.57W/ft ~100 lm/ft

Assembly Builder

End Cap ¹	Left Feed Entry ²	Right Feed Entry ²	Illuminated Length ³
IJ Injected (IP67)	F Front OW Open wire 3.28'	F Front OW Open wire 3.28'	Max. 32.8' ~4.57W
IJC Clear injected (IP67)	B Bottom PMC Male connector with 0.98' cable	B Bottom PMC Male connector with 0.98' cable	Increment 3.28'
SEC Silicone (IP67)	S Side PFC Female connector with 0.98' cable	S Side PFC Female connector with 0.98' cable	
MEC1 Mechanical with screws (IP67)	C Closed NA Only for Closed Feed Entry	C Closed NA Only for Closed Feed Entry	
	J Jumper	J Jumper	

1. Injected and clear injected end cap are factory-made only.

2. Jumper feed entry must be used in conjunction for wire-in and wire-out directions.

3. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap)

Temp./Color	4.57W/ft
R	13
G	35
B	10
W27	40
W30	43
W35	44
W40	44
RGBW27	94
RGBW30	98
RGBW35	98
RGBW40	99
Max. Run for Class 2 Low Voltage (ft)	26.2
Max. Run Length (ft)	32.8
Storage Temperature	-13~140°F
Ambient Temperature	-13~113°F

Technical Details

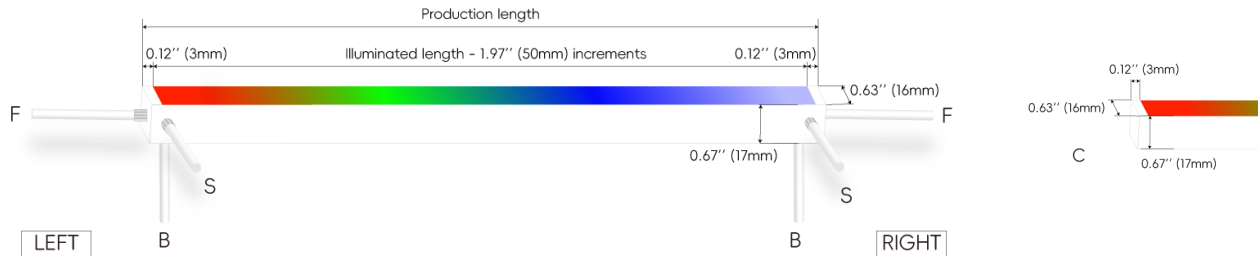
Efficacy	21.4lm/W @RGBW30 4.57W
CRI	Ra ≥ 80
Beam Angle	110°
Life (L70)	> 30,000 hours
Max. Length Per Reel	98.4' (30M)
Dimming	DMX
IC Type	USC512CL
Pixel/ft	3
Finish	Matte

LINIO NEON 1617 SV PIXEL RGBW

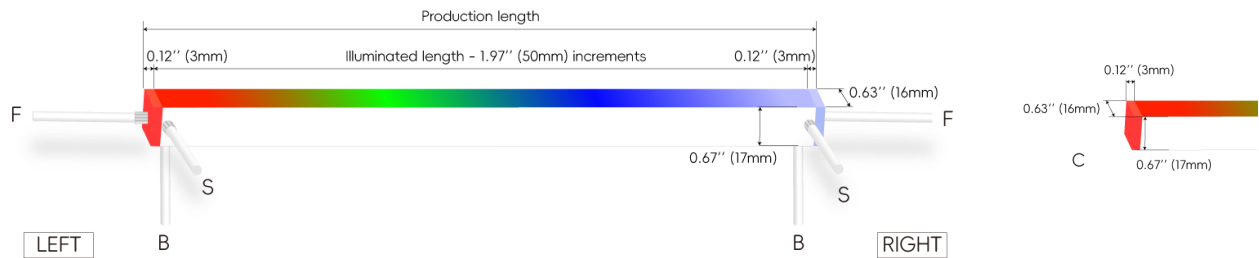
Outdoor · Horizontal Bending · Pixel RGBW

Feed Entry / End Cap Options

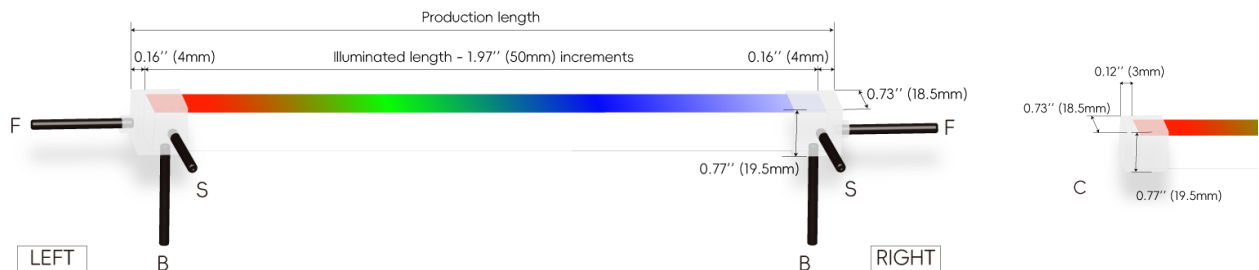
IJ: Injected end cap – IP67, factory-made only



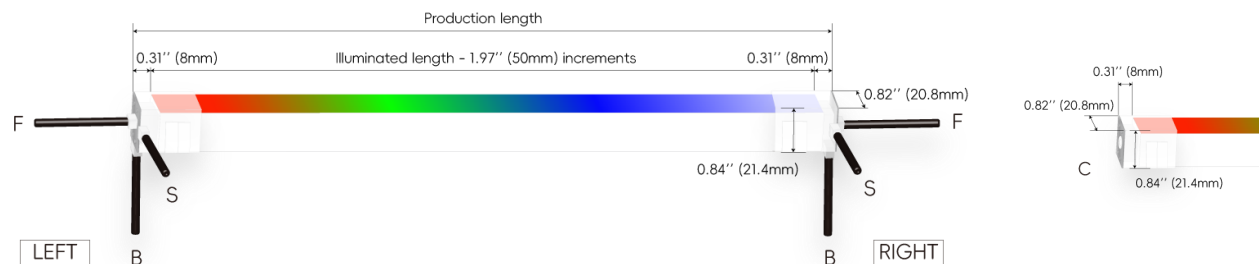
IJC: Clear injected end cap – IP67, factory-made only



SEC: Silicone end cap – IP67



MECI: Mechanical end cap with screws – IP67



Connector Wire Options

**OW:** Open wire, **Dry** only

Standard 3.28' (1m), 20 AWG (wire length customizable)

**PMC:** Male connector, **Wet**

Standard 0.98' (30cm), 22 AWG


**PFC:** Female connector, **Wet**

Standard 0.98' (30cm), 22 AWG


LINIO NEON 1617 SV PIXEL RGBW

Outdoor · Horizontal Bending · Pixel RGBW


Mounting Options

**LN1617-SC**


Name	Straight surface channel
Material	Aluminum
Standard Length	3.28' (1M)

**LN1617-BC**


Name	Bendable surface channel
Material	Aluminum
Standard Length	3.28' (1M)

**LN1617-RC**


Name	Straight recessed channel
Material	Aluminum
Standard Length	3.28' (1M)

**LN1617-MC**


Name	Mud-in channel
Material	Aluminum
Standard Length	3.28' (1M)

**LN1617-BMC**


Name	Bendable mud-in channel
Material	Aluminum
Standard Length	3.28' (1M)

**LN1617-LBC**


Name	Light-block channel
Material	Aluminum
Standard Length	3.28' (1M)

**LN1617-PC**

Name	PC channel
Material	Polycarbonate
Standard Length	3.28' (1M)

**LN1617-CL**

Name	Mounting clip
Material	Aluminum
Standard Length	0.98' (25MM)

**LN1617-LS**

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	0.79' (20MM)

LINIO NEON 1617 SV PIXEL RGBW

Outdoor · Horizontal Bending · Pixel RGBW

**LN1617-AC**

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	1" (25.5MM)

Drivers**Non-dimmable**

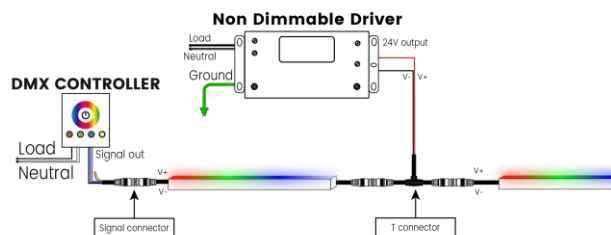
Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

DMX Decoders

Code	Description
LT-904	4 channels output, up to 576W output power
LT-916	16 channels output, up to 1152W output power
LT-932	32 channels output, up to 2304W output power

Controllers

Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-GA2	DMX 512 channels, ready to use (pre-loaded with 8 scenes and 170 RGB fixtures)
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram**Dimmable**

LINIO NEON 1617 SV PIXEL RGBW

Outdoor · Horizontal Bending · Pixel RGBW

Connectors (Optional, purchase for extra)



LN1617-SEC-C
Silicone closed end cap



LN1617-SEC-F-5P
Silicone end cap front entry with 0.98' (30cm) cable, 5 pin



LN1617-SEC-S-5P
Silicone end cap side entry with 0.98' (30cm) cable, 5 pin



LN1617-SEC-B-5P
Silicone end cap bottom entry with 0.98' (30cm) cable, 5 pin



LN1617-MEC1-C
Mechanical closed end cap with screws



LN1617-MEC1-F-5P
Mechanical end cap with screws, front entry with 0.98' (30cm) cable, 5 pin



LN1617-MEC1-LS-5P
Mechanical end cap with screws, left side entry with 0.98' (30cm) cable, 5 pin



LN1617-MEC1-RS-5P
Mechanical end cap with screws, right side entry with 0.98' (30cm) cable, 5 pin



LN1617-MEC1-B-5P
Mechanical end cap with screws, bottom entry with 0.98' (30cm) cable, 5 pin



LN1617-JC-F-5P
Jumper connector front entry with 0.23' (7cm) cable, 5 pin, IP67

Additional Accessories (Optional, purchase for extra)



PMCW-5P-67
Male connector with 0.98' (30cm) white cable, 5 pin, IP67, Wet, 22 AWG



PFCW-5P-67
Female connector with 0.98' (30cm) white cable, 5 pin, IP67, Wet, 22 AWG



PMCB-5P-67
Male connector with 0.98' (30cm) black cable, 5 pin, IP67, Wet, 22 AWG



PFCB-5P-67
Female connector with 0.98' (30cm) black cable, 5 pin, IP67, Wet, 22 AWG



SC-5P-67
Signal connector, 5 pin, IP67, Wet, standard 20' (6m), **customizable**



MSC-5P-67
Male signal connector, 5 pin, IP67, Wet, standard 20' (6m), **customizable**



FSC-5P-67
Female signal connector, 5 pin, IP67, Wet, standard 20' (6m), **customizable**



NC-5P-67
Network signal connector, 5 pin, IP67, Wet, standard 20' (6m), **customizable**



MFTCB-5P-67
Male and female T-shaped connector with black cable, 5 pin, IP67, Wet