

LINIO NEON 1617 TV Outdoor · Vertical Bending · Static White


Features

- Max run length up to 91.8ft (28m) from single power feed
- Field cuttable & joinable
- Low voltage DC24V
- 100-300 lumen outputs
- IP67 rated, ideal for indoor and outdoor uses
- 5 years warranty



Date	Fixture type
Project name	Project phase

Dimension

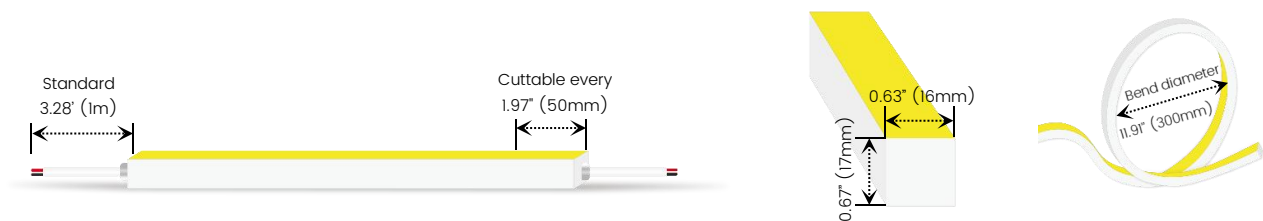

Order Code

Series	Environment	Voltage	Temp./Color	Power
LIN1617TV	W7	Wet (IP67)	24	DC24V
			22	2200K
			27	2700K
			30	3000K
			35	3500K
			40	4000K
			53	5300K
			146	1.46W/ft
			293	2.93W/ft
			439	4.39W/ft
				-100 lm/ft
				-200 lm/ft
				-300 lm/ft

Assembly Builder

End Cap ¹	Left Feed Entry ²	Right Feed Entry ²	Illuminated Length ³
IJ Injected (IP67)	F Front OW Open wire 3.28'	F Front OW Open wire 3.28'	Max. 91.8' -1.46W
IJC Clear injected (IP67)	B Bottom MC Male connector with 0.98' cable	B Bottom MC Male connector with 0.98' cable	65.6' -2.93W
SEC Silicone (IP67)	S Side FC Female connector with 0.98' cable	S Side FC Female connector with 0.98' cable	49.2' -4.39W
MECI Mechanical with screws (IP67)	C Closed NA Only for Closed Feed Entry	C Closed NA Only for Closed Feed Entry	Increment 1.97'
	J Jumper	J Jumper	

1. Injected and clear injected end cap are factory-made only.

2. Jumper feed entry must be used in conjunction for wire-in and wire-out directions.

3. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap)

Temp./Color	1.46W/ft	2.93W/ft	4.39W/ft
2200K	115	202	291
2700K	118	209	301
3000K	126	217	318
3500K	133	234	336
4000K	133	233	335
5300K	126	220	317
Max. Run for Class 2 Low Voltage (ft)	52.6	26.2	17.5
Max. Run Length (ft)	91.8	65.6	49.2
Storage Temperature	-13-140°F	-13-140°F	-13-140°F
Ambient Temperature	-13-113°F	-13-113°F	-13-113°F

Technical Details

Efficacy	79.5lm/W @4000K 2.93W
CRI	Ra≥ 90
Beam Angle	110°
LED MacAdam	2 steps
Life (L70)	> 102,000 hours
Max. Length Per Reel	98.4' (30M)
Finish	Matte


LINIO NEON 1617 TV Outdoor · Vertical Bending · Static White

Feed Entry / End Cap Options

IJ: Injected end cap – IP67, factory-made only



IJC: Clear injected end cap – IP67, factory-made only

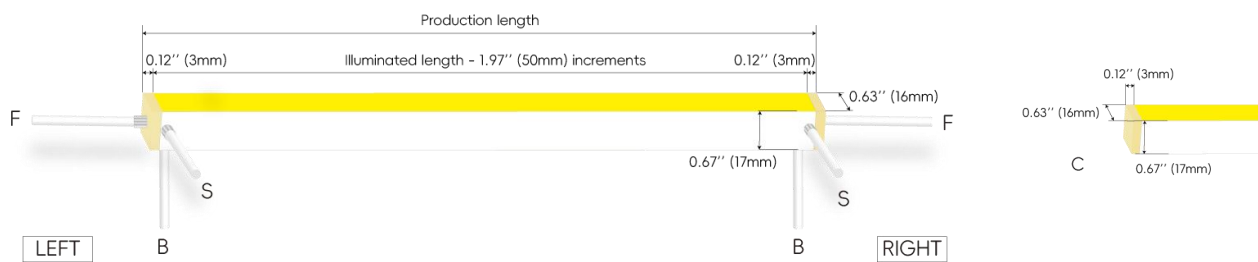

SEC: Silicone end cap – IP67



MECI: Mechanical end cap with screws – IP67



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 18 AWG (wire length customizable)




MC: Male connector, **Wet**
Standard 0.98' (30cm), 18 AWG



FC: Female connector, **Wet**
Standard 0.98' (30cm), 18 AWG


LINIO NEON 1617 TV Outdoor · Vertical Bending · Static White

Mounting Options




LN1617-SC

Name	Straight surface channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-BC

Name	Bendable surface channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-RC

Name	Straight recessed channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-MC

Name	Mud-in channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-BMC

Name	Bendable mud-in channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-LBC

Name	Light-block channel
Material	Aluminum
Standard Length	3.28' (1M)




LN1617-PC

Name	PC channel
Material	Polycarbonate
Standard Length	3.28' (1M)



LN1617-CL


Name	Mounting clip
Material	Aluminum
Standard Length	0.98' (25MM)



LN1617-LS

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	0.79' (20MM)

LINIO NEON 1617 TV Outdoor · Vertical Bending · Static White



LN1617-AC

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	1" (25.5MM)

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVF-24060-TDW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.00" *2.40" *0.94"
KVF-24096-TDW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVF-24150-TDW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24200-TDW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24300-TDW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.85"

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVD-24060-DIM	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.40" *0.94"
KVD-24096-DIM	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVD-24150-DIM	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVD-24200-DIM	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	13.38" *11.02" *7.28"
KVD-24300-DIM	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.13" *0.79"
KVG-24060-DW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.41" *0.94"
KVG-24096-DW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.06" *2.76" *1.69"
KVG-24150-DW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24200-DW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24300-DW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

Wiring Diagram

Non-dimmable

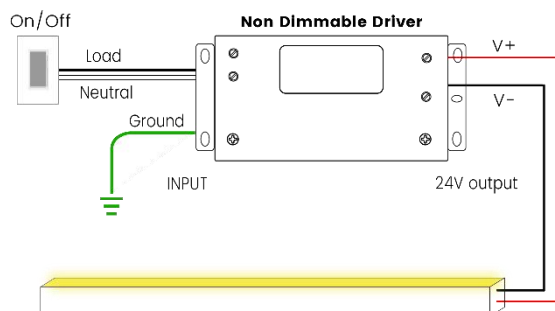

Triac Dimmable

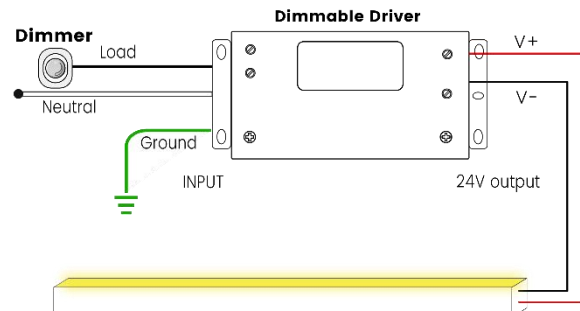

LINIO NEON 1617 TV Outdoor · Vertical Bending · Static White

Connectors (Optional, purchase for extra)



LNI617-SEC-C
Silicone closed end cap



LNI617-SEC-F-2P
Silicone end cap front entry with 0.98' (30cm) cable, 2 pin



LNI617-SEC-S-2P
Silicone end cap side entry with 0.98' (30cm) cable, 2 pin



LNI617-SEC-B-2P
Silicone end cap bottom entry with 0.98' (30cm) cable, 2 pin



LNI617-MECI-C
Mechanical closed end cap with screws



LNI617-MECI-F-2P
Mechanical end cap with screws, front entry with 0.98' (30cm) cable, 2 pin



LNI617-MECI-LS-2P
Mechanical end cap with screws, left side entry with 0.98' (30cm) cable, 2 pin



LNI617-MECI-RS-2P
Mechanical end cap with screws, right side entry with 0.98' (30cm) cable, 2 pin



LNI617-MECI-B-2P
Mechanical end cap with screws, bottom entry with 0.98' (30cm) cable, 2 pin



LNI617-JC-F-2P
Jumper connector front entry with 0.23' (7cm) cable, 2 pin, IP67

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector with 0.98' (30cm) white cable, 2 pin, IP67, Wet, 18 AWG



FCW-2P-67
Female connector with 0.98' (30cm) white cable, 2 pin, IP67, Wet, 18 AWG



MCB-2P-67
Male connector with 0.98' (30cm) black cable, 2 pin, IP67, Wet, 18 AWG



FCB-2P-67
Female connector with 0.98' (30cm) black cable, 2 pin, IP67, Wet, 18 AWG