

AERO TAPE WAVE Indoor · Static White

Features

- Flexible with an adjustable bending angle of up to 90°
- Field cuttable & joinable
- Low voltage DC24V
- 100-300 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date


Fixture type

Project name

Project phase



Dimension

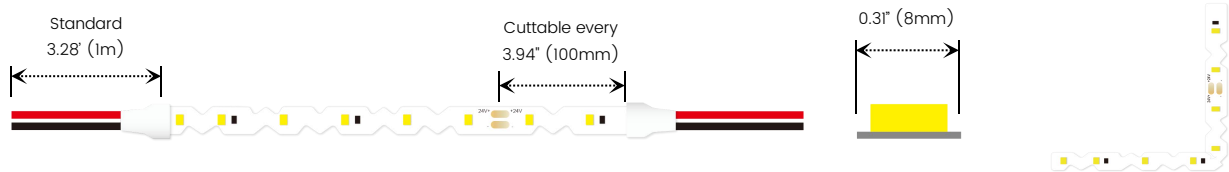

Order Code

Series	Environment	Voltage	Temp./Color	Power
AEROW	D2	Dry (IP20)	24	DC24V
			18	1800K
			22	2200K
			24	2400K
			27	2700K
			30	3000K
			35	3500K
			40	4000K
			65	6500K
			146	1.46W/ft
			299	2.99W/ft
			366	3.66W/ft
				~100 lm/ft
				~200 lm/ft
				~300 lm/ft

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹	
F	Front	OW	Open wire 3.28'	F	Front	OW	Open wire 3.28'	Max.	16.4'
C	Closed	MC	Male connector with 0.66' cable	C	Closed	MC	Male connector with 0.66' cable		16.4'
		FC	Female connector with 0.66' cable			FC	Female connector with 0.66' cable		16.4'
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry	Increment	3.94'

1. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap)

Temp./Color	1.46W/ft	2.99W/ft	3.66W/ft
1800K	114	230	281
2200K	118	239	291
2400K	123	247	301
2700K	129	261	318
3000K	134	270	329
3500K	135	272	332
4000K	139	281	342
6500K	136	275	335
Max. Run for Class 2 Low Voltage (ft)	16.4	16.4	16.4
Max. Run Length (ft)	16.4	16.4	16.4
Storage Temperature	-13~140°F	-13~140°F	-13~140°F
Ambient Temperature	-4~104°F	-4~104°F	-4~104°F

Technical Details

Width	0.31" (8mm)
PCB Width	0.31" (8mm)
LED Quantity	18 LEDs/ft (60 LEDs/M)
Beam Angle	120°
Efficacy	94lm/W @3000K 2.99W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Life (L70)	> 54,000 hours
Max. Length Per Reel	164' (50M)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG
(wire length customizable)



MC: Male connector, **Dry & Damp**
Standard 0.66' (20cm), 20 AWG



FC: Female connector, **Dry & Damp**
Standard 0.66' (20cm), 20 AWG


AERO TAPE WAVE Indoor · Static White

Channel Compatibility


: No pixelation

Architectural


BE5075




BE3535




BE5035




BE1615



BE1204




BE5615




Main lighting


BE6575



BE9358




BE60




Universal

BE1205




BE1002



: Slight pixelation


Architectural

BE7615



Special lighting

BE6728



AERO TAPE WAVE Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVF-24060-TDW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.00" *2.40" *0.94"
KVF-24096-TDW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVF-24150-TDW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24200-TDW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24300-TDW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.85"

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVD-24060-DIM	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.40" *0.94"
KVD-24096-DIM	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVD-24150-DIM	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVD-24200-DIM	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	13.38" *11.02" *7.28"
KVD-24300-DIM	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.13" *0.79"
KVG-24060-DW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.41" *0.94"
KVG-24096-DW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.06" *2.76" *1.69"
KVG-24150-DW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24200-DW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24300-DW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

Wiring Diagram

Non-dimmable

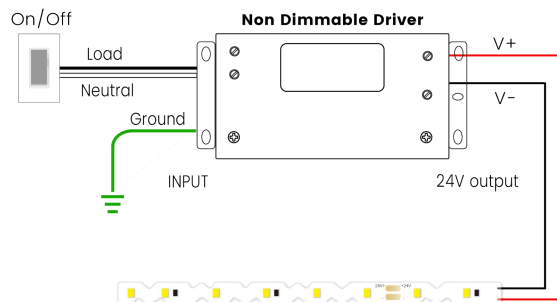

Dimmable

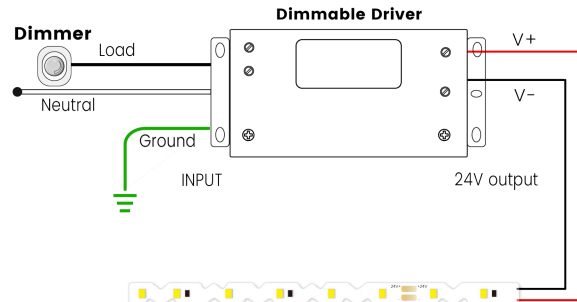

AERO TAPE WAVE Indoor · Static White

Connectors (Optional, purchase for extra)



- N60CO-STCN-2P-8**
Strip to cable connector without wire, for 0.31" (8mm) tape, 2 pin
- N60CO-STC-2P-8**
Strip to cable connector with 5.91" (15cm) wire, for 0.31" (8mm) tape, 2 pin
- N60CO-STSJ-2P-8**
Strip to strip jumper connector with 5.91" (15cm) wire, for 0.31" (8mm) tape, 2 pin
- N60CO-STDCB-2P-8**
Strip to cable with black male & female connector, for 0.31" (8mm) tape, 2 pin
- N60CO-STDCW-2P-8**
Strip to cable with white male & female connector, for 0.31" (8mm) tape, 2 pin

Additional Accessories (Optional, purchase for extra)



- MCB-DC-44**
Male DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG
- FCB-DC-44**
Female DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG
- VHB**
VHB 3M adhesive back tape, stronger stickiness