

NOVA TAPE COLORS

Indoor · Chromatic Color

Features

- Dot-free, diverse chromatic color options
- Field cuttable & joinable
- Low voltage DC24V
- 50-350 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date


Fixture type

Project name

Project phase



Dimension

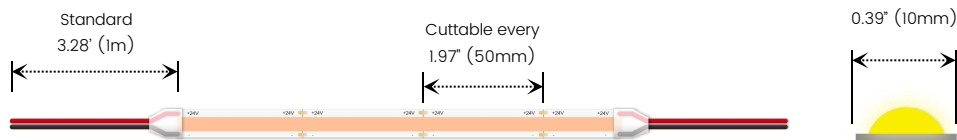

Order Code

Series	Environment	Voltage	Temp./Color	Power
NOVA	D2 Dry (IP20)	24 DC24V	R Red G Green B Blue A Amber P Purple Y Yellow PK Pink	305 3.05W/ft ~50-350 lm/ft

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹	
F	Front	OW	Open wire 3.28'	F	Front	OW	Open wire 3.28'	Max.	16.4'
C	Closed	MC	Male connector with 0.66' cable	C	Closed	MC	Male connector with 0.66' cable	Increment	1.97'
		FC	Female connector with 0.66' cable			FC	Female connector with 0.66' cable		
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry		

Temp./Color	3.05W/ft
Red	55
Green	345
Blue	66
Amber	77
Purple	171
Yellow	151
Pink	210
Max. Run for Class 2 Low Voltage (ft)	16.4
Max. Run Length (ft)	16.4
Storage Temperature	-13~140°F
Ambient Temperature	-4~113°F

Technical Details

Width	0.39" (10mm)
PCB Width	0.39" (10mm)
LED Quantity	146 LEDs/ft (480 LEDs/M)
Beam Angle	180°
Efficacy	18lm/W @Red 3.05W
Life (L70)	> 54,000 hours
Max. Length Per Reel	98.4' (30M)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG
(wire length customizable)



MC: Male connector, **Dry & Damp**
Standard 0.66' (20cm), 20 AWG



FC: Female connector, **Dry & Damp**
Standard 0.66' (20cm), 20 AWG

NOVA TAPE COLORS


Indoor · Chromatic Color

Channel Compatibility


: No pixelation

Universal


BE1215




BE1815




BE1415




BE2015




BE1202




BE1201




BE1207




BE101




BE2020



BE1001




BE1002




Architectural


BE5615




BE7615




BE5315




BE4615




BE5035




BE3535



BE5075




BE8833




Main lighting


BE6575



BE9358



BE60




NOVA TAPE COLORS


Indoor · Chromatic Color

Special lighting

BE6728




BE2009




: Slight pixelation

Universal


BE2601



BEI204



BEI205



NOVA TAPE COLORS

Indoor · Chromatic Color

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVF-24060-TDW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.00" *2.40" *0.94"
KVF-24096-TDW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVF-24150-TDW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KVF-24200-TDW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KVF-24300-TDW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.85"

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVD-24060-DIM	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.40" *0.94"
KVD-24096-DIM	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVD-24150-DIM	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVD-24200-DIM	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	13.38" *11.02" *7.28"
KVD-24300-DIM	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.13" *0.79"
KVG-24060-DW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.41" *0.94"
KVG-24096-DW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.06" *2.76" *1.69"
KVG-24150-DW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24200-DW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24300-DW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

Wiring Diagram

Non-dimmable

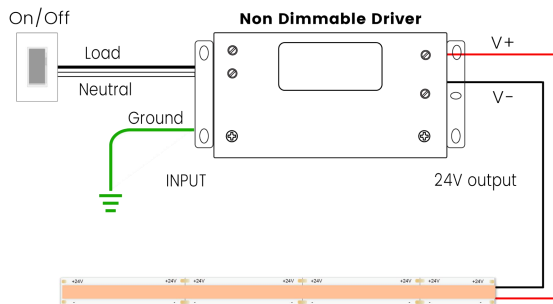

Dimmable

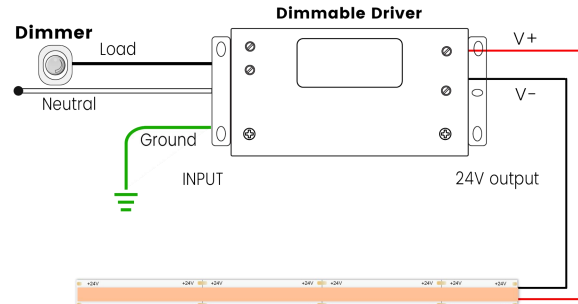

NOVA TAPE COLORS Indoor · Chromatic Color

Connectors (Optional, purchase for extra)



NI4CO-STCN-2P-10
Strip to cable connector without wire, for 0.39" (10mm) tape, 2 pin



NI4CO-STC-2P-10
Strip to cable connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 2 pin



NI4CO-STSJ-2P-10
Strip to strip jumper connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 2 pin



NI4CO-STDCB-2P-10
Strip to cable with black male & female connector, for 0.39" (10mm) tape, 2 pin



NI4CO-STDCW-2P-10
Strip to cable with white male & female connector, for 0.39" (10mm) tape, 2 pin



NI4CO-STSS-2P-10
Strip to strip connector, for 0.39" (10mm) tape, 2 pin



CI4CO-LC-2P-10
L-shaped corner connector, for 0.39" (10mm) tape, 2 pin



CI4CO-RC-2P-10
R-shaped corner connector, for 0.39" (10mm) tape, 2 pin



NI6CO-L-2P-10
L-shaped connector, for 0.39" (10mm) tape, 2 pin

Additional Accessories (Optional, purchase for extra)



MCB-DC-44
Male DC connector with 0.66" (20cm) cable, IP44, Dry & damp, 20 AWG



FCB-DC-44
Female DC connector with 0.66" (20cm) cable, IP44, Dry & damp, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness