

LINIO NEON 360° RGBW

All-direction Bending · RGBW

Features

- 360° emitting provides unparalleled creative
- Factory assembly
- Low voltage DC24V
- 100 lumen outputs
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty



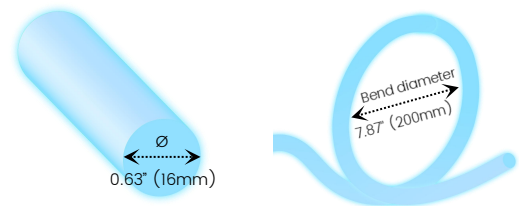
Date _____ Fixture type _____

Project name _____ Project phase _____



Dimension

Standard
3.28' (1m)



Order Code

Series	Environment	Voltage	Temp./Color	Power
LIN360	W5 Wet (IP65)	24 DC24V	RGBW22 RGBW (W=2200K) RGBW27 RGBW (W=2700K) RGBW30 RGBW (W=3000K) RGBW35 RGBW (W=3500K) RGBW40 RGBW (W=4000K) RGBW45 RGBW (W=4500K)	488 4.88W/ft ~100 lm/ft

Assembly Builder

End Cap ¹	Left Feed Entry	Right Feed Entry	Illuminated Length ²
IJ Injected (IP65)	F Front OW Open wire 3.28' S Side MC Male connector with 0.98' cable C Closed FC Female connector with 0.98' cable NA Only for Closed Feed Entry	F Front OW Open wire 3.28' S Side MC Male connector with 0.98' cable C Closed FC Female connector with 0.98' cable NA Only for Closed Feed Entry	Max. 16.4' ~4.88W

1. Injected and clear injected end cap are factory-made only.

2. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap)

Temp./Color	4.88W/ft
R	14
G	44
B	8
W22	45
W27	50
W30	50
W35	51
W40	51
W45	51
RGBW22	110
RGBW27	113
RGBW30	113
RGBW35	114
RGBW40	114
RGBW45	114
Max. Run for Class 2 Low Voltage (ft)	15.7
Max. Run Length (ft)	16.4
Storage Temperature	-13~140°F
Ambient Temperature	-13~113°F

Technical Details

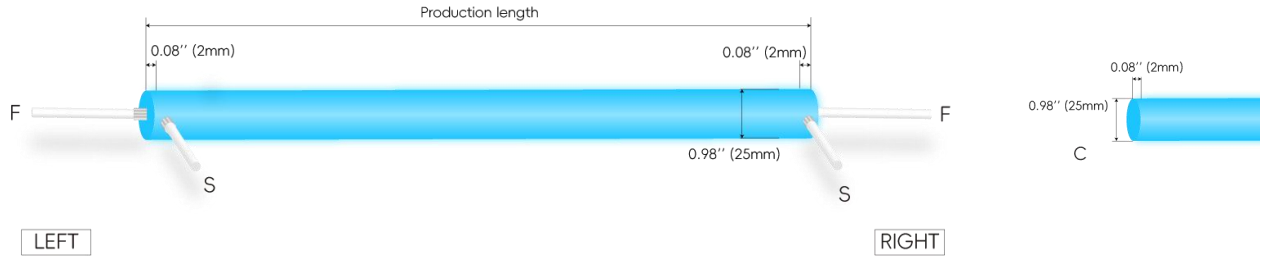
Efficacy	23.2lm/W @RGBW30 4.88W
CRI	Ra ≥ 90
Beam Angle	360°
LED MacAdam	3 steps
Life (L70)	> 30,000 hours
Max. Length Per Reel	16.4' (5M)
Finish	Matte

LINIO NEON 360° RGBW

All-direction Bending · RGBW

Feed Entry / End Cap Options

IJ: Injected end cap – IP65, factory-made only



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG (wire length customizable)




MC: Male connector, **Wet**
Standard 0.98' (30cm), 20 AWG




FC: Female connector, **Wet**
Standard 0.98' (30cm), 20 AWG


Mounting Options

**LN360-SFC-O**


Name Surface mount clear bracket-open clip

**LN360-SFC-C**


Name Surface mount clear bracket-closed clip

**LN360-SFC-L**


Name Surface mount clear bracket-low profile clip

**LN360-SFC-PC**


Name Surface mount clear bracket-PC channel

**LN360-SPC-O**


Name Suspended mount clear bracket-open clip

**LN360-SPC-C**

Name Suspended mount clear bracket-closed clip

**LN360-SPC-PC**


Name Suspended mount clear bracket-PC channel

**LN360-TLC-O**


Name Telescoping clear bracket-open clip (Adjustable Length: 20'-39')

LINIO NEON 360° RGBW


All-direction Bending · RGBW

**LN360-TLC-C**


Name Telescoping clear bracket-closed clip (Adjustable Length: 20-39")

**LN360-TLC-L**


Name Telescoping clear bracket-low profile clip (Adjustable Length: 20-39")

**LN360-TLC-PC**


Name Telescoping clear bracket-PC channel (Adjustable Length: 20-39")

**LN360-VB**


Name Vertical metal flush surface mount bracket-black

**LN360-VSB**


Name Vertical pendant suspended mount bracket-black

**LN360-UB**


Name U-shaped metal flush mount bracket-black

**LN360-JNB-S**


Name Metal joiner bracket-black (side cable entry only)

**LN360-JNB-C**

Name Metal joiner bracket-black (closed end cap)

**LN360-JNC-S**

Name Joiner bracket-clear (side cable entry only)

**LN360-JNC-C**

Name Joiner bracket-clear (closed end cap)

LINIO NEON 360° RGBW

All-direction Bending · RGBW

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

DMX512-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KVX-24096-4C-A	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *3.07" *0.98"
KVX-24150-4C-A	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.90" *3.07" *0.98"
KVX-24200-4C-A	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.90" *3.07" *0.98"
KVX-24300-4C-A	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	11.85" *3.07" *0.98"

DMX Decoders

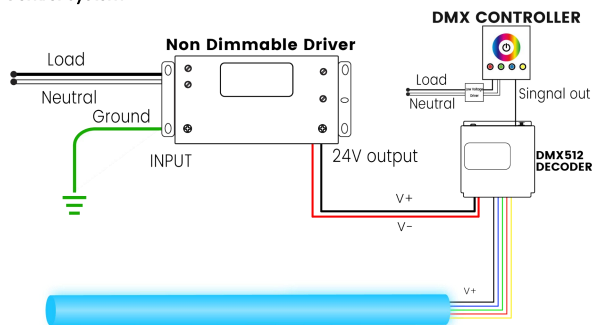
Code	Description
LT-904	4 channels output, up to 576W output power
LT-916	16 channels output, up to 1152W output power
LT-932	32 channels output, up to 2304W output power

Controllers

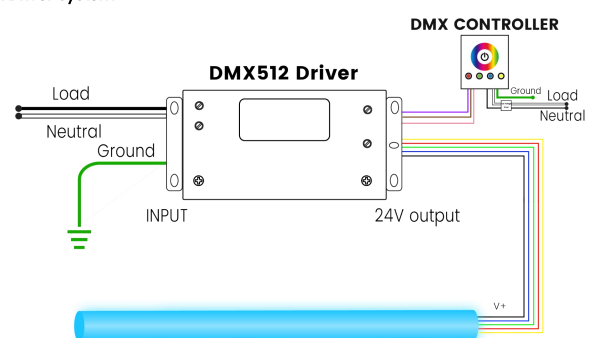
Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-GA2	DMX 512 channels, ready to use (pre-loaded with 8 scenes and 170 RGB fixtures)
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram


DMX Control System



DMX Driver System



Additional Accessories (Optional, purchase for extra)



MCW-5P-67

Male connector with 0.98' (30cm)
white cable, 5 pin, IP67, Wet, 20 AWG

FCW-5P-67

Female connector with 0.98' (30cm)
white cable, 5 pin, IP67, Wet, 20 AWG

MCB-5P-67

Male connector with 0.98' (30cm)
black cable, 5 pin, IP67, Wet, 20 AWG

FCB-5P-67

Female connector with 0.98' (30cm)
black cable, 5 pin, IP67, Wet, 20 AWG