

ANNO TAPE TW Indoor · Tunable White

Features

- Max run length up to 16.4ft (5m) from single power feed
- Field cuttable & joinable
- Low voltage DC24V
- 400 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date _____ Fixture type _____

Project name _____ Project phase _____



Dimension



Order Code

Series	Environment	Voltage	Temp./Color	Power
ANNO	D2 Dry (IP20)	24 DC24V	2765 2700K+6500K	457 4.57W/ft ~400 lm/ft

Assembly Builder

Left Feed Entry				Right Feed Entry			Illuminated Length ¹		
F Front	OW	Open wire 3.28'		F Front	OW	Open wire 3.28'	Max.	16.4'	~4.57W
C Closed	MC	Male connector with 0.98' cable		C Closed	MC	Male connector with 0.98' cable	Increment	1.09'	
	FC	Female connector with 0.98' cable			FC	Female connector with 0.98' cable			
	NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry			

Temp./Color	4.57W/ft
2700K	200
6500K	252
2700K+6500K	454
Max. Run for Class 2 Low Voltage (ft)	16.4
Max. Run Length (ft)	16.4
Storage Temperature	-13~140°F
Ambient Temperature	~4~113°F

Technical Details

Width	0.39" (10mm)
PCB Width	0.39" (10mm)
LED Quantity	175 LEDs/ft (576 LEDs/M)
Beam Angle	180°
Efficacy	99.3lm/w @2700K+6500K 4.57W
CRI	Ra≥90
Life (L70)	> 54,000 hours
Max. Length Per Reel	98.4' (30M)

Feed Entry Options



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG (wire length customizable)

MC: Male connector, **Wet**
Standard 0.98' (30cm), 20 AWG


FC: Female connector, **Wet**
Standard 0.98' (30cm), 20 AWG

ANNO TAPE TW Indoor · Tunable White


Channel Compatibility

: No pixelation


Universal

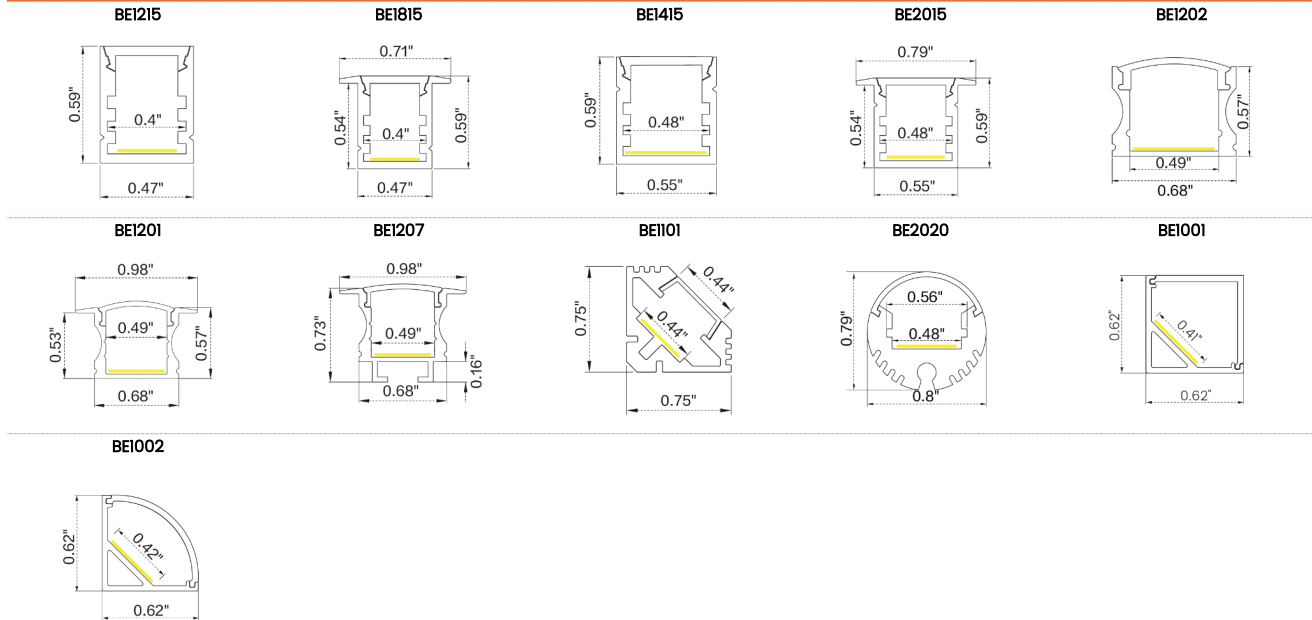

Architectural

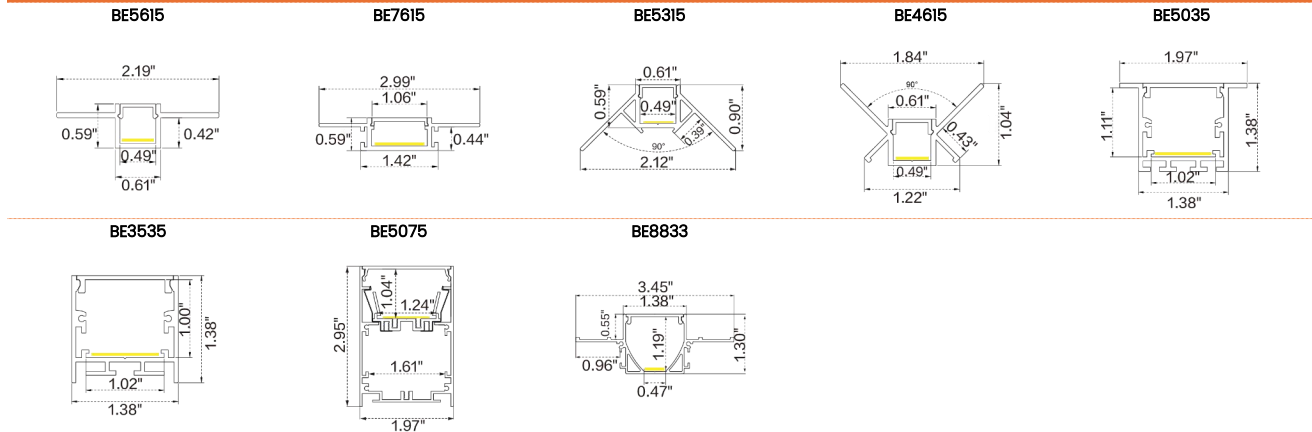


Main lighting

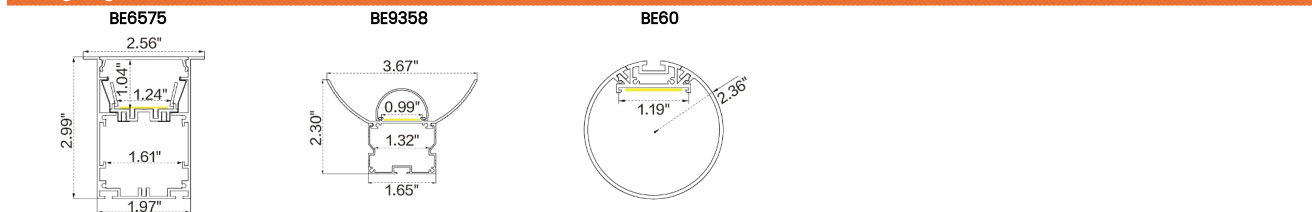


ANNO TAPE TW Indoor · Tunable White

Special lighting

BE6728




BE2009




: Slight pixelation

Universal


BE2601



BE1204



BE1205




Drivers

0-10V Dimmable


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
LM-100-24-U2A2	100W	100-277VAC	24V	Yes	No	Dry	13.86" *1.69" *1.18"

Wiring Diagram

PWM Dimmable

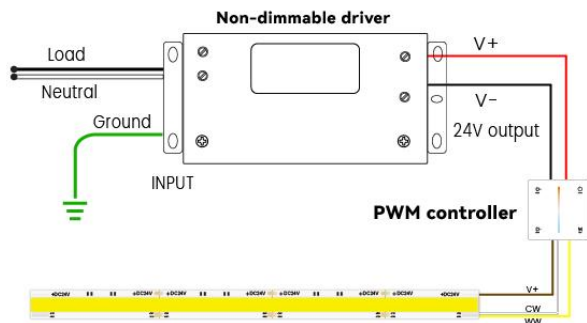

0-10V Dimmable

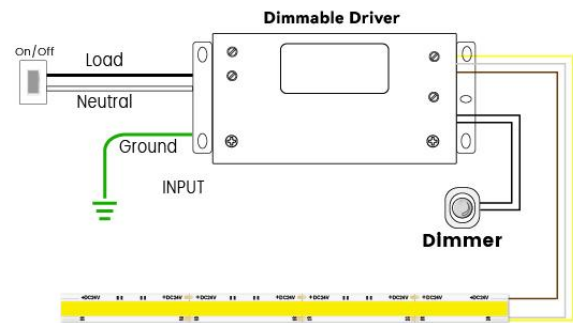

ANNO TAPE TW Indoor · Tunable White

Connectors (Optional, purchase for extra)



NCO-STCN-3P-10
Strip to cable connector without wire, for 0.39" (10mm) tape, 3 pin



NCO-STC-3P-10
Strip to cable connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 3 pin



NCO-STSJ-3P-10
Strip to strip jumper connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 3 pin



NCO-STMKB-3P-10
Strip to cable with black male & female connector, for 0.39" (10mm) tape, 3 pin



NCO-STMKW-3P-10
Strip to cable with white male & female connector, for 0.39" (10mm) tape, 3 pin



NIACO-STS-3P-10
Strip to strip connector, for 0.39" (10mm) tape, 3 pin

Additional Accessories (Optional, purchase for extra)



MCW-3P-67
Male connector with 0.98" (30cm) white cable, 3 pin, IP67, Wet, 20 AWG



FCW-3P-67
Female connector with 0.98" (30cm) white cable, 3 pin, IP67, Wet, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness