

# Beamever

## LINIO NEON 360° RGBW

Designer's Custom Playground

All-direction Bending · RGBW

### Features

- 360 degree emitting, with changeable RGBW colors
- IP67 rated, ideal for outdoor uses
- 5 years warranty

### Applications

Libraries, coffee shops, offices, lobbies, malls, studios, etc.



Date

Fixture type


Project name

Project phase

### Bending Directions & Diameters

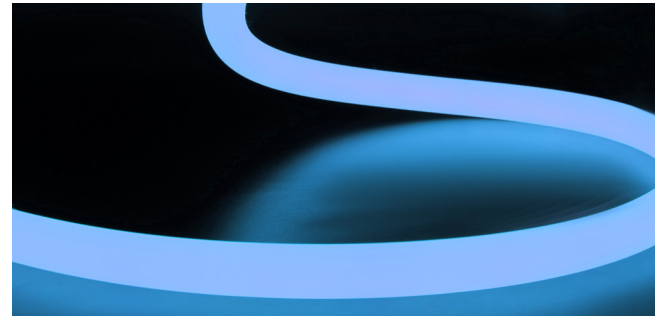

### Dimensions

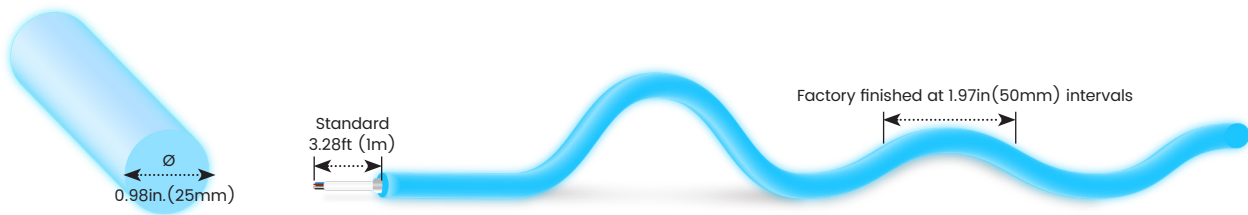

### Order Code

### Assembly Builder

Model	Environment	Voltage	CCT	Power	End Cap	Left Feed Entry
LN360	W7-Wet (IP67)	24V-DC24V	RGBW22K-RGBW2200K RGBW27K-RGBW2700K RGBW30K-RGBW3000K RGBW35K-RGBW3500K RGBW40K-RGBW4000K RGBW45K-RGBW4500K	4.9-4.88W/ft	FT Flush Translucent	F Front <b>OW</b> Open wire 3.28ft (1m) S Side <b>MC</b> Male connector with 11.81in. (300mm) cable C Closed <b>FC</b> Female connector with 11.81in. (300mm)cable <b>NA</b> Only for Closed Feed Entry

### Assembly Builder

### Mounting Order Code

Right Feed Entry			Length	
F	Front	<b>OW</b> Open wire 3.28ft (1m)	<b>Max. nominal</b>	16.4ft (5m)
S	Side	<b>MC</b> Male connector with 11.81in. (300mm) cable	<b>Increment</b>	1.97in. (50mm)
C	Closed	<b>FC</b> Female connector with 11.81in. (300mm)cable		
		<b>NA</b> Only for Closed Feed Entry		

Product Code
--------------

Please select on the Mounting Options page

\*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

# Beamever

## LINIO NEON 360° RGBW

Designer's Custom Playground

All-direction Bending · RGBW

### Lumen Output (lm/ft)

CCT	4.88W/ft
■ R	20
■ G	58
■ B	14
■ W22K	58
■ W27K	64
■ W30K	66
■ W35K	68
■ W40K	69
■ W45K	72
■ RGBW22K	140
■ RGBW27K	152
■ RGBW30K	155
■ RGBW35K	158
■ RGBW40K	164
■ RGBW45K	170

Max. Run for Class 2\* 16.4ft (5m)  
 Max. Run Supported Length 16.4ft (5m)


\*Typically installations in USA and Canada comply with Class 2 requirements

### Technical Details

Efficacy	32lm/W @RGBW30K 4.88W
CRI	Ra≥90
Beam Angle	360°
Average Life (L80B10)	>38,000 hours
Storage Temperature	-40°F~-140°F (-40°C~ 60°C)
Operating Temperature	-40°F~-113°F (-40°C~ 45°C)

### Photometry

LN360-W7-24V-RGBW30K-4.9-FT-F-OW-F-OW  
 LINIO NEON 360° RGBW, All-direction Bend, RGBW30K, 4.88W/ft

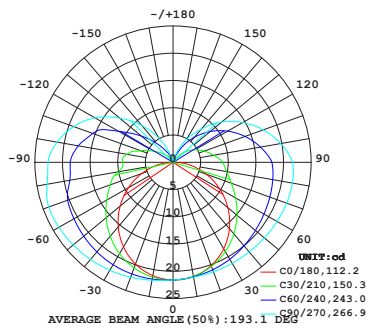


Zonal Lumen Summary

Zone	Lumen	% Fixture
0-30	17.6	11.5%
0-40	29.9	19.6%
0-60	59.7	39.0%
0-90	106.0	69.3%
0-180	153.0	100.0%

### Feed Entry / End Cap Options


FT: Flush Translucent – IP67, factory-made only

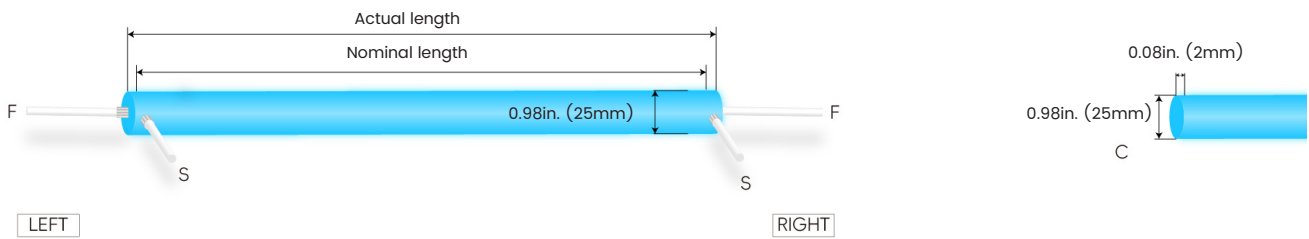


### Connector Wire Options



**OW:** Open wire, **Dry only**  
 Standard 11.81in. (300mm), 20 AWG,  
 wire length customizable




**MC:** Male connector, **Wet**  
 Standard 11.81in. (300mm), 20 AWG



**FC:** Female connector, **Wet**  
 Standard 11.81in. (300mm), 20 AWG


**Mounting Options**



**NF60-SFC-O**

Name Surface mount clear bracket-open clip


Material PC



**NF60-SFC-C**

Name Surface mount clear bracket-closed clip

Material PC



**NF60-SFC-L**

Name Surface mount clear bracket-low profile clip


Material PC



**NF60-SFC-PC**

Name Surface mount clear bracket-PC channel


Material PC

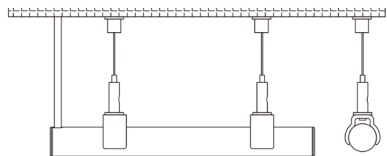

**NF60-SPC-O**

Name Suspended mount clear bracket-open clip


Material Stainless Steel, PC

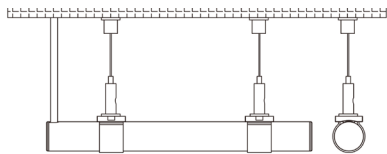

**NF60-SPC-C**

Name Suspended mount clear bracket-closed clip

Material Stainless Steel, PC

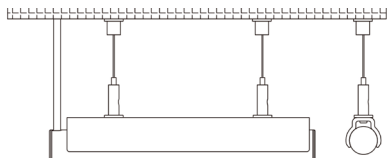


**NF60-SPC-PC**

Name Suspended mount clear bracket-PC channel


Material Stainless Steel, PC

**Mounting Options**

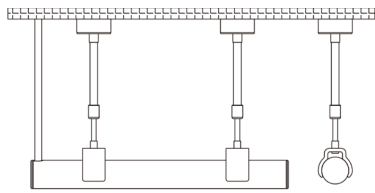


**NF60-TLC-O**

Name	Telescoping white bracket-open clip
Material	PC
Adjustable Length	19.69-39.37in.(500-1000mm)

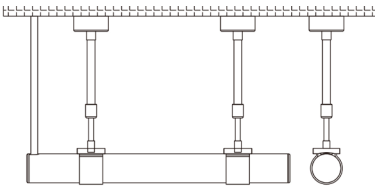


**NF60-TLC-C**

Name	Telescoping white bracket-closed clip
Material	PC
Adjustable Length	19.69-39.37in.(500-1000mm)

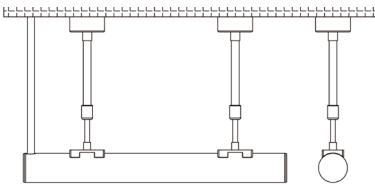


**NF60-TLC-L**

Name	Telescoping white bracket-low profile clip
Material	PC
Adjustable Length	19.69-39.37in.(500-1000mm)

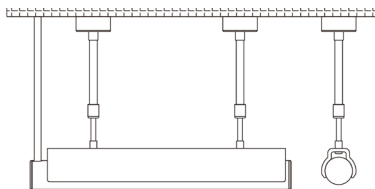


**NF60-TLC-PC**

Name	Telescoping white bracket-PC channel
Material	PC
Adjustable Length	19.69-39.37in.(500-1000mm)




**NF60-VB**

Name	Vertical metal flush surface mount bracket-black
Material	Aluminum



**NF60-UB**


Name	U-shaped metal flush mount bracket-black
Material	Aluminum

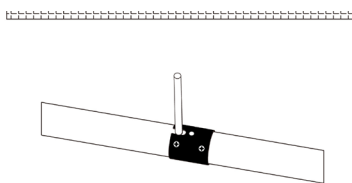

**NF60-JNB-S**


Name	Metal joiner bracket-black (side cable entry only)
Material	Aluminum

**Mounting Options**




**NF60-JNB-C**

Name	Metal joiner bracket-black (closed end cap)
Material	Aluminum



**NF60-JNC-S**

Name	Joiner bracket-clear (side cable entry only)
Material	PC



**NF60-JNC-C**

Name	Joiner bracket-clear (closed end cap)
Material	PC

**Additional Accessories (Optional, purchase for extra)**



**MCW-5P-67**  
 Male connector,  
 11.81in. (300mm) white cable,  
 5 pin, IP67, Wet, 20 AWG



**FCW-5P-67**  
 Female connector,  
 11.81in. (300mm) white cable,  
 5 pin, IP67, Wet, 20 AWG



**MCB-5P-67**  
 Male connector,  
 11.81in. (300mm) black cable,  
 5 pin, IP67, Wet, 20 AWG



**FCB-5P-67**  
 Female connector,  
 11.81in. (300mm) black cable,  
 5 pin, IP67, Wet, 20 AWG

**Drivers**

**Non-dimmable**

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (155 x 54 x 20mm)
KV-24060-ASW	60W	100-277VAC	24V	Yes	No	Dry/Damp	7 x 2.4 x 0.9in. (178 x 61 x 24mm)
KV-24096-ASW	96W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (230 x 70 x 43mm)


**DMX-dimmable**

Code	Max Load	Input	Output	Class 2	Environment	Size (L x W x H)
KVX-24100-4C-A	100W	100-277VAC	24V	Yes	Dry/Damp/Wet	9.05 x 3.07 x 0.98 in. (230 x 78 x 25 mm)
KVX-24150-4C-A	150W	100-277VAC	24V	No	Dry/Damp/Wet	10.90 x 3.07 x 0.98 in. (277 x 78 x 25 mm)
KVX-24200-4C-A	200W	100-277VAC	24V	No	Dry/Damp/Wet	10.90 x 3.07 x 0.98 in. (277 x 78 x 25 mm)
KVX-24300-4C-A	300W	100-277VAC	24V	No	Dry/Damp/Wet	11.85 x 3.07 x 0.98 in. (301 x 78 x 25 mm)

**DMX-Decoders & Controllers Options**

Type	Code	Description	Size (L x W x H)
DMX-Decoders	LT-904	4 channels output, up to 576W output power	4.80 x 4.33 x 1.46 in. (122 x 110 x 37 mm)
DMX-Decoders	LT-916	16 channels output, up to 1152W output power	7.09 x 4.80 x 1.54 in. (180 x 122 x 39 mm)
DMX-Decoders	LT-932	32 channels output, up to 1728W output power	11.81 x 4.80 x 1.54 in. (300 x 122 x 39 mm)
Controllers	DINA-DR micro	DMX 60 channels stand-alone controller with 10 scenes and USB programming	2.05 x 1.14 x 0.94 in. (52 x 29 x 24 mm)
Controllers	SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes	3.03 x 3.43 x 1.57 in. (77 x 87 x 40 mm)
Controllers	STICK-CW4	DMX 1024 channels controller with 36 scenes and 6 touch buttons	4.17 x 5.75 x 0.39 in. (106 x 146 x 10 mm)

**Wiring Diagram**

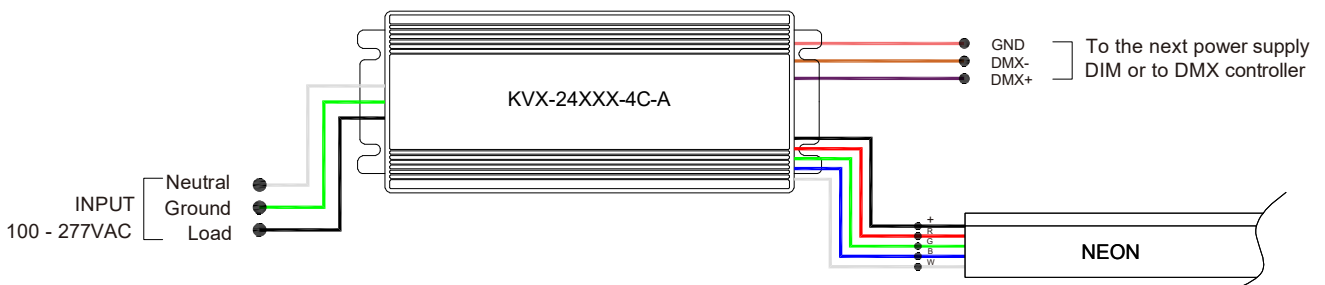

**LINIO NEON 360° RGBW**

All-direction Bending · RGBW

**24V Voltage Drop & Maximum Wire Length Chart**

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)